

Product Specifications

Hot Service Case



MODEL SHOWN: GMS4H

NOTE: INTERIOR PANS NOT PROVIDED W/CASE - GMS4H = (3) FULL & (3) 1/3 SIZE 4"D PANS,
 GMS6H = (5) FULL & (5) 1/3 SIZE 4"D PANS, GMS8H = (7) FULL & (7) 1/3 SIZE 4"D PANS

- GMS4H
- GMS6H
- GMS8H

Lengths include 1-1/8" end panels
 51"L x 42-3/4"D x 51-5/8"H
 75-3/8"L x 42-3/4"D x 51-5/8"H
 99-3/4"L x 42-3/4"D x 51-5/8"H

STANDARD FEATURES


- Designed for dry heat
- Incandescent bulbs & infrared overhead heat
- Independently heated wells controlled by thermostat
- Integrated average product temperature of 160°F
- One year parts & labor warranty
- Stainless steel interior
- Stainless steel rear exterior
- Terminal block

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
LOWER FRONT PANEL COLOR	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel
TRIM COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Silver
BASE	<input type="checkbox"/> Rail system for shims	<input type="checkbox"/> 6"H legs
END PANEL LEFT	<input type="checkbox"/> Cutaway with glass	<input type="checkbox"/> Full end panel w/mirror interior (No mirror w/ss ext) <input type="checkbox"/> No end panel (for same case to case connections)
END PANEL RIGHT	<input type="checkbox"/> Cutaway with glass	<input type="checkbox"/> Full end panel w/mirror interior (No mirror w/ss ext) <input type="checkbox"/> No end panel (for same case to case connections)
FRONT GLASS	<input type="checkbox"/> Curved single pane, lift-up front glass w/o lock	<input type="checkbox"/> Flat angled single pane, lift-up front glass w/o lock
UPPER REAR	<input type="checkbox"/> Clear glass rear sliding doors w/o lock	<input type="checkbox"/> Reflective glass rear sliding doors w/o lock
MISCELLANEOUS		<input type="checkbox"/> Front glass lock <input type="checkbox"/> Rear door lock <input type="checkbox"/> Scale stand w/receptacle (requires separate circuit) <input type="checkbox"/> Second year parts & labor warranty
ACCESSORIES		<input type="checkbox"/> Power cord (n/a w/scale stand) <input type="checkbox"/> Rear wrapping board


Product Specifications

Intended Environment: Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
Zone	Integrated Prod Temp ° F
All	160

PLAN VIEW

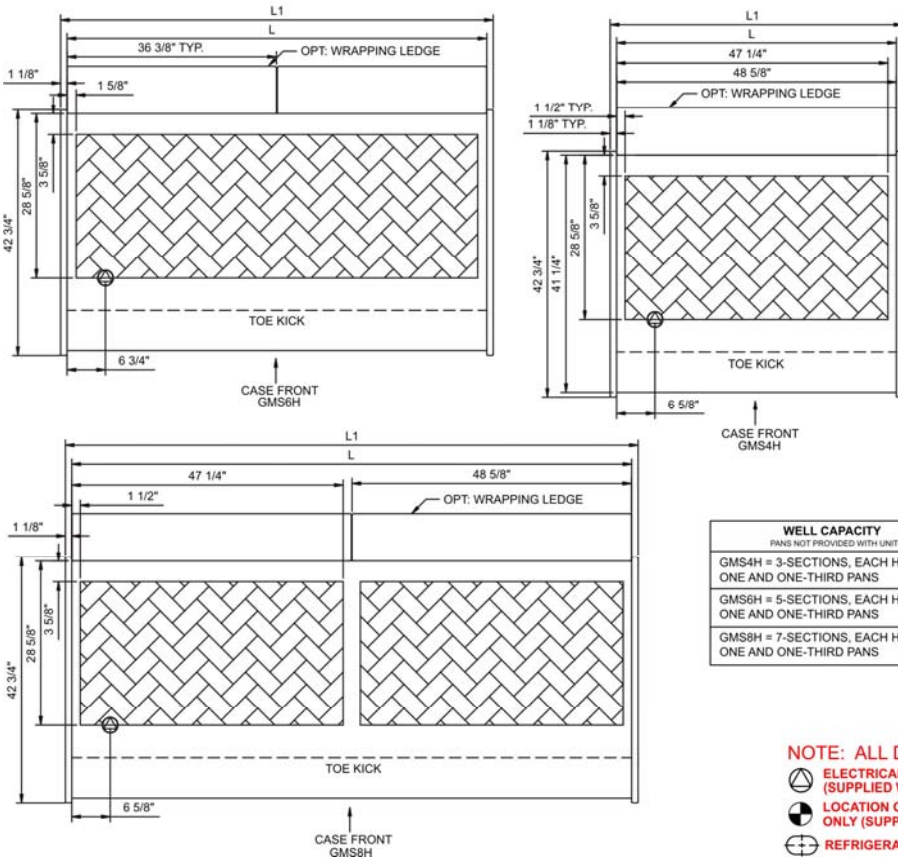

SIDE VIEW

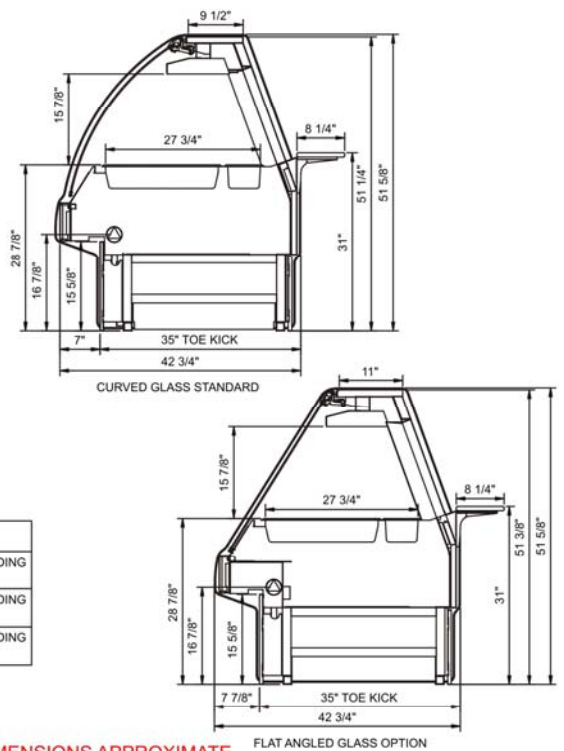

WELL CAPACITY	
PANS NOT PROVIDED WITH UNIT	
GMS4H	= 3-SECTIONS, EACH HOLDING ONE AND ONE-THIRD PANS
GMS6H	= 5-SECTIONS, EACH HOLDING ONE AND ONE-THIRD PANS
GMS8H	= 7-SECTIONS, EACH HOLDING ONE AND ONE-THIRD PANS

- NOTE: ALL DIMENSIONS APPROXIMATE**
- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
 - REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
 - LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 1/2" OR 1 1/2" PVC TUBE).
 - REFRIGERATION LINE CONNECTION.
 - SELF-CONTAINED CASE SERVICE ACCESS AREA.
 - DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications

Model	L"	L1"	L2"	System	Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls	
GMS4H	48.75	51.00	.00	Heat	Circuit #1	208	1	50-60	11.83	2,531	2+G	Leads Single	N/A	N/A	770	110
						240	1	50-60	13.60	3,329	2+G	Leads Single	N/A	N/A		
						208	3	50-60	7.97	2,531	3+G	Leads Single	N/A	N/A		
						240	3	50-60	9.15	3,329	3+G	Leads Single	N/A	N/A		
GMS6H	73.13	75.38	.00	Heat	Circuit #1	208	1	50-60	19.67	4,198	2+G	Leads Single	N/A	N/A	900	110
						240	1	50-60	22.62	5,529	2+G	Leads Single	N/A	N/A		
						208	3	50-60	15.44	4,198	3+G	Leads Single	N/A	N/A		
						240	3	50-60	17.80	5,529	3+G	Leads Single	N/A	N/A		
GMS8H	97.50	99.75	.00	Heat	Circuit #1	208	1	50-60	27.52	5,865	2+G	Leads Single	N/A	N/A	1,100	110
						240	1	50-60	31.65	7,729	2+G	Leads Single	N/A	N/A		
						208	3	50-60	19.80	5,865	3+G	Leads Single	N/A	N/A		
						240	3	50-60	22.75	7,729	3+G	Leads Single	N/A	N/A		

*** Does not include electric defrost on freezer models.

Regulatory Approvals:	
All Models	ETL Listed to UL 197 ETL Listed to CAN/CSA 22.2 No. 109 UL Sanitation to NSF Std 4

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 43" minimum door entry clearance required (without shipping skid).



In Accordance with
AHRI Std 1200

DOE 2012
Energy Efficiency
Compliant