

## Product Specifications

### Combination Prep/Refrigerated Self-Service Case w/ Rear Storage



MODEL SHOWN: GP441RR

NOTE: INTERIOR PANS NOT PROVIDED W/CASE GP441RR HOLDS (2) FULL SIZE 4"D PANS  
 GP641RR = (3) PANS - GP841RR = (4) PANS

- |                                  |                            |
|----------------------------------|----------------------------|
| <input type="checkbox"/> GP441RR | 51"L x 53-3/4"D x 43"H     |
| <input type="checkbox"/> GP641RR | 75-3/8"L x 51-3/4"D x 43"H |
| <input type="checkbox"/> GP841RR | 99-3/4"L x 51-3/4"D x 43"H |
- Lengths include end panels

### STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Condiment pan support rails
- Integrated average product temperature of 40°F or less
- NOTE: Pans not supplied with case.
- NOTE: Remote only available w/rail base w/shims. N/A w/levelers, casters or legs.
- One year parts & labor; 5 year compressor warranty
- Shelving removable and adjustable on 1" centers
- Stainless steel rear exterior
- T-8 top light



Features	Standard	Options
<b>SNEEZE GUARD POSTS</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Silver
<b>EXTERIOR COLOR</b>	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel
<b>INTERIOR COLOR</b>	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel <input type="checkbox"/> White
<b>BASE</b>	<input type="checkbox"/> Casters w/ levelers (n/a w/ remote ref.)	<input type="checkbox"/> 6"H legs
<b>END PANEL LEFT</b>	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> No end panel (for same case to case connections)
<b>END PANEL RIGHT</b>	<input type="checkbox"/> Full end panel w/mirror interior	<input type="checkbox"/> No end panel (for same case to case connections)
<b>LOWER FRONT PANEL</b>	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel
<b>REAR STORAGE</b>	<input type="checkbox"/> Non-refrigerated rear storage (w/o doors)	<input type="checkbox"/> Non-refrigerated rear storage (w/doors) <input type="checkbox"/> Refrigerated rear storage (w/doors)
<b>REAR WORK LEDGE</b>	<input type="checkbox"/> White Sanalite®	<input type="checkbox"/> Stainless steel
<b>SNEEZE GUARD</b>	<input type="checkbox"/> Clear glass with top serving shelf	<input type="checkbox"/> No sneeze guard (to be supplied by others in the field)
<b>ELECTRICAL CONNECT</b>	<input type="checkbox"/> 6' straight blade power cord (self cont.)	<input type="checkbox"/> 6' locking power cord (self cont.) <input type="checkbox"/> Electrical leads (remote)
<b>REFRIGERATION</b>	<input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration	<input type="checkbox"/> NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs. <input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV
<b>MISCELLANEOUS</b>		<input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
<b>ACCESSORIES</b>		<input type="checkbox"/> Additional non-lighted metal shelf <input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Removable wire security cover, locking

## Product Specifications

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
<b>Zone</b>	<b>Integrated Prod Temp ° F</b>
All	40

**PLAN VIEW**

**SIDE VIEW**

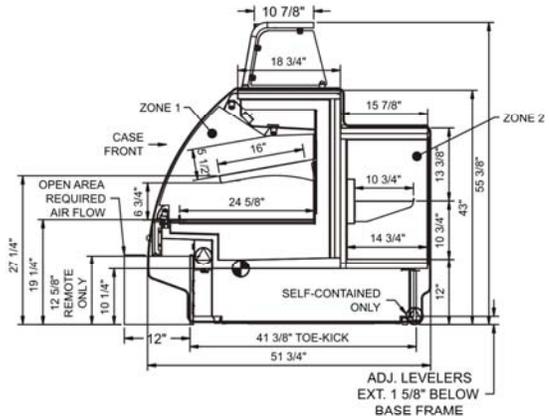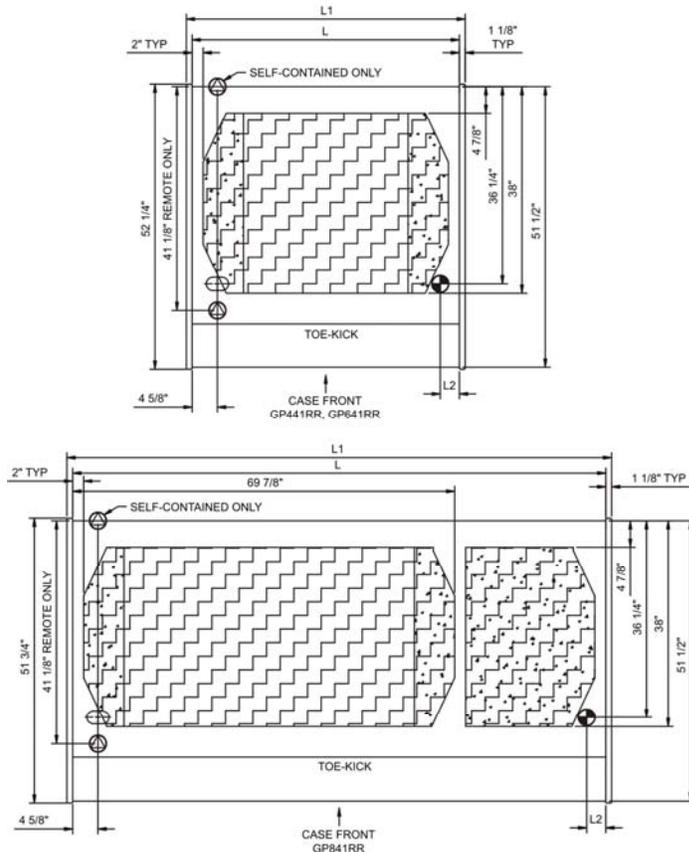

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 2\"/>
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

**Model Technical Specifications**

Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls	
GP441RR	N/A	51.00	3.50	Remote(Type I)	Circuit #1	110-120	1	60	3.24	258	2+G	Leads Multiple	20	5,250	980	110
				Self-Contained	Circuit #1	110/230V	1	60	11.10	2,195	3+G	14-20P or L14-20P	N/A	N/A		
GP641RR	N/A	75.38	3.50	Remote(Type I)	Circuit #1	110-120	1	60	6.32	542	2+G	Leads Multiple	20	6,350	1,350	110
				Self-Contained	Circuit #1	110/230V	1	60	15.50	2,655	3+G	14-20P or L14-20P	N/A	N/A		
GP841RR	N/A	99.75	3.50	Remote(Type I)	Circuit #1	110-120	1	60	5.85	655	2+G	Leads Multiple	20	8,900	1,900	110
				Self-Contained	Circuit #1	110/230V	1	60	14.80	3,176	3+G	14-20P or L14-20P	N/A	N/A		

\*\*\* Does not include electric defrost on freezer models.

**Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 52" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

**Regulatory Approvals:**

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7
------------	--

