Product Specifications

> **Combination Refrigerated Service Beside Non-Refrigerated Service Case**



ITEM NO: PROJECT:

DATE:

	ī
Lengths include end panels	
2"D x 51-1/4"H	

	Longulo mola
H5C4850LR	50"L x 42"D x 51-1/4"H
H5C4850RR	50"L x 42"D x 51-1/4"H
H5C5650LR	58"L x 42"D x 51-1/4"H
H5C5650RR	58"L x 42"D x 51-1/4"H
H5C7450LR	76"L x 42"D x 51-1/4"H
H5C7450RR	76"L x 42"D x 51-1/4"H


STANDARD FEATURES

- Breeze[™] w/EnergyWise s/c refrigeration
- Clear glass shelves, lighted (T-8)
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refrig. only)
- Curved single pane, lift-up front glass w/o lock
- Integrated average product temperature of 40°F or less
- LR = Refrigerated display customer left, RR = Refrigerated display customer right
- One year parts & labor; 5 year compressor warranty
- Shelving removable and adjustable on 1" centers
- T-8 top & shelf lights

Features	Standard	Options					
EXTERIOR COLOR	Laminated (non-premium) Confirm	Laminated (premium) Confirm pattern/grain					
	pattern/grain direction	direction					
		 Stainless steel (includes rear of case) 					
INTERIOR COLOR	Black	Stainless steel					
		White					
REAR EXTERIOR COLOR	Painted - White	Painted - Black					
		 Stainless steel (w/stainless exterior only) 					
TRIM COLOR	Black	□ Silver					
BASE	Levelers	□ 6"H legs					
		 Casters (n/a with remote) 					
END PANEL LEFT	Full end panel w/mirror interior	Cutaway with glass					
		No end panel (for same case to case					
		connections)					
END PANEL RIGHT	Full end panel w/mirror interior	Cutaway with glass					
		No end panel (for same case to case					
		connections)					
UPPER REAR	Clear glass rear sliding doors w/o lock	Reflective glass rear sliding doors w/o lock					
ELECTRICAL CONNECT	6' straight blade power cord (self cont.)	6' locking power cord (self cont.)					
		 Electrical leads (remote) 					
REFRIGERATION	□ Breeze™ w/EnergyWise s/c refrigeration	Note: Remote doesn't incl Conds unit. Floor					
		drain reqd.					
		Remote w/thermostat, solenoid & TXV					
MISCELLANEOUS		Front glass lock					
		□ LED lights					
		Rear door lock					
		Second year parts & labor warranty (excludes)					
		compressor)					



Product Specifications

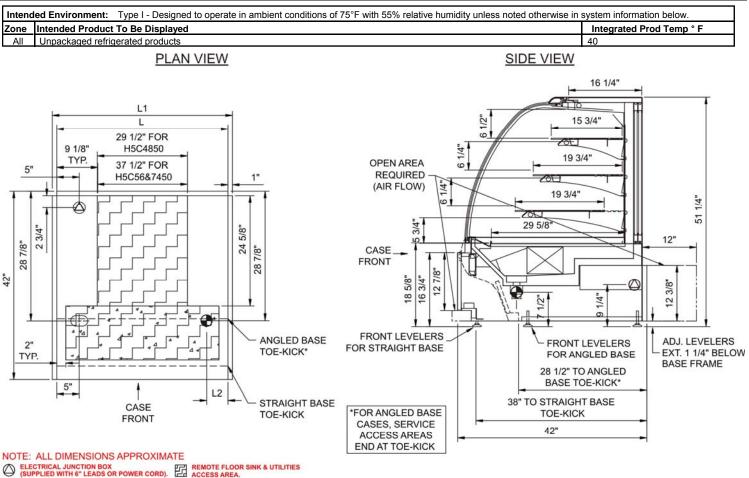

SELF-CONTAINED CASE SERVICE ACCESS AREA

ONLY (SUPPLIED WITH " OR 112" PVC TUBE). REFRIGERATION LINE CONNECTION.

 \mathbb{R} DRY CASE SERVICE ACCESS AREA

Model Technical Specifications																
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps	Watts	Wires	NEMA Plug	SST	втин	Ship Wt	Frt Cls	
H5C4850LR	N/A	50.00	13.00	Remote(Type I)	Circuit #1	110-120	1	60	2.62	207	2+G	Leads Multiple	20.0	1,412	950	110
				Self-Contained	Circuit #1	110-120	1	60	10.70	763	2+G	5-15P or L5-15P	N/A	N/A		
H5C4850RR	N/A	50.00	13.00	Remote(Type I)	Circuit #1	110-120	1	60	2.62	207	2+G	Leads Multiple	20.0	1,412	950	110
				Self-Contained	Circuit #1	110-120	1	60	10.70	763	2+G	5-15P or L5-15P	N/A	N/A		
H5C5650LR	N/A	58.00	13.00	Remote(Type I)	Circuit #1	110-120	1	60	2.69	231	2+G	Leads Multiple	20.0	1,655	1,030	110
				Self-Contained	Circuit #1	110-120	1	60	10.70	787	2+G	5-15P or L5-15P	N/A	N/A		
H5C5650RR	N/A	58.00	13.00	Remote(Type I)	Circuit #1	110-120	1	60	2.69	231	2+G	Leads Multiple	20.0	1,655	1,030	110
				Self-Contained	Circuit #1	110-120	1	60	10.70	787	2+G	5-15P or L5-15P	N/A	N/A		
H5C7450LR	N/A	76.00	13.00	Remote(Type I)	Circuit #1	110-120	1	60	2.27	235	2+G	Leads Multiple	20.0	2,069	1,220	110
				Self-Contained	Circuit #1	110-120	1	60	10.30	791	2+G	5-15P or L5-15P	N/A	N/A		
H5C7450RR	N/A	76.00	13.00	Remote(Type I)	Circuit #1	110-120	1	60	2.27	235	2+G	Leads Multiple	20.0	2,069	1,220	110
				Self-Contained	Circuit #1	110-120	1	60	10.30	791	2+G	5-15P or L5-15P	N/A	N/A		

*** Does not include electric defrost on freezer models.

Regulatory Approvals: All Models Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7 **DOE 2012 (II)** (II) AHRI CERTIFIED® Energy Efficiency Compliant

Important Notes:

1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle 2) 43" Minimum door entry clearance required (without shipping skid).

3) Compressor air intake from rear and out front panel at toe kick. Toe kick cannot be blocked.

4) Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4".



Note: Information is subject to change at any time.