

## Product Specifications

### Refrigerated Self-Service Low Profile Case

Lengths include end panels

- HMO3936R 38-3/4"L x 34-1/8"D x 37-3/4"H
- HMO5136R 50-3/4"L x 34-1/8"D x 37-3/4"H
- HMO7536R 75-1/8"L x 34-1/8"D x 37-3/4"H



MODELS SHOWN: HMO5136R

### STANDARD FEATURES


- Breeze™ w/EnergyWise s/c refrigeration
- Clear glass shelf, lighted (T-8)
- Compressor air rear intake, front discharge. Toe kick cannot be blocked
- Condensate pan (self-contained refrig. only)
- Flat front panel
- Full end panel w/mirror interior
- Integrated average product temperature of 40°F or less
- Open reach-in front
- T-8 top & shelf lights
- Upper & lower rear areas white

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes rear of case)
INTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel <input type="checkbox"/> White
REAR EXTERIOR COLOR	<input type="checkbox"/> Painted - White	<input type="checkbox"/> Painted - Black <input type="checkbox"/> Stainless steel (w/stainless ext. only)
TRIM COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Silver
BASE	<input type="checkbox"/> Levelers	<input type="checkbox"/> 6"H legs <input type="checkbox"/> Casters (n/a with remote)
UPPER REAR	<input type="checkbox"/> Solid back panel	<input type="checkbox"/> Clear glass rear sliding doors w/o lock
ELECTRICAL CONNECT	<input type="checkbox"/> 6' straight blade power cord (self cont.)	<input type="checkbox"/> 6' locking power cord (self cont.) <input type="checkbox"/> Electrical leads (remote)
REFRIGERATION	<input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration	<input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		<input type="checkbox"/> LED lights <input type="checkbox"/> Rear door lock <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)
ACCESSORIES		<input type="checkbox"/> 2"H Display steps <input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Removable wire security cover, locking


## Product Specifications

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
<b>Zone</b>	<b>Integrated Prod Temp ° F</b>
All	40

**PLAN VIEW**

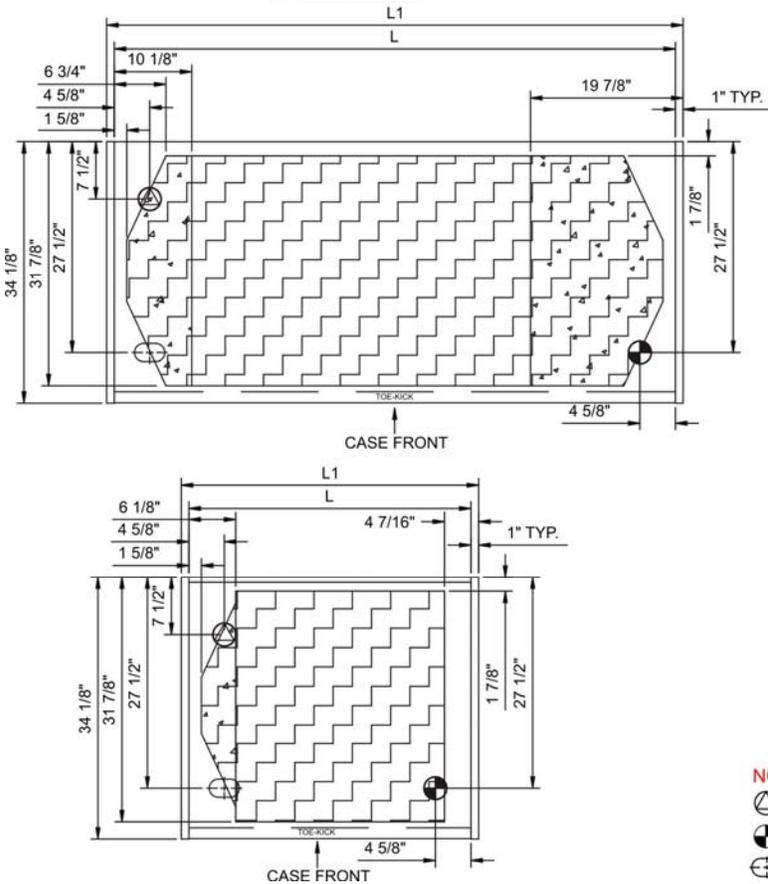

**SIDE VIEW**

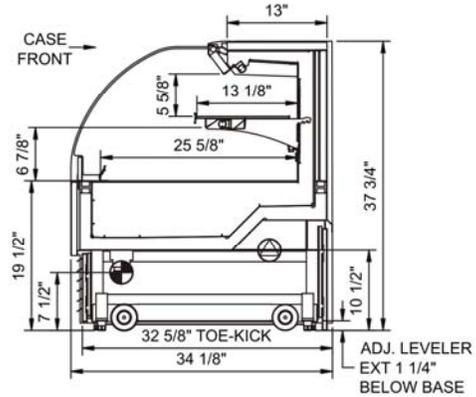

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

**Model Technical Specifications**

Model	L"	L1"	L2"	System Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls		
HMO3936R	N/A	38.75	4.63	Remote (Type I)	Circuit #1	110-120	1	60	1.27	109	2+G	Leads Multiple	24	2,945	700	110
				Self-Contained	Circuit #1	110-120	1	60	14.10	1,326	2+G	5-20P or L5-20P	N/A	N/A		
HMO5136R	N/A	50.75	4.63	Remote (Type I)	Circuit #1	110-120	1	60	1.49	135	2+G	Leads Multiple	20	3,000	800	110
				Self-Contained	Circuit #1	110-120	1	60	15.80	1,476	2+G	5-20P or L5-20P	N/A	N/A		
HMO7536R	N/A	75.13	4.63	Remote (Type I)	Circuit #1	110-120	1	60	2.22	210	2+G	Leads Multiple	20	4,600	900	110
				Self-Contained	Circuit #1	208-240	1	60	10.60	2,040	2+G	6-20P	N/A	N/A		

\*\*\* Does not include electric defrost on freezer models.

**Important Notes:**

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle

**Regulatory Approvals:**

All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7
------------	--

