

**Product Specifications**

**Combination Convertible Service Above Refrigerated Self-Service Case**

Lengths include end panels

- HOU3852R-QS 40"L x 42"D x 53"H
- HOU4852R-QS 50"L x 42"D x 53"H
- HOU5652R-QS 58"L x 42"D x 53"H
- HOU7452R-QS 76"L x 42"D x 53"H



MODEL SHOWN: HOU4852R-QS


**STANDARD FEATURES**

- Breeze™ w/EnergyWise s/c refrigeration
- 3' models do not include center divider in upper display
- Clear glass shelf, lighted (T-8) in upper display
- Condensate pan (self-contained refrig. only)
- Convertible baffle in upper display
- Curved double pane, lift-up front glass w/o lock
- Flat front panel
- Full end panel w/mirror interior
- Integrated average product temperature of 40°F or less
- Lower refrigerated self-service display deck
- One year parts & labor; 5 year compressor warranty
- Shelving removable and adjustable on 1" centers
- T-8 top & shelf lights

Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	
INTERIOR COLOR	<input type="checkbox"/> Black	
REAR EXTERIOR COLOR	<input type="checkbox"/> Painted - White	
TRIM COLOR	<input type="checkbox"/> Black	
BASE	<input type="checkbox"/> Levelers	
UPPER REAR	<input type="checkbox"/> Clear glass rear sliding doors w/o lock	
ELECTRICAL CONNECT	<input type="checkbox"/> 6' straight blade power cord (self cont.)	
REFRIGERATION	<input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration	

## Product Specifications

<b>Intended Environment:</b> Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.	
<b>Zone</b>	<b>Intended Product To Be Displayed</b>
All	Packaged / unpackaged refrigerated products
<b>Integrated Prod Temp ° F</b>	
40	

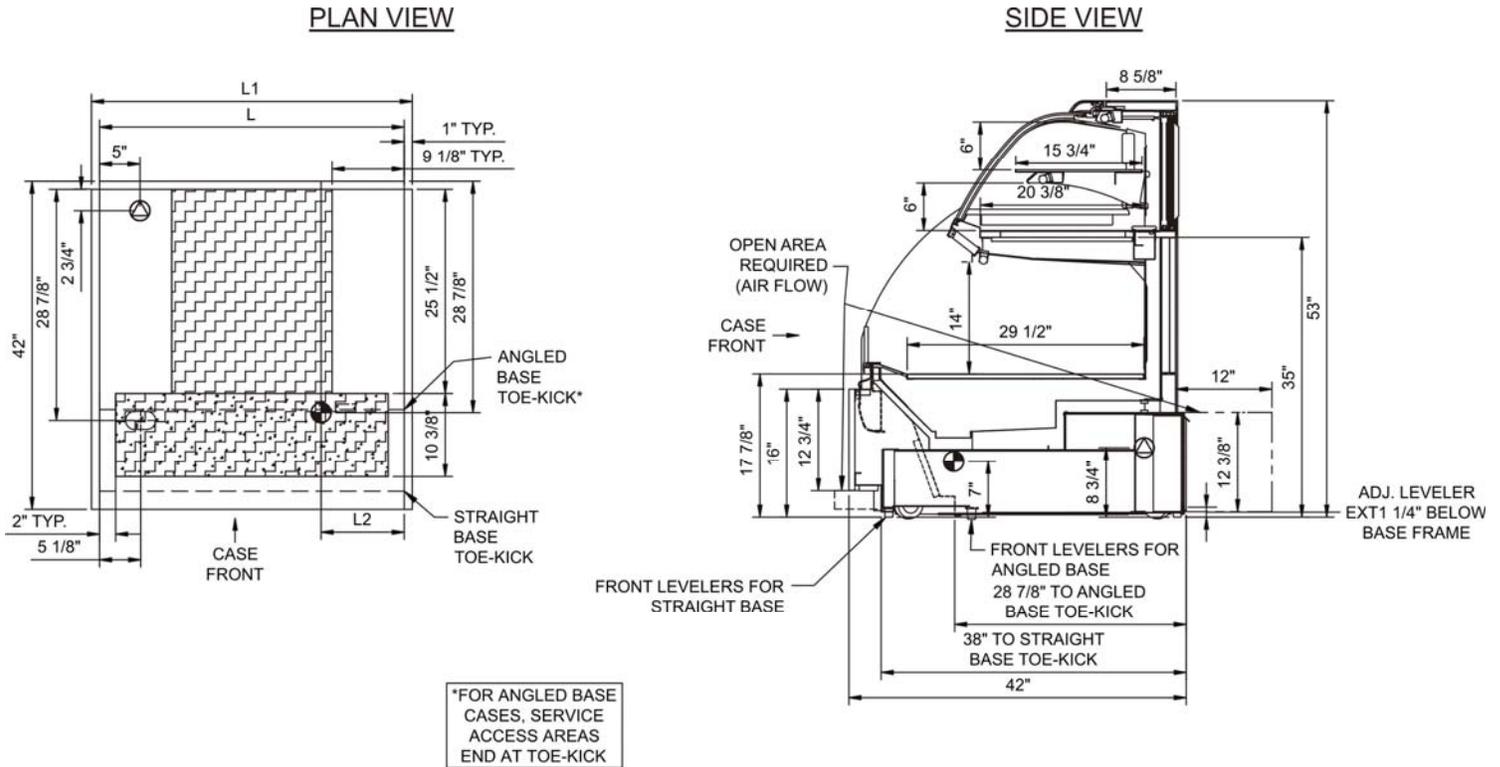

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.

- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

### Model Technical Specifications

Model	L"	L1"	L2"	System	Circuit Volts	Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	Frt Cls
HOU3852R-QS	N/A	40.00	4.75	Self-Contained	Circuit #1	110-120	1	60	12.00	1,306	2+G	N/A	N/A	950	110
HOU4852R-QS	N/A	50.00	4.75	Self-Contained	Circuit #1	110-120	1	60	16.00	1,519	2+G	N/A	N/A	1,050	110
HOU5652R-QS	N/A	58.00	5.75	Self-Contained	Circuit #1	110/230V	1	60	11.20	1,763	3+G	N/A	N/A	1,100	110
HOU7452R-QS	N/A	76.00	5.75	Self-Contained	Circuit #1	110/230V	1	60	12.00	2,134	3+G	N/A	N/A	1,220	110

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF 7

### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) 43" Minimum door entry clearance required (without shipping skid).
- 3) Compressor air intake from rear and out front panel at toe kick. Toe kick cannot be blocked.
- 4) Units are supplied with levelers. They must be adjusted during installation to ensure that unit is level and plumb. Dimensions reflect levelers extended 1 1/4".

