

TRUE FOOD SERVICE EQUIPMENT, INC.

2001 East Terra Lane • O'Fallon, Missouri 63366 (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name: _____

Location: _____

Model #:

Item #:	 Qty:	:
	2	

SIS #

AIA #

Model: TFM-29AL **Horizontal Freezer:** Glass Angled Lid



TFM-29AL

- True's horizontal freezers are uniquely designed to promote high-profit frozen novelties in high impulse retail traffic areas. Ideal for bolstering incremental sales of frozen merchandise and seasonal specialties.
- Cold wall, environmentally friendly (134A) refrigeration system. Maintains -10°F (-23.33°C), ideal for both ice cream and frozen food.
- Exterior non-peel or chip white laminated vinyl, durable and permanent; with gray mitered plastic top and lid frames.
- Interior NSF approved, white aluminum with 300 series stainless steel floor.
- Tempered, hard coated, "Low-E" glass slide lids. Reduces solar heat gain, enhances energy efficiency and minimizes condensation.
- Locks standard, provide security, prevents theft.
- Convenient defrost drain.
- 2¹/₂" (64 mm) diameter stem castors.
- Entire cabinet structure is foamed-inplace using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest ¹/₈" (millimeters rounded up to next whole number).

		Cabinet Dimensions (inches) (mm)						NEMA	Cord Length (total ft.)	Crated Weight (lbs.)
Model	Lids	L	D	H*	HP	Voltage	Amps	Config.	(total m)	(kg)
TFM-29AL	2	29%	26¾	34	1⁄5	115/60/1	2.6	5-15P	9	150
		759	670	864					2.74	69

* Height does not include 31/4" (83 mm) for castors and 5/8" (16 mm) for lid handle.

	APPROVALS:	AVAILABLE AT:
6/10 Printed	in U.S.A.	

Model:

TFM-29AL

Horizontal Freezer: Glass Angled Lid



STANDARD FEATURES

DESIGN

 True's horizontal freezers are uniquely designed to promote high-profit frozen novelties in high impulse retail traffic areas. Ideal for bolstering incremental sales increases of frozen merchandise and seasonal specialties.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly (CFC free) 134A refrigerant.
- Cold wall refrigeration system. Maintains -10°F (23.3°C) cabinet temperature, ideal for both ice cream and frozen food.
- Condensing unit is accessed from behind grill on right side; slides out for easy maintenance.
- Manual defrost system; convenient drain located on front of cabinet.

CABINET CONSTRUCTION

- Exterior- non-peel or chip white laminated vinyl, durable and permanent; with gray mitered plastic top and lid frames.
- Interior- attractive, NSF approved, white aluminum liner; non-rust, peel or chip. 300 series stainless steel floor.

- Insulation entire cabinet structure is foamed-in-place using Ecomate. A high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- 2¹/₂" (64mm) diameter stem castors. LIDS
- Angled tempered, hard coated "low-E", single pane glass slide lid assemblies. The latest in energy efficient technology; reduces solar heat gain and minimizes condensation.
- Designed for convenient access, fast service and attractive display.
- Lid lock standard.

MODEL FEATURES

- Self-contained, portable system. No plumbing required.
- Low profile design permits easier placement, saves aisle space.
- Interior mounted thermometer.
- NSF-7 compliant for open food product.

ELECTRICAL


 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.



OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply. Black vinyl exterior.

- Heavy duty novelty baskets (accommodates 2).
- Dividers for novelty baskets.

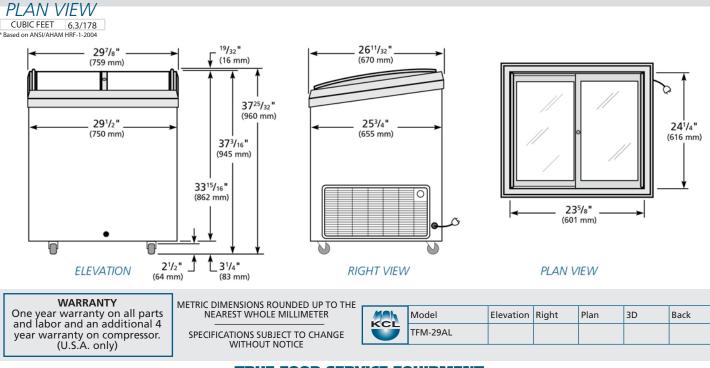

TRUE FOOD SERVICE EQUIPMENT

2001 East Terra Lane • O'Fallon, Missouri 63366 • (636)240-2400 • Fax (636)272-2408 • (800)325-6152 • Intl. Fax# (001)636-272-7546 • www.truemfg.com