



ADA Compliant

This Space for Architect/Engineer Approval



Job Name _____ Date _____

Model Specified _____ Quantity _____

Customer/Wholesaler _____

Contractor _____

Architect/Engineer _____

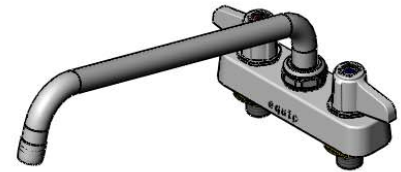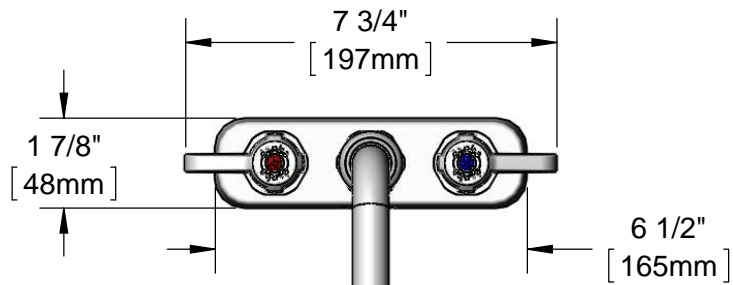

5SP-12
equip 12" Swing Nozzle
w/ Laminar Flow Device.
Rigid Conversion Requires
014200-45 Lock Washer
(Sold Separately)

Ceramic Cartridges &
equip Lever Handles w/
Color Coded Screws

1 1/16"
[27mm]

1 1/8"
[29mm]

4"
[102mm]

12 1/8"
[308mm]

4 1/16"
[103mm]

6 1/2"
[165mm]

Mounting Surface

1/4"
[6mm]
Maximum
Thickness
1/2" NPT
Male Inlets

Rough-in Requirement:
(2) Ø 1" [25mm] Mounting Holes

Model Number 5F-4CLX12	Date 06/05/12	Scale 1:4	Drawn DHL	Checked DMH	Approved JHB
----------------------------------	-------------------------	---------------------	---------------------	-----------------------	------------------------




Product Specifications:

**4" Deck Mount Workboard Mixing Faucet w/ Ceramic Cartridges,
equip Lever Handles, equip 12" Swing Nozzle
& 1/2" NPT Male Inlets**

equip Foodservice Accessories
2 Saddleback Cove, P.O. Box 1088
Travelers Rest, South Carolina 29690
Phone: 800.891.4808 Fax: 800.868.0084

ITEM NO.	SALES NO.	DESCRIPTION
1	5SP-12	equip 12" Swing Nozzle
2	014250-45	Laminar Flow Device
3	013839-25	equip Swivel Nut
4	013848-45	equip Swivel Piece O-ring
5	5-HDL-L	equip Lever Handle w/ Color Coded Screws
6	013788-45	equip Ceramic Cartridge, LTC
7	000999-45	Brass Lock Washer
8	002954-45	Shank Lock Nut
9	017587-45	Swivel Nut Seal
10	013787-45	equip Ceramic Cartridge, RTC

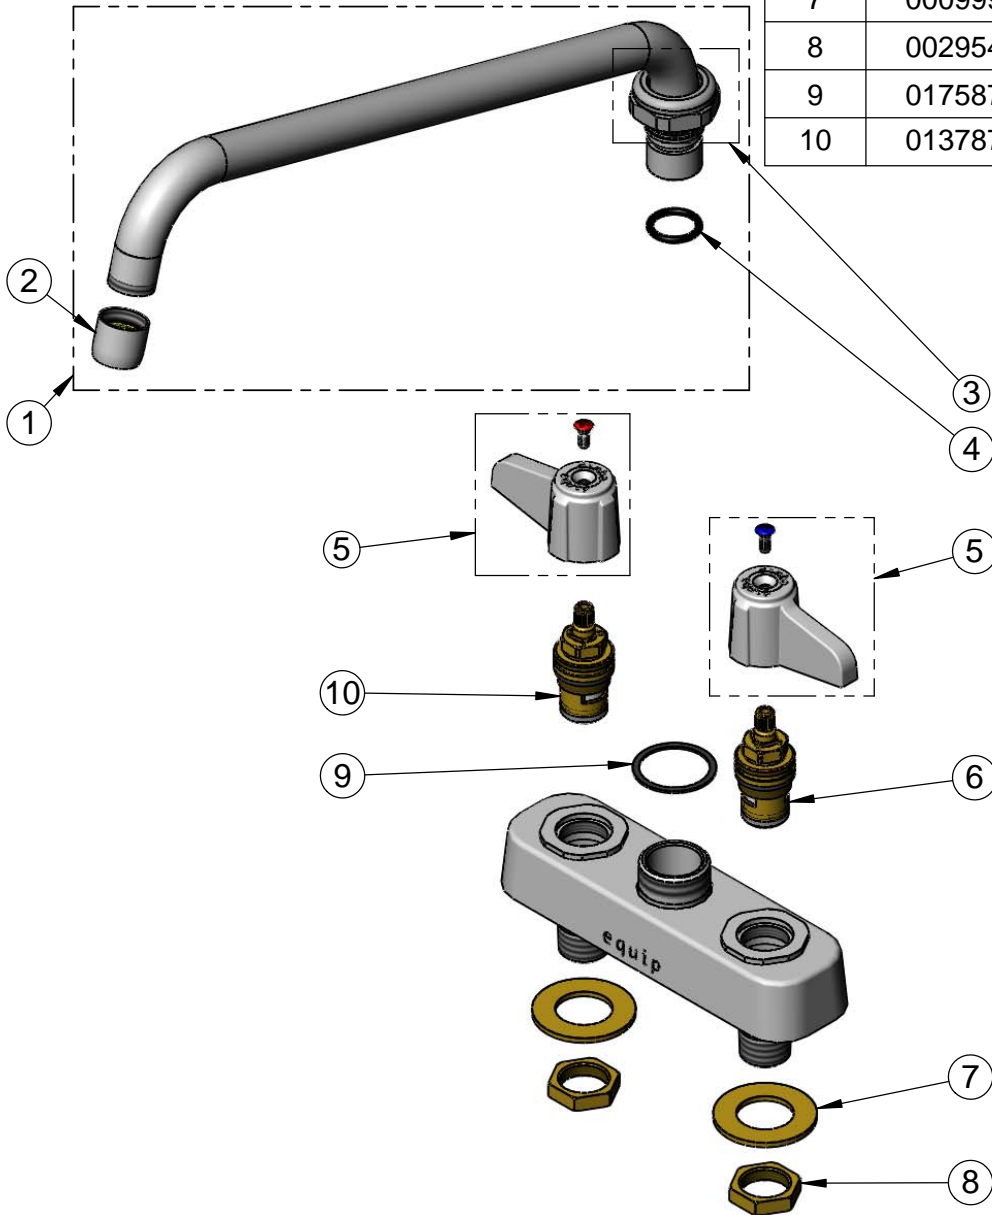

Model Number 5F-4CLX12	Date 06/05/12	Scale NTS	Drawn DHL	Checked DMH	Approved JHB
---------------------------	------------------	--------------	--------------	----------------	-----------------



Product Specifications:
**4" Deck Mount Workboard Mixing Faucet w/ Ceramic Cartridges,
 equip Lever Handles, equip 12" Swing Nozzle
 & 1/2" NPT Male Inlets**

equip Foodservice Accessories
 2 Saddleback Cove, P.O. Box 1088
 Travelers Rest, South Carolina 29690
 Phone: 800.891.4808 Fax: 800.868.0084