Tes

T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3132

Item No.


ASME A112.18.1 / CSA B125.1

NSF 61 - Section 9 NSF 372 (Low Lead Content)

ANSI A117.1 (ADA)

UL 1951

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

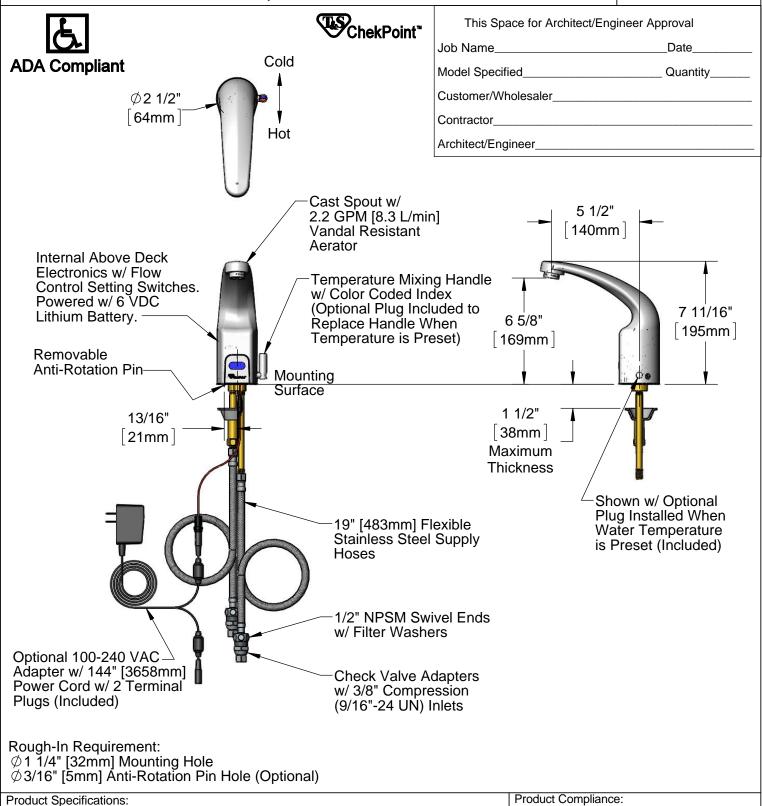

Drawn: DMH Checked: GEF Approved: JHB Date: 04/22/14 Scale: 1:6 Sheet: 1 of 2

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole

Deck Mount, Cast Spout w/ 2.2 GPM VR Aerator, Point-of-Use

Stainless Steel Flexible Supply Lines & 3/8" Compression Inlets

Temperature Control, Battery or AC Adapter Powered,




T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690 Model No.

EC-3132

Item No.

Travelers Rest, SC: 800-476-4103 • Simi Valley, CA: 800-423-0150 • Fax: 864-834-3518 • www.tsbrass.com

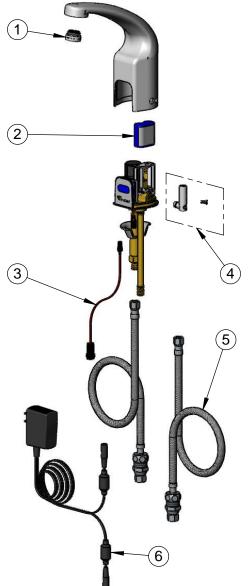

| ITEM NO. | SALES NO. | DESCRIPTION |
|-------------|-----------|-------------------------------------|
| 1 | 016355-45 | VR 2.2 GPM Aerator w/ Key |
| 2 | 019087-45 | 6VDC Lithium Battery, CR-P2 |
| 3 | 019088-45 | Auxiliary Power Connector Cable |
| 4 | 019082-45 | Lever Asm & Body Screw Kit w/ L-Key |
| 5 | 018544-45 | SS Flex Hose w/ Check Valve Adapter |
| 6 | 5EF-0002 | A/C Transformer |
| 7 | 019086-45 | Body Plug, Pre-Set Temperature |
| | | |



A maximum of (8) ChekPoint faucets can be powered by EC-HARDWIRE ChekPoint Hardwire AC Transformer when connected using EC-ADEWIRE cables. (Both sold separately)



Optional Plug Replaces

Lever Handle When

Pre-setting Temperature (Installs from Inside of Body)

015425-45



015425-45 VR Aerator Key 018543-45 Torx T-20 VR L-Key

Flow Control Switches are Located Behind the Sensor. Remove Battery to Access Switches.

- * Switches are set to DEFAULT position:
- Auto Time Out = 15 seconds
- Shut Off Delay = 1 second
- Auto Flush = ÓFF
- * Available Water Flow Control Selections:
 - Auto Time Out: 15 sec, 30 sec, 45 sec, 60 sec, 3 min, 20 min
 - Shut Off Delay: 1 sec, 10 sec, 15 sec, 30 sec
 - Auto Flush (30 Seconds After Every 12 Inactive Hours): ON or OFF

Product Specifications:

Chrome Plated Brass Above Deck Electronics Faucet, Single Hole Deck Mount, Cast Spout w/ 2.2 GPM VR Aerator, Point-of-Use Temperature Control, Battery or AC Adapter Powered, Stainless Steel Flexible Supply Lines & 3/8" Compression Inlets

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951

Drawn: DMH Checked: GEF Approved: JHB Date: 04/22/14 Scale: NTS Sheet: 2 of 2