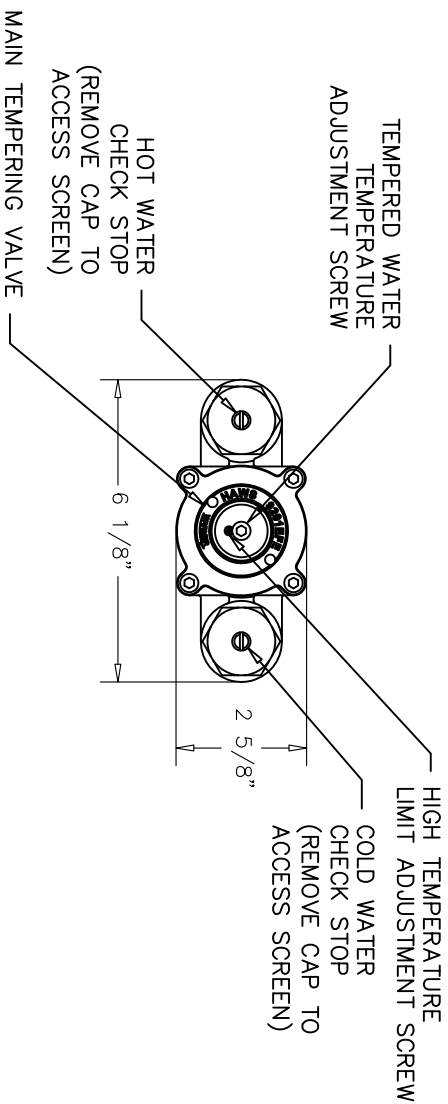
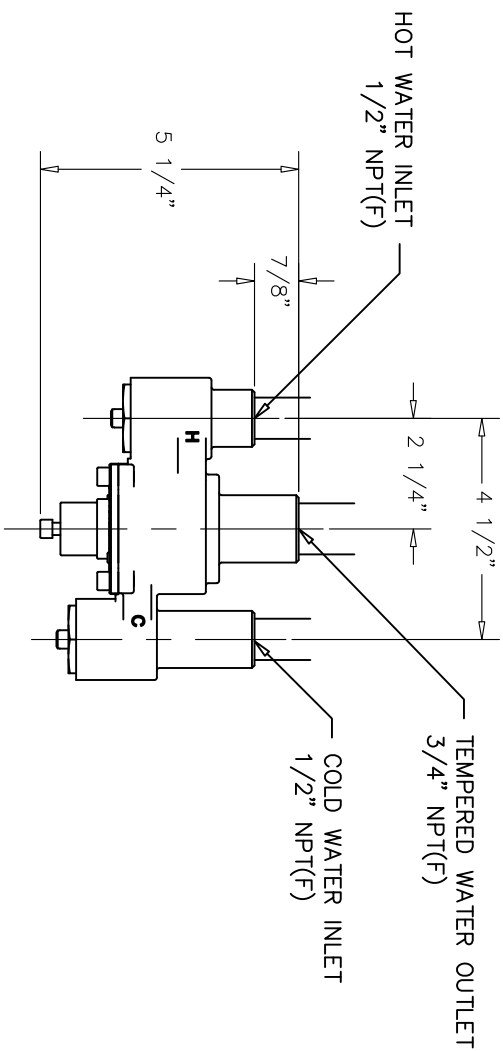


1. HAWS CORPORATION MODEL 9201EFE: THERMOSTATIC MIXING VALVE WITH 1 TO 12 GPM FLOW RANGE
2. EACH VALVE TO COME INDIVIDUALLY BOXED WITH OPERATION AND MAINTENANCE MANUAL AND APPROPRIATE INSERTS AS REQUIRED.
3. FACTORY OUTLET FLOW SET AT 85° F.
4. INLETS 1/2" NPT, OUTLET 3/4" NPT.
5. ASSE 1071 & CSA B125.3 CERTIFIED

[illegible]