

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, convenient, beautiful

1250 Victoria St  
 Carson, CA 90746  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

# Soild Dual Temperature Reach-In Top Mounts J Series - Dual Temp

## FEATURES / BENEFITS

**Model : JRF-45**

- **DIGITAL TEMPERATURE CONTROL SYSTEM**  
 Provides precise and constant temperature. This level of precision allows food products to remain fresh over an extended period of time.
- **HIGH-TECH MONITOR**  
 The monitor digitally displays present cabinet temperatures. You can easily change the temperature by adjusting the thermostat.
- **HOT GAS CONDENSATE SYSTEM**  
 Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.
- **EFFICIENT REFRIGERATION SYSTEM**  
 Turbo Air's solid door reach-in's are designed with oversized and balanced refrigeration systems. CFC Free R-134A utilized for refrigerator and freezer. These include efficient evaporators and condensers for faster cooling and greater efficiency.
- **AUTOMATIC EVAPORATOR FAN MOTOR DELAYS**  
 Through stopping the evaporator fan when the refrigerator door opens, the circulation of hot, moist air into the refrigerator is prevented. This increases energy efficiency and lengthens the life of the compressor.
- **ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE) COATED WIRE SHELVES**
- **EXTERIOR & INTERIOR OF CABINET CONSTRUCTION**  
 Stainless steel exterior (galvanized steel top, bottom and back) and stainless steel interior with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury.
- **HIGH-DENSITY POLYURETHANE INSULATION**  
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- **ERGONOMICALLY DESIGNED DOORS**  
 Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.
- **MAGNETIC DOOR GASKETS**  
 Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.
- **TWO SEPARATE REFRIGERATION SYSTEM**  
 J series dual temp model is designed with two separate compressors for refrigerator & freezer. It uses 35% for freezer and 65% for refrigerator from entire cabinet volume creating perfect solution for business with limited space. For two section model, freezer is built on the left section and refrigerator on the right.



**REFRIGERATOR HOLDS 33°F ~ 38°F,  
 AND FREEZER HOLDS -10°F ~ 0°F.**




Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D x H † (inches)
<b>JRF-45</b>	<b>2</b>	<b>16.4(F)/22.8(R)</b>	<b>6</b>	<b>1/3(F) 1/4(R)</b>	<b>7</b>	<b>364</b>	<b>49 5/8 x 31 1/2 x 72</b>

# Sold Dual Temperature

Reach-In Top Mounts  
J Series - Dual Temp

## Model : JRF-45

ELECTRICAL DATA		JRF-45
Voltage		115/60/1
Plug Type		 NEMA-5-15P
Full Load Amperes		7
Compressor HP		1/3(F) 1/4(R)
Feed Wires with Ground		3
Cord Length ft.		9
Refrigerant		R-134A
DIMENSIONAL DATA		
# of Doors		2
Net Capacity cu. ft.		16.4(F)/22.8(R)
Ext. Length Overall in.		49 5/8 (1260mm)
Ext. Depth Overall in.*		31 1/2 (800mm)
Ext. Height Overall in.†		72 (1829mm)
Int. Demension (LxDxH) (F)		18 1/8 x 25 5/8 x 56
Int. Demension (LxDxH) (R)		25 1/4 x 25 5/8 x 56
Gross Weight lbs.		364
Net Weight lbs.		331
# of Shelves		6
Self Size		17 x 24 (F) / 24 x 24 (R)

Design and specifications subject to change without notice.  
Actual shipping weight may differ due to extra packing materials for product protection.  
\* Depth does not include 1-3/8" for rear condensate enclosure.  
† Height does not include 5" for caster height.

■ **WARRANTY : Exceptional 2 Year Parts and Labor Warranty  
Additional 3 Year Warranty on Compressor**


- INCANDESCENT INTERIOR LIGHTING
- DOOR LOCKS
- SELF-CONTAINED SYSTEM
- 4" SWIVEL CASTERS
- SOLID AND STURDY GRILLE DESIGN

■ **OPTIONAL ACCESSORIES :**


- 2.5" Diameter casters
- 5" Diameter casters
- 6" ABS plastic legs
- Additional PE coated wire shelves

## PLAN VIEW


(unit : inch)



FRONT VIEW

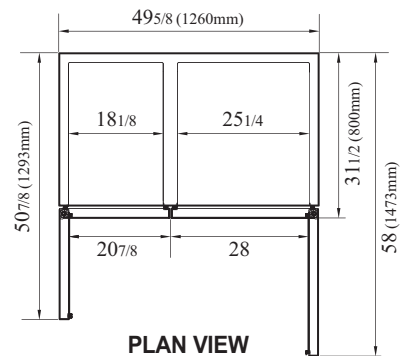

PLAN VIEW

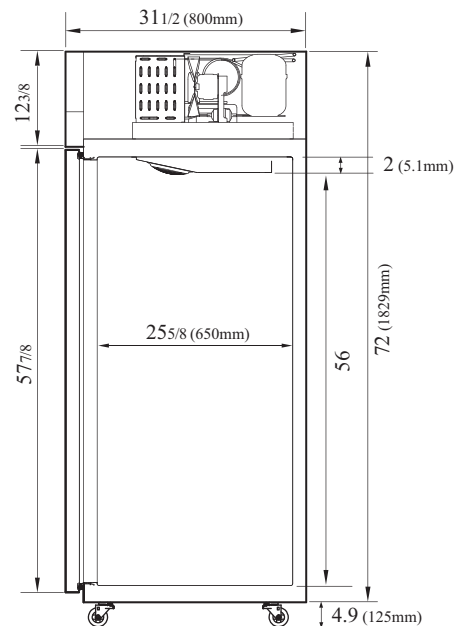

SIDE VIEW

Ver.201301



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002

REFRIGERATOR MANUFACTURER  
**Turbo air**

GERMAN  
**KNIFE**

**RADIANCE**

GREEN WORLD

AIR CONDITIONER MANUFACTURER  
**Turbo air**