

TURBO REFRIGERATOR MANUFACTURER
air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Sakura Sushi Case

*Display Cases
 Refrigerated Sushi Cases*

ITS INNOVATIVE DESIGN AND NEW TECHNOLOGY WILL POSITION TURBO AIR AS
 THE LEADER IN SUSHI CASE PRODUCTS FOR MANY YEARS TO COME

**Model : SAKURA-50-L
 SAKURA-50-R**



SAKURA-50-R

FEATURES / BENEFITS

- BEAUTIFULLY CURVED, ANGLED DOWN TOP FRONT GLASS
- EQUIPPED NSF APPROVED THERMOMETER
- 1" DIAMETER DRAIN HOLE WITH PLASTIC COVER
- SLIGHTLY TILTED BOTTOM FOR BETTER DRAINAGE
- LARGER INTERIOR FOR OPTIMIZED DISPLAY EFFECT
- 304 STAINLESS STEEL SOLID FOOD PLATES
- OVERSIZED AND BALANCED CFC FREE R-134A REFRIGERATION SYSTEM
- TEMPERED GLASS DOORS WITH DURABLE PLASTIC DOOR HANDLES AT CHEF SIDE
- EXTERIOR BODY IS BEAUTIFULLY MADE FROM UNIQUE AND STYLISH 304 STAINLESS STEEL MATERIAL
- SIDE MOUNT COMPRESSOR MAKES IT EASY TO BE SERVICED WITHOUT BEING MOVED
- ELEGANT CONTEMPORARY EURO DESIGN ENHANCES ANY STORE APPLICATION
- EASY CLEANING AND EXCELLENT DURABILITY
- REFRIGERATOR MAINTAINS 35°F ~ 41°F FOR THE BEST IN FOOD PRESERVATION
- AMBIENT TEMPERATURE RANGE 50°F ~ 80°F, SATURATION TEMPERATURE 39°F
- CONDENSER LOCATES ON LEFT OR RIGHT FROM THE FRONT VIEW
- DRAIN HOLE LOCATES ON LEFT FROM THE CHEF SIDE.
- RECOMMENDED OPERATING CONDITIONS
 SAKURA models are designed to operate in environments where temperature & humidity do not exceed 75°F and 55% relative humidity.



Model	Compressor Location	Sliding Door	CU./FT.	Bottom Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H (inches)
SAKURA-50-L SAKURA-50-R	Left Right	2	1.3	3	1/6	3	88	48 1/4 x 14 1/8 x 11 1/2

Sakura Sushi Case

Display Cases
Refrigerated Sushi Cases

Model : SAKURA-50-L SAKURA-50-R

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	Ⓜ NEMA-5-15P
Full Load Amperes	3
Compressor HP	1/6
Cord Length ft.	9
Refrigerant	R-134A
DIMENSIONAL DATA	
Net Capacity cu. ft.	1.3
Ext. Length Overall in.	48 1/4 (1226mm)
Ext. Depth Overall in.*	14 1/8 (360mm)
Ext. Height Overall in.	11 1/2 (292mm)
Int. Length Overall in.	33 1/4 (845mm)
Int. Depth Overall in.	12 (305mm)
Int. Height Overall in.	6 1/2 (165mm)
# of Sliding Doors	2
# of Bottom Shelves	3
Gross Weight lbs.	86
Net Weight lbs.	76

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


* Depth does not include 5/8" for drain.

- **WARRANTY :** 1 Year Parts and Labor Warranty
Additional 4 Year Warranty on Compressor


- **SELF-CONTAINED SYSTEM**
- **NO PLUMBING REQUIRED**
- **SIMPLE PLUG-IN INSTALLATION**

PLAN VIEW

(unit : inch)

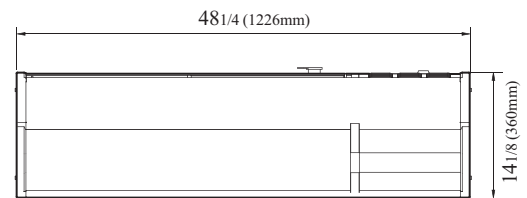


SAKURA-50-R

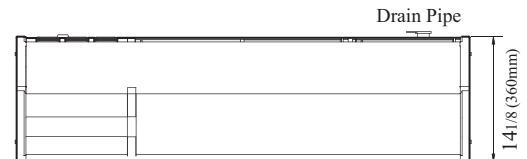


SAKURA-50-L

TOP VIEW

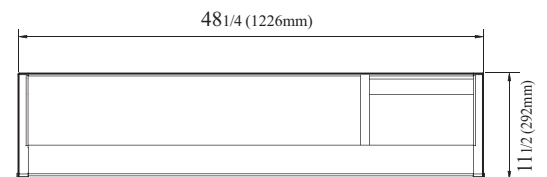


SAKURA-50-R



SAKURA-50-L

FRONT VIEW



SIDE VIEW

Ver.201407



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002

REFRIGERATOR MANUFACTURER
Turbo air

GERMAN KNIFE

RADIANCE

GREEN WORLD

AIR CONDITIONER MANUFACTURER
Turbo air