

REFRIGERATOR MANUFACTURER
Turbo air
 more durable, efficient, beautiful

4184 E. Conant St.
 Long Beach, CA 90808
 Tel. 310-900-1000
 Fax. 310-900-1077
www.turboairinc.com

Project :

Model # :

Item # :

Qty :

Available W/H :

Approval :

Milk Coolers - Dual Sided Door

*Milk Coolers
 Super Deluxe Series*

**3 YEAR PARTS & LABOR
 WARRANTY**

**Model : TMKC-58D-WA
 TMKC-58D-WS
 TMKC-58D-SA
 TMKC-58D-SS**



FEATURES & BENEFITS

■ Efficient refrigeration system

Turbo Air's milk coolers are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. It also includes efficient evaporators and condensers for faster cooling and greater efficiency, which result in saving ownership costs. Forced-air refrigeration system keep milk cold after a prolonged period of time, allowing it to be fresh and cold.

■ Exterior digital thermometer standard for easy visibility

Exterior digital temperature display allows easy reading, precise, and constant temperature. This level of precision allows milk to remain fresh and safe over an extended period of time.

■ Sturdy and clean, durable cabinet construction

Exterior is stainless steel or white coated steel with stainless steel door. Interior is comprised of stainless steel.

■ High-density polyurethane insulation

The entire cabinet construction is foamed-in-place using high density, environmental friendly CFC free polyurethane insulation.

■ Convenient bottom floor drain standard with hose adapter

Floor drain is located in the rear on the right hand side for easy clean out. The hose adapter allows for convenient connecting to drain hose.

■ Door lock standard for added safety

■ Heavy duty floor racks standard

■ Door support bumpers standard

■ Stainless steel self-service doors have drop front feature and hold-open flip-up top lid

■ 4" dia. swivel casters standard for easy movement, two with brakes to lock the unit in place

■ Self-contained system

■ Corner bumpers available as optional

■ Dual sided for convenient access

Dual sided model offers convenient and efficient access to refrigerated products from both sides of the unit. Dual access milk cooler provides easy stocking and maximum serving possibility.

■ Refrigerator holds 33°F ~ 38°F for the best in milk preservation



Model	# of Doors	# of Floor Rack	CU./FT.	Crate Capacity (13 x 13 x 11)	HP	AMPS	Crated Weight (lbs.)	L x D x H [†] (inches)
TMKC-58D-**	4	3	24.5	16	1/2	7.0	376~403	58 x 32 7/8 x 41 5/8

Model : TMKC-58D-**

SPECIFICATIONS	
Voltage	115/60/1
Plug Type	Ⓜ NEMA 5-15P
Full Load Amperes	7.0
Compressor HP	1/2
Cord Length (ft.)	9
Refrigerant	R-134A
Net Capacity (cu. ft.)	24.5
Ext. Length (in.)	58 (1475mm)
Ext. Depth (in.) *	32 7/8 (836mm)
Ext. Height (in.) †	41 5/8 (1056mm)
# of Doors	4
Gross Weight (lbs.)	376~403
Crate Capacity (13"x13"x11")	16

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 1-1/8" (30mm) for bumpers.

† Height does not include 5" (127mm) for caster height.

- **WARRANTY : 3 Year Parts and Labor Warranty**
Additional 2 Year Warranty on Compressor

** Product number

Model	Gross Weight (lbs.)	EXTERIOR	INTERIOR
TMKC-58D-WA	383	White Vinyl & Stainless Steel	Aluminum
TMKC-58D-WS	403	White Vinyl & Stainless Steel	Stainless Steel
TMKC-58D-SA	376	Stainless Steel	Aluminum
TMKC-58D-SS	396	Stainless Steel	Stainless Steel


- **Door lock standard**
- **Heavy duty floor racks standard**
- **Door support bumpers standard**
- **Self-contained system**

OPTIONAL ACCESSORIES :


- ☐ Corner bumpers available

PLAN VIEW

(unit : inch)

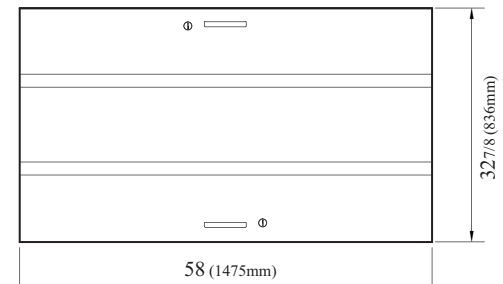

PLAN VIEW

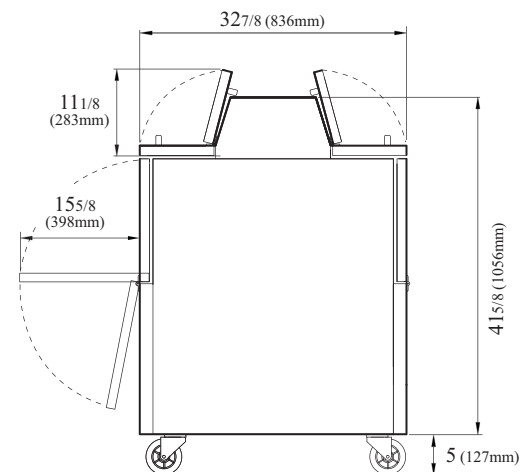

SIDE VIEW

Ver.201510



- Turbo Air : 800-627-0032 ■ GK : 800-500-3519
- Warranty : 800-381-7770 ■ AC : 888-900-1002