


Project	Item Number	Quantity
SFG600 SERIES		<h2 style="text-align: center;">SFG600 SERIES REVERSIBLE DOUGH SHEETER</h2>
REVERSIBLE DOUGH SHEETER	<p>Features</p> <ul style="list-style-type: none"> • Floor model reversible dough sheeter. • Hand and foot pedal operation. • 0 to 1.9" (48mm) adjustable cylinder separation changes dough thickness. • Hard chrome polished cylinders. • Tables fold upright for storage and movement. • Powerful 1HP motor. • Sheets dough onto rolling pins to allow for transport of rolled dough to work area. • Interlock switches protect operator from injury if safety guard is opened. • Pivoting and removable arms. • Convenient storage in base for rolling pins • Cord and plug. 	<p>Models:</p> <ul style="list-style-type: none"> SFG 600 TM SFG 600 TMM SFG 600 TL WITH CUTTER ROLLER AND ADJUSTABLE SPEED
Univex Corporation	<p>WARRANTY DETAILS The SFG600 Sheeters carry a one-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins on the date of purchase and, provided the unit is used in accordance with our instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential compensatory, incidental, or special damages. Contact the Univex service department for any warranty claims.</p>	<div style="display: flex; justify-content: space-around; align-items: center;">   </div> <p>Standard Accessories</p> <ul style="list-style-type: none"> • Heavy duty hardwood rolling pins. • Designated area for flour while operating machine. <p>Optional Accessories Contact factory for cutting roller attachments. On the SFG600TL model only.</p> <p>Warranty</p> <ul style="list-style-type: none"> • One-year, on-site parts & labor warranty

REVERSIBLE DOUGH SHEETER

SFG600

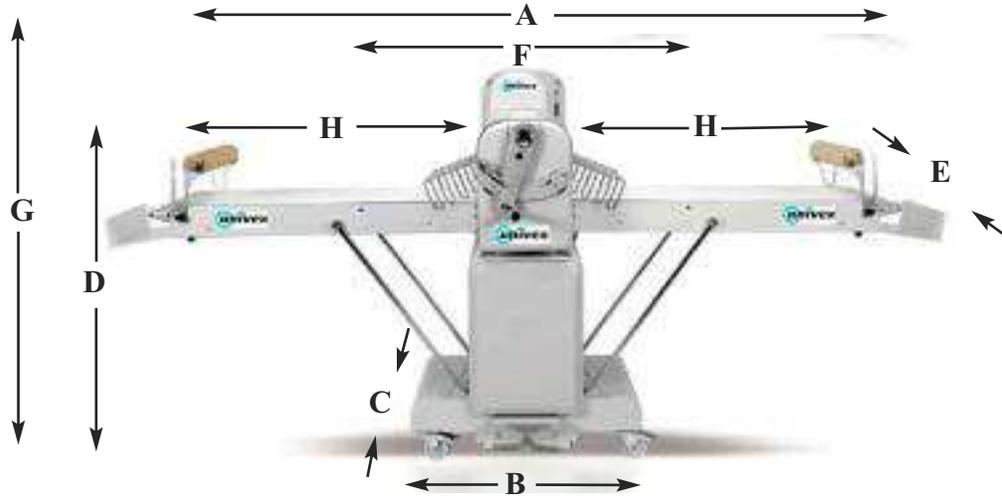

Shipping Information:

Freight Class: 85

	SFG600 TM	SFG600TMM	SFG600 TL
Net Weight:	511.5lb.(232Kg)	573.2lb.(260Kg)	661.4lb.(300Kg)
Shipping Weight:	621.7lb.(282Kg)	683.4lb.(310Kg)	771.6lb.(350Kg)

Shipping Crate Dimensions:

	SFG600 TM	SFG600TMM	SFG600 TL
Height:	61.5" (1560mm)	72.8" (1850mm)	72.8" (1850mm)
Width:	56.0" (1420mm)	56.0" (1420mm)	56.0" (1420mm)
Depth:	36.6" (930mm)	36.6" (930mm)	36.6" (930mm)
Cubic measure:	73ft ³ (2.06M ³)	86ft ³ (2.44M ³)	86ft ³ (2.44M ³)

Dimensions:

	SFG600 TM	SFG600 TMM	SFG600 TL
A) Overall length:	117.7" (2990mm)	151.2" (3840mm)	134.5" (3415mm)
B) Base length:	29.5" (750mm)	29.5" (750mm)	29.5" (750mm)
C) Machine width:	41.5" (1055mm)	41.5" (1055mm)	41.5" (1055mm)
D) Overall height:	50.0" (1270mm)	50.0" (1270mm)	50.0" (1270mm)
E) Belt width:	23.6" (600mm)	23.6" (600mm)	23.6" (600mm)
F) Length folded:	43.3" (1100mm)	*	*
G) Height folded:	75.6" (1920mm)	*	*
H) Table length (2 X)	46.5" (1180mm)	63.0" (1600mm)	1 X 46.5" (1180mm) 1 X 63.0" (1600mm)

* Due to length of tables, for safety reasons sheeter cannot be stored in folded position.

Motor: 1 hp. Capacitor start

Drive: Chain drive.

Electrical:

220V,60HZ,3PH,2A
Contact factory for additional voltages and certifications

Controls: Stop and start push buttons.

Manually adjustable space between rolling cylinders adjusts in increments from 0" to 1.9" (0 to 48mm). Hand and foot pedals for shifting conveyor direction.