

Project Item Number Quantity

SL80RB / SL120RB

SILVERLINE SPIRAL MIXERS WITH REMOVABLE BOWL

Univex Corporation | `



Features

- · Removable bowl with dolley.
- Stainless steel bowl, spiral dough hook, and shaft
- · Seperate bowl and agitator motors.
- Two speeds with bowl reverse.
- Control panel with seperate timers for low speed and high speed timed settings.
- Bowl jog.
- Mixer mounted on wheels for easy moving.

SL80RB / SL120RB

SILVERLINE Spiral Mixers With Removable Bowl

Models:

SL80RB. 137 Quart (130 liter) Mixer SL120RB. 180 Quart (170 liter) Mixer





Standard Accessories

- · Stainless Steel Bowl.
- Dolley with bowl for SL80RB.
- Dolley with bowl for SL120RB.
- Electromagnetic hook for bowl.

Optional Accessories

Extra dolley with bowl for SL80RB. Extra dolley with bowl for SL120RB. SV 190 bowl lifter. Discharge height-71" (1800mm).

Warranty

One-year, on-site parts & labor warranty

WARRANTY DETAILS


The Silverline mixers carry a one-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins on the date of purchase and, provided the unit is used in accordance with our instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential compensatory, incidental, or special damages. Contact the Univex service department for any warranty claims.





Silverline Spiral Mixers With Removable bowl

SL80RB / SL120RB

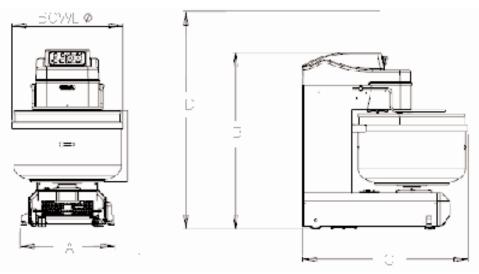

Dimensions:
A) Overall width:
B) Overall height:

C) Overall length:D) Height with head tipped:Bowl diameter:

Shipping Information: Freight Class: 85

Net Weight: Shipping Weight: Shipping Box Dimensions: Height:

Width: Depth:

Cubic measure:

Dough Capacity: SL80RB:

SL80RB: 176 lb (80 kg) SL120RB: 265 lb (120 kg)

Electrical:

220V, 60HZ, 3 PH

Contact factory for other voltages and certifications.

Controls: Control panel with digital timers. Seperate timers for high and low speed. Security key for manual use. Bowl reverse direction switch.

Bowl Guard: Swing open for full access to bowl. Guard must be closed for mixer to operate.

SL80RB

28.3" (720mm) 53.1" (1350mm) 56.3" (1430mm) 66.9" (1700mm) 26.4" (670mm)

1410 lb. (640Kg) 1521 lb. (690Kg)

78.7" (2000mm) 41.3" (1050mm) 72.8" (1850mm) 137ft³ (3.9M³)

Motors:

Spiral: SL80R

SL80RB: 11 HP, 38.5 AMPS, 8 KW SL120RB: 11 HP, 38.5 AMPS, 8 KW

Bowl:

SL80RB: 1 HP, 3.6 AMPS, .75 KW SL120RB: 1 HP, 3.6 AMPS, .75 KW

Speeds:

1st. 100 rpm. 2nd. 200 rpm.

Bowl: Stainless steel. SPEED: 15 rpm.

SL120RB

30.9" (785mm) 53.1" (1350mm) 59.1" (1500mm) 66.9" (1700mm) 29.9" (760mm)

1433 lb (650kg) 1543 lb (700kg)

78.7" (2000mm) 41.3" (1050mm) 72.8" (1850mm) 137ft³ (3.9M³)

Choose manual or automatic operation. Digital timers can be set for both speeds. Automatic shifting into second speed frees operator. Electrical interlocks prevent accidental mixer operation.

The powerful belt drive provides low vibration low noise performance and economical maintenance for years of reliable service.

The SL series mixers are equipped with leveling feet for easy positioning and set-up.

Printed in the USA

02/10

