

VICTORY

110 Woodcrest Road, Cherry Hill, NJ 08003-3648
 856.428.4200 • 800.523.5008 • Fax: 856.428.7299
 www.victoryrefrigeration.com • email: sales@victoryrefrigeration.com



PROJECT: _____
 LOCATION: _____
 ITEM #: _____
 QUANTITY: _____

ULTRASPEC™ SERIES

STANDARD FEATURES

- V-TEMP™ Electronic Control System
- High Performance, Balanced, Top-Mounted Refrigeration
- Environmentally Safe R-134a Refrigerant
- Energy Efficient, Dual-Speed EC Evaporator Fan Motor(s)
- Plasticized Evaporator Fin Coils
- Non-Electric Condensate Evaporator
- Foamed-in-Place Polyurethane Insulation
- Heavy Duty Cylinder Locks (Solid Doors Only)
- Self-Closing Doors with 120° Hold Open Feature
- Cam-Lift Hinges, Guaranteed for Life (Solid Doors)
- Ergonomically Correct Door Handles, Guaranteed for Life
- S, SA Series have 6" High, Adjustable Stainless Steel Legs
- A Series has 6" High Standard Black Legs
- Sliding Glass Doors are Self-Closing
- Hinged Front Shroud Makes Condenser Cleaning Easier
- Light Button On Control Activates Interior Lighting
- Fluorescent Lighting
- Tempered Glass Doors are Low E, Double Pane, Argon Filled
- Snap-In Magnetic Gasket(s) (Solid Doors Only)
- Anti-Condensate Door Perimeter Heaters
- Stainless Steel Interior Door Liner on Solid Doors
- Energy Saving Thermal Breaker Caps, Guaranteed for Life
- Three (3) Epoxy Coated Wire Shelves per Cabinet Section
- Cord and Plug (see electrical data for details)

OPTIONS AND ACCESSORIES

- Remote Models
- Stainless Steel Case Back and Shroud (Reach-Ins)
- LED Lighting
- Stainless Steel Shelves
- 6" Overall Height Casters (Set of 4)
- Exterior Laminate Décor
- Adjustable Tray and Pan Slides
- Optional Voltages
- **FLEXTEMP** Performance Mode
- USB Data Recorder
- RS-485 Serial Interface
- Two (2) Year Service Warranty



NOTE: Not all marks refer to all models

**1 Year Parts and Labor Warranty • 5 Year Compressor Warranty
 2 Year V-TEMP™ Control Warranty**

DISPLAY REFRIGERATORS HALF-DOOR



V-TEMP CONTROL™




DRS-2D-S1-HD

MODELS

	REACH-IN	PASS-THRU
 S SERIES Stainless Steel Exterior and Interior	DRS-2D-S1-HD	DRS-2D-S1-PT-HD
 SA SERIES Stainless Steel Exterior and Aluminum Interior	DRSA-2D-S1-HD	DRSA-2D-S1-PT-HD
 A SERIES Stainless Steel Front and Doors, Aluminum Ends and Interior	DRA-2D-S1-HD	

Victory Refrigeration specification sheets are available online at www.victoryrefrigeration.com

APPROVALS:

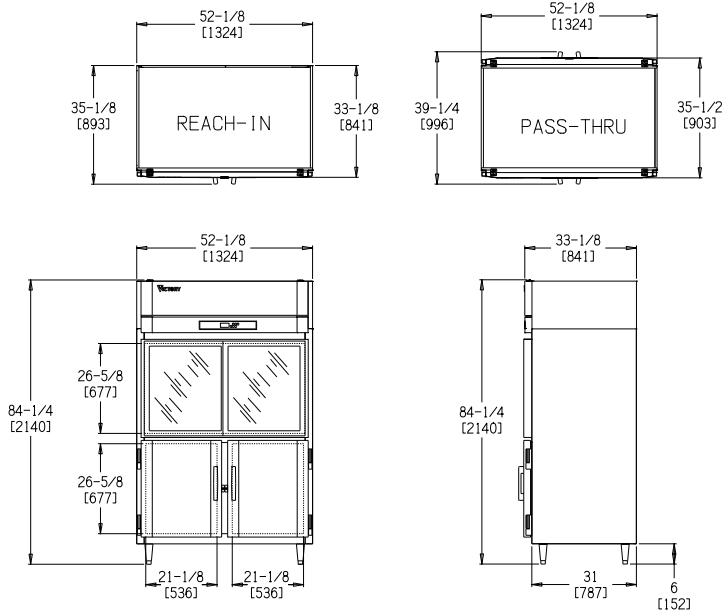

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CABINET CONSTRUCTION

The cabinet front and doors are constructed of heavy gauge, polished stainless steel to maintain an attractive appearance after years of heavy use. Polyurethane foam insulation throughout ensures the ultimate in energy efficiency. The front shroud lifts up for easy access when cleaning the condenser unit.

DOOR CONSTRUCTION

The solid doors are heavy gauge, polished stainless steel with a stainless steel interior liner. Each door is provided with a cylinder lock and ergonomically correct vertical handle. The door hinges are self-closing and have a hold-open feature at 120° which facilitates product loading. Humidity control wires around the door jamb prevent condensation from forming on the front of the cabinet in high humidity environments. The wires are concealed by a high impact, non-conducting thermal breaker cap.

The self-closing, sliding glass doors are double pane, tempered glass with a Low E factor. The doors have a "hold-open" device to facilitate product loading.

REFRIGERATION SYSTEM

All components of the high efficiency, air-cooled, self-contained refrigeration system are mounted on top of the cabinet out of the food storage zone providing greater usable storage space. Environmentally friendly R-134a refrigerant is efficiently metered by a capillary system providing a constant, safe operating temperature and quick "recovery" under the most demanding conditions. The hermetically sealed systems are designed to operate at 38°F. Each cooling coil has plasticized fins to resist food acids and dual-speed EC fan motor(s) for greater cooling capacity and efficiency. All condensate water is disposed of automatically by the energy efficient, non-electric condensate evaporator.

INTERIOR STORAGE ARRANGEMENTS

Each cabinet section is provided with three heavy-duty, epoxy coated wire shelves. The shelves are adjustable in one inch increments. Solid doors have a wide door opening for use with a variety of optional pan slide configurations including 18" x 26" and 14" x 18" pans.

Note: 12" x 20" pans do not fit through the sliding glass doors.

V-TEMP™ CONTROL SYSTEM

The easy to use V-TEMP™ Control is provided standard with a two year parts and labor warranty. This durable, water resistant microprocessor monitors and controls the entire temperature maintenance process. It includes an ON/OFF switch, manual defrost, interior light switch, LED temperature indicator in °C or °F, a HI/LO audio/visual temperature alarm, power supply interruption, door ajar and "clean condenser" alarms. A manager's "lock-out" feature is provided to safeguard pre-determined control settings. A HAACP Event Indicator/Memory feature announces and records up to nine (9) alarm events. Unique to the V-TEMP™ are two standard modes of operation:

- ▶ **SUPERCOOL** - Provides a lower "set-point" refrigeration condition for a set period of time when food has just been loaded into the refrigerator and needs to be quickly brought back down to a safe temperature.
- ▶ **ENERGY SAVER** - The cabinet automatically reverts to the energy saving mode when there are no door openings for four hours.

A **FLEXTEMP** mode of operation is available as an option. **FLEXTEMP** provides the ability to select a unique temperature from 28°F to 40°F. This optional feature is ideal for seasonal menu changes and items with specific temperature requirements for dairy, meat, fish or poultry.

CHARACTERISTICS	2 SECTION	2 SECTION
	Reach-In	Pass-Thru
DIMENSIONAL DATA		
Capacity Net (cubic ft.)	46.5	46.5
Width, Overall (in.)	52 1/8	52 1/8
Depth, Overall (inc. handles)	35 1/8	39 1/4
Depth, Door(s) Open 90° (in.)	56 3/4	82 1/2
Solid Door Width (in.)	21 1/8	21 1/8
Clear Half-Door Height (in.)	25 3/8	25 3/8
Clear Sliding Door Width	19 1/2	19 1/2
Height Overall (inc. 6" legs)	84 1/4	84 1/4
No. Full/Half Doors	4H	8H
No. of Shelves	6	6
Shelf Area (square ft.)	33.2	33.2
ELECTRICAL DATA		
Cabinet Voltage	115/60/1	115/60/1
Feed Wires	2	3
Condensing Unit Voltage	115/60/1	208-230/60/1
NEMA Plug	5-20P	NO
Total Amperes	11.3	10
REFRIGERATION DATA		
Condensing Unit Size	1/2 HP	3/4 HP
Refrigerant	R-134a	R-134a

NOTE: Plug style, voltage and full load amps may vary depending on certain options selected such as optional voltages and compressor upgrades.

REMOTE APPLICATIONS: See form V-RRDS1 for details of remote refrigeration characteristics by model.

CRATED DIMENSIONS & WTS.	HT.	WIDTH	DEPTH	FT³	LBS
ONE SECTION	84 1/2	59 1/4	43	124.59	550
TWO SECTION	84 1/2	59 1/4	43	124.59	550

NOTE: In order to provide peak operating performance the cabinet must have a 2 inch all around clearance and 12 inches above the top of the condensing unit. This ensures an adequate air supply and space for routine maintenance and/or service if required.