

PROJECT: _	
LOCATION:	
ITEM #:	

QUANTITY:

SHALLOW DEPTH FREEZERS **ULTRASPEC**[™] SERIES Featuring: Secure lemp (38) oõ V-TEMP CONTROL™ STANDARD FEATURES ULTRASPEC Secure-Temp 1.0[™] Technology V-TEMP[™] Electronic Control System LED Lighting with Proximity Door Switch Activates Interior Lighting VICTORY Expansion Valve Technology 20 Gauge, Stainless Steel Doors • Dual Speed, Energy Efficient, EC Fan Motors Santoprene Door Gaskets with Exclusive 2 Year Warranty Stainless Steel Breaker Strips High Performance, Balanced, Top-Mounted Refrigeration Environmentally Safe R-404a Refrigerant Plasticized Evaporator Fin Coils Non-Electric Condensate Evaporator • Foamed-in-Place Polyurethane Insulation Heavy Duty Cylinder Locks Self-Closing Doors with 120° Hold Open Feature · Cam-Lift Hinges, Guaranteed for Life • Ergonomically Correct Door Handles, Guaranteed for Life • S Series have 6" High, Adjustable Stainless Steel Legs Hinged Front Shroud Makes Condenser Cleaning Easier

- One Piece, Snap-In Magnetic Door Gasket(s)
- Anti-Condensate Door Perimeter Heaters
- Stainless Steel Interior Door Liner
- Energy Saving Thermal Breaker Caps, Guaranteed for Life
- Three (3) Epoxy Coated Wire Shelves per Cabinet Section
- Cord and Plug (see electrical data for details)

SECURE-TEMP 1.0[™]

Secure-Temp 1.0[™] is the industry's first and only full service temperature monitoring solution for your kitchen. Secure-Temp 1.0™ is standard on all Victory models and is HACCP compliant and meets NAFEM's data protocol. There is NO software or monthly monitoring fees. Optional add on kits are available for additional units in your kitchen that you want to monitor.

OPTIONS AND ACCESSORIES

- Remote Models
- Change Door Swing
- Correctional Facilities Options
- Stainless Steel Case Back and Shroud
- Stainless Steel Shelves
- 6" Overall Height Casters (Set of 4)
- Exterior Laminate Décor
- Adjustable Tray and Pan Slides
- Optional Voltages

	MODELS		
	LONG-DOOR	HALF-DOOR	
SERIES Stainless Steel Exterior and Interior	FS-1S-S1 FS-2S-S1	FS-15-S1-HS FS-2S-S1-HS	
SERIES Stainless Steel Exterior and Aluminum Interior	FSA-1S-S1 FSA-2S-S1	FSA-1S-S1-HS FSA-2S-S1-HS	

MODELC

FS-2S-S1




NOTE: Not all marks refer to all models 3 Year Parts and Labor Warranty • 5 Year Compressor Warranty

Victory Refrigeration specification sheets are available online at www.victoryrefrigeration.com

APPROVALS:

VICTORY

SHALLOW DEPTH FREEZERS

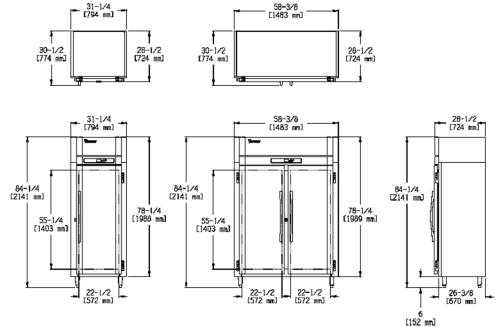

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- ¹/₄". Metric dimensions (MM)

CABINET CONSTRUCTION

The cabinet front and doors are constructed of heavy gauge, polished stainless steel to maintain an attractive appearance after years of heavy use. Polyurethane foam insulation throughout ensures the ultimate in energy efficiency. The front shroud lifts up to provide easy access when cleaning the condenser.

DOOR CONSTRUCTION

The doors are heavy gauge, polished stainless steel with a stainless steel interior liner. Each door is provided with a cylinder lock and ergonomically correct vertical handle. The door hinges are self-closing and have a hold-open feature at 120° which facilitates product loading. Proximity switches energize the recessed interior incandescent lighting when the door is opened. Humidity control wires around the door jamb prevent condensation from forming on the front of the cabinet in high humidity environments. The wires are concealed by a high impact, non-conducting thermal breaker cap.

REFRIGERATION SYSTEM

All components of the high efficiency, air-cooled, self-contained refrigeration system are mounted on top of the cabinet out of the food storage zone providing greater usable storage space. Environmentally friendly R-404a refrigerant is efficiently metered by an expansion valve providing a constant, safe operating temperature and quick "recovery" under the most demanding conditions. The hermetically sealed systems are designed to operate at 0[°]F. Each cooling coil has plasticized fin coils to resist food acids and dual-speed EC fan motor(s) for greater cooling capacity and efficiency. All condensate water is disposed of automatically by the energy efficient, non-electric condensate evaporator.

INTERIOR STORAGE ARRANGEMENTS

Each cabinet section is provided with three heavy-duty, epoxy coated wire shelves. The shelves are adjustable in one inch increments.

V-TEMP[™] CONTROL SYSTEM

The easy to use V-Temp[™] Control is provided standard with a two year parts and labor warranty. This durable, water resistant microprocessor monitors and controls the entire temperature maintenance process. It includes an ON/OFF switch, manual defrost, interior light switch, LED temperature indicator in [°]C or [°]F, a HI/LO audio/visual temperature alarm, power supply interruption, door ajar and "clean condenser" alarms. A manager's "lock-out" feature is provided to safeguard pre-determined control settings. A HAACP Event Indicator/Memory feature announces and records up to nine (9) alarm events. Unique to the V-Temp are two standard modes of operation:

SUPERCOOL - Provides a lower "set-point" refrigeration condition for a set period of time when food has just been loaded into the freezer and needs to be quickly brought back down to a safe temperature.

ENERGY SAVER - The cabinet automatically reverts to the energy saving mode when there are no door openings for four hours.

CHARACTERISTICS	1 SECTION	2 SECTION
DIMENSIONAL DATA		
Capacity Net (cubic ft.)	16.7	37.5
Width, Overall (in.)	31 ¼	58 ³ ⁄8
Depth, Overall (inc. handles)	30 ½	30 ¹ ⁄2
Depth, Door(s) open 90' (in.)	53 5%	53 ⁵ ⁄%
Clear Door Width (in.)	22 ¹ / ₂	22 ¹ / ₂
Clear Half-Door Height (in.)	25 ¾	25 ¾
Clear Full-Door Height (in.)	55 ¼	55 ¹ ⁄4
Height Overall (inc. 6" legs)	84 ¼	84 ¹ ⁄4
No. Full/Half Doors	1F, 2H	2F, 4H
No. of Shelves	3	6
Shelf Area (square ft.)	13.7	23.5
ELECTRICAL DATA		
Cabinet Voltage	115/60/1	115/60/1
Feed Wires	2	2
Condensing Unit Voltage	115/60/1	115/60/1
NEMA Plug	5-15P	5-15P
Total Amperes	10.9	11.9
REFRIGERATION DATA		
Condensing Unit Size	1/3 HP	½ HP
Refrigerant	R-404a	R-404a
Reingerant		11 4040

NOTE: Plug style, voltage and full load amps may vary depending on certain options selected such as glass doors, fluorescent lighting and compressor upgrades.

REMOTE APPLICATIONS

See form V-RRDS1 for remote refrigeration characteristics by model

CRATED DIMENSIONS & WTS.	HT.	WIDTH	DEPTH	CU. FT.	LBS
ONE SECTION	84 ½	36	43	75.70	360
TWO SECTION	84 ½	63 ¹ ⁄8	43	132.73	500

NOTE: In order to provide peak operating performance the cabinet must have a 2 inch all around clearance and 12 inches above the top of the condensing unit. This ensures an adequate air supply and space for routine maintenance and/or service if required.

** Remote units use R404a refrigerant standard and come with 6" legs.