

VICTORY

110 Woodcrest Road, Cherry Hill, NJ 08003-3648
856.428.4200 • 800.523.5008 • Fax: 856.428.7299
www.victoryrefrigeration.com • email: sales@victoryrefrigeration.com



PROJECT: _____

LOCATION: _____

ITEM #: _____

QUANTITY: _____

ULTRASPEC™ SERIES

UNDERCOUNTER RECESSABLE FREEZER

STANDARD FEATURES

- Stainless Steel Front, Top, Sides and Interior
- Recessable, Front-Breathing Refrigeration Design
- Environmentally Safe R-404A Refrigerant
- Thermometer
- Plasticized Evaporator Fin Coils
- Non-Electric Condensate Evaporator
- Foamed-in-Place Polyurethane Insulation
- One Epoxy Coated Wire Shelf
- Self-Closing Doors with 120° Hold Open Feature
- Cam-Lift Hinges, Guaranteed for Life
- Ergonomically Correct Door Handles, Guaranteed for Life
- Stainless Steel Front Louvered Grille
- One Piece, Snap-In Magnetic Door Gasket
- Anti-Condensate Door Perimeter Heater
- Stainless Steel Interior Door Liner
- Lifetime, Stainless Steel Breaker Caps
- 4 Stainless Steel Foot Levelers
- Cord and Plug (see electrical data for details)

OPTIONS AND ACCESSORIES

- Stainless Steel Shelf
- Low Profile 2" Overall Height Casters (Set of 4)
- Optional Voltages
- Two (2) Year Service Warranty



RUF-1-S1

MODELS



Stainless Steel
Exterior and Interior

RUF-1-S1




NOTE: Not all marks refer to all models

1 Year Parts and Labor Warranty • 5 Year Compressor Warranty

Victory Refrigeration specification sheets are available
online at www.victoryrefrigeration.com

APPROVALS:

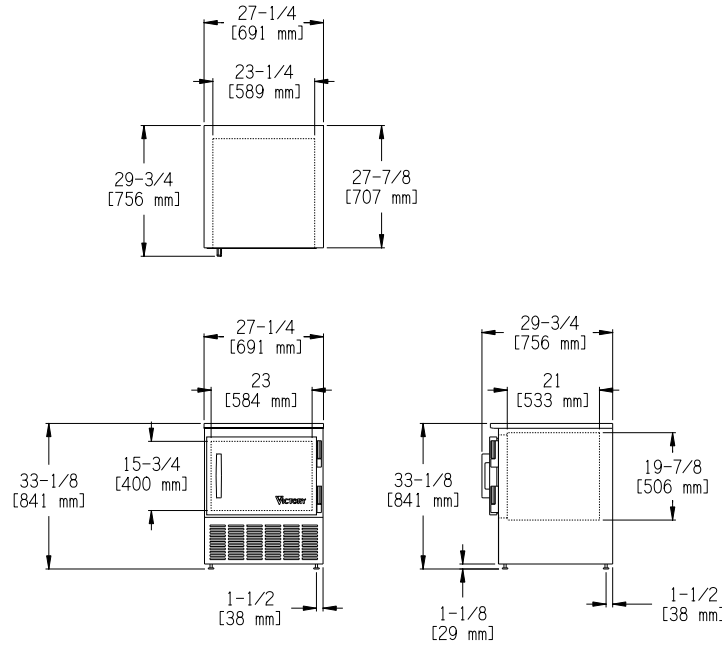

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CABINET CONSTRUCTION

This compact undercounter freezer is ideal for operations that have limited space in their workstations and will fit under existing worktables.

The cabinet front, doors, sides, top and interior are constructed of heavy gauge, polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in place polyurethane insulation throughout the cabinet and doors ensures the ultimate in energy efficiency. The front grille is removable to provide easy access to the condenser and facilitate cleaning.

DOOR CONSTRUCTION

The doors are heavy gauge, polished stainless steel with a stainless steel interior liner. Each door has an ergonomically correct vertical handle and a one-piece, self-adjusting magnetic gasket for a positive seal. The cam-lift door hinges are self-closing and have a hold-open feature at 120° which facilitates product loading. Condensate control wires are located around the door opening and help prevent condensation from forming on the front of the cabinet in high humidity environments. The wires are concealed and protected by a high impact, non-conducting thermal breaker cap.

REFRIGERATION SYSTEM

A high efficiency, air-cooled, self-contained refrigeration system is mounted under the storage compartment and located behind the easily removable front louvered grille. Environmentally friendly R-404A refrigerant is efficiently metered by a capillary system providing a constant, safe operating temperature and quick "recovery" under the most demanding conditions. The hermetically sealed system is designed to operate at 0°F. The fans and cooling coil, which is plasticized to resist food acids, move cold air from side to side, top to bottom to keep food product at a safe storage temperature. All condensate water is disposed of automatically by the energy efficient, non-electric condensate evaporator. The unique airflow design permits the cabinet to be enclosed on both sides or mounted flush against a wall.

INTERIOR STORAGE ARRANGEMENTS

Each cabinet is provided with a heavy-duty, epoxy coated wire shelf. The shelf height is adjustable in one inch increments.

CHARACTERISTICS

1 SECTION

DIMENSIONAL DATA

Capacity Net (cubic ft.)	5.0
Width, Overall (in.)	27 1/4
Depth, Overall (inc. handles)	29 3/4
Depth, Door(s) Open 90° (in.)	55 1/4
Clear Door Width (in.)	23
Clear Door Height (in.)	15 3/4
Height Overall	33 1/8
No. of Doors	1
No. of Shelves	1
Shelf Area (square ft.)	5.5

ELECTRICAL DATA

Cabinet Voltage	115/60/1
Feed Wires	2
Condensing Unit Voltage	115/60/1
NEMA Plug	5-15 P
Total Amperes	8.0

REFRIGERATION DATA

Condensing Unit Size	1/8 HP
Refrigerant	R-404A

NOTE: Plug style, voltage and full load amps may vary depending on certain options selected such as special voltages and compressor upgrades.

CRATED DIMENSIONS & WTS.	HT.	WIDTH	DEPTH	FT ³	LBS
ONE SECTION	39	33	34	25.32	305