

# Heating and Warming

The Vollrath Company, LLC

## Cayenne® Flange Mount Heat Strips

See features and benefits on E6-5

### To build item number:

- 1) Select wattage - (**low, medium or high**)
- 2) Then select length to find base number
- 3) Add voltage, control and leg suffixes to end of item number

### Lead configuration:

Supplied with lead wires and conduit through legs and an additional 18" lead wire encased in 12" of flexible conduit at bottom of leg.




### Complete Ordering Catalog Number Example

72923	32	6	8
60" Medium Wattage Flange Mount	208V Dual with lights	Remote Toggle	24" Direct Mount Legs



Note: Wattage recommendations are based on enclosed pass-throughs as required by UL. Individual performance may vary based on the conditions of each individual environment.

### Select wattage and single or dual

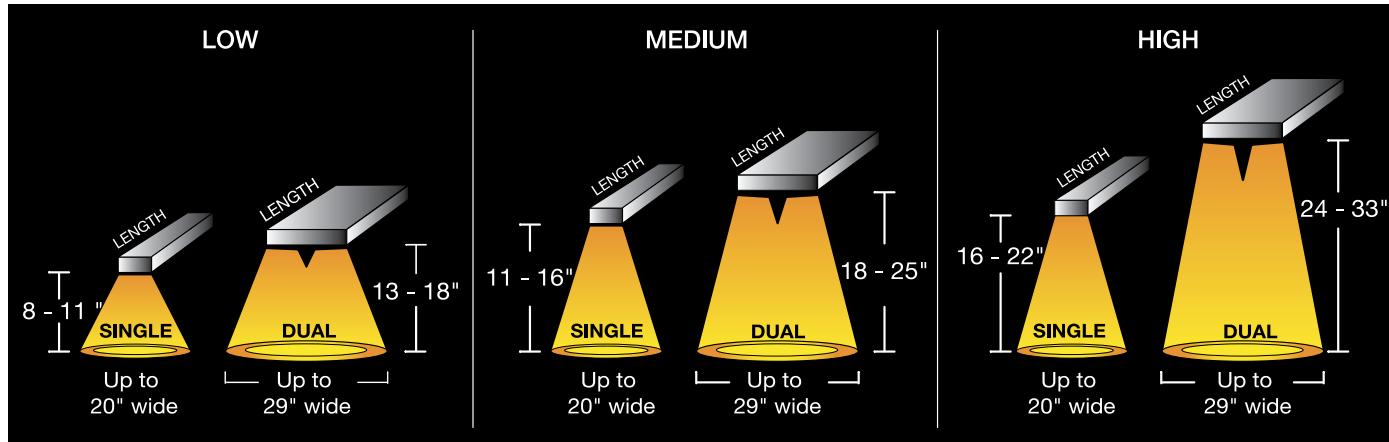

Note: Low value is UL's required distance to non-combustible surface - see page E6-6 for additional UL required clearances. High value is maximum height to retain food quality under ideal conditions.

### Low Wattage - Flange Mount

#### Select length and base number

LENGTH	CALROD-WATTAGE		BASE NUMBER
	SINGLE	DUAL	
18"	300	600	72901
24"	400	800	72904
30"	510	1020	72907
36"	610	1220	72910
42"	720	1440	72913
48"	820	1640	72916
54"	925	1850	72919
60"	1025	2050	72922
66"	1120	2240	72925
72"	1230	2460	72928

#### Add voltage suffix

WITHOUT LIGHTS		
SINGLE	120V SUFFIX	208V SUFFIX
01	02	03

WITH LIGHTS <sup>①</sup>		
SINGLE	120V SUFFIX	208V/120V SUFFIX
11	12	13

DUAL	120V SUFFIX	208V SUFFIX
21	22	23

#### Add control suffix

CONTROL <sup>②</sup>	SUFFIX NO.
ONBOARD TOGGLE	9
REMOTE TOGGLE	6
REMOTE INFINITE SWITCH	7
NO CONTROL (OEM APPLICATIONS)	5

#### Add leg suffix<sup>③</sup>

LEG HEIGHT	SUFFIX NO.
8" (20.3 cm)	0
10" (25.4 cm)	1
12" (30.3 cm)	2
14" (35.5 cm)	3
16" (40.6 cm)	4
18" (45.7 cm)	5

<sup>③</sup>Dual Flange Mount heat strips are shipped with two sets of legs.

Note: All heat strips are custom ordered and therefore cannot be cancelled or returned per Vollrath Terms & Conditions.

<sup>①</sup>See page E6-11 for lighted section amp draw and bulb quantity supplied.

<sup>②</sup>Controls cannot be retro fitted.

**Medium Wattage - Flange Mount**

Select length and base number			Add voltage suffix				Add control suffix			Add leg suffix <sup>③</sup>			
LENGTH	CALROD-WATTAGE		BASE NUMBER	WITHOUT LIGHTS			WITH LIGHTS <sup>①</sup>			CONTROL <sup>②</sup>	SUFFIX NO.	LEG HEIGHT	SUFFIX NO.
	SINGLE	DUAL		120V SUFFIX	208V SUFFIX	240V SUFFIX	120V SUFFIX	208V/120V SUFFIX	240V/120V SUFFIX				
18"	415	830	72902							ONBOARD TOGGLE	9	12" (30.3 cm)	2
24"	550	1100	72905							REMOTE TOGGLE	6	14" (35.5 cm)	3
30"	690	1380	72908							REMOTE INFINITE SWITCH	7	16" (40.6 cm)	4
36"	825	1650	72911							OEM CONTROL	5	18" (45.7 cm)	5
42"	965	1930	72914									20" (50.8 cm)	6
48"	1100	2200	72917									22" (55.8 cm)	7
54"	1240	2480	72920									24" (60.9 cm)	8
60"	1380	2760	72923										
66"	1515	3030	72926										
72"	1660	3320	72929										

<sup>①</sup>See below for lighted section amp draw and bulb quantity supplied.

<sup>②</sup>Controls cannot be retro fitted.

<sup>③</sup>Dual Flange Mount heat strips are shipped with two sets of legs.

**High Wattage - Flange Mount**

Select length and base number			Add voltage suffix				Add control suffix			Add leg suffix <sup>③</sup>			
LENGTH	CALROD-WATTAGE		BASE NUMBER	WITHOUT LIGHTS			WITH LIGHTS <sup>①</sup>			CONTROL <sup>②</sup>	SUFFIX NO.	LEG HEIGHT	SUFFIX NO.
	SINGLE	DUAL		120V SUFFIX	208V SUFFIX	240V SUFFIX	120V SUFFIX	208V/120V SUFFIX	240V/120V SUFFIX				
18"	540	1080	72903							REMOTE TOGGLE	6	16" (40.6 cm)	4
24"	720	1440	72906							REMOTE INFINITE SWITCH	7	18" (45.7 cm)	5
30"	900	1800	72909							OEM CONTROL	5	20" (50.8 cm)	6
36"	1080	2160	72912									22" (55.8 cm)	7
42"	1260	2520	72915									24" (60.9 cm)	8
48"	1435	2870	72918									26" (66.0 cm)	9
54"	1615	3230	72921										
60"	1800	3600	72924										
66"	1980	3960	72927										
72"	2160	4320	72930										

Note: 66" and 72" length units are not available in 120V.

<sup>①</sup>See below for lighted section amp draw and bulb quantity supplied.

<sup>②</sup>Controls cannot be retro fitted.

<sup>③</sup>Dual Flange Mount heat strips are shipped with two sets of legs.

**Accessories****Kool-Touch® Trim for All Styles**

- Offers a low cost method to help prevent costly burns by incidental contact with heat strip side surface
- Enhances the visual appearance of the heat strips or light strips
- Field retrofittable

**Teflon®-Coated Shatterproof Light Bulbs**

UNIT LENGTH	NUMBER OF 40 WATT SHATTERPROOF BULBS	TOTAL AMP (120V)
18" - 30"	2	.7
36" - 48"	4	1.4
54" - 72"	6	2.1
84" - 108"	8	2.8
120" - 144"	12	4.2

Note: Replacement Bulbs - Item 23236  
Case Lot 4

**Kool-Touch® Trim**

TRIM LENGTH	ITEM	CASE LOT
18" (47.7cm)	1789718	2
24" (60.9 cm)	1789724	2
30" (76.2 cm)	1789730	2
36" (91.4 cm)	1789736	2
42" (106.6 cm)	1789742	2
48" (121.9 cm)	1789748	2
54" (137.1 cm)	1789754	2
60" (152.4 cm)	1789760	2
66" (167.6 cm)	1789766	2
72" (182.8 cm)	1789772	2

For lengths over 72" (182.8 cm), order trim in two pieces that equal the desired length. Some field trimming required.

Note: All heat strips are custom ordered and therefore cannot be cancelled or returned per Vollrath Terms & Conditions.