



Project:

Item Number:

Quantity:

CAYENNE® ELECTRIC GRIDDLES



Cayenne® Electric Griddle - Model 40716

DESCRIPTION

Vollrath Cayenne® Electric Griddles serve up the best steaks, chops, burgers, mixed grills, seafood and pancakes. They are ideal for breakfast – eggs, tomatoes, bacon – The possibilities are endless.

Ideal for use in steak houses, restaurants, coffee shops, clubs and pubs. Vollrath electric griddles are portable and compact for outside caterers.

MODELS

- 40715 14" Flat Top Electric Griddle
- 40716 24" Flat Top Electric Griddle
- 40717 36" Flat Top Electric Griddle

FEATURES

- Superior element design ensures even heating over entire cooking surface
- All units ship with cord and plug installed
- Fast startup and recovery times
- Heavy-duty polished cooking surface for high heat retention
- Griddle plate is fully welded to base
- 2½" (6.35 cm) back and sloped side splashes
- Knob guards protect against accidental changes or damage
- Internally-mounted grease collection pan for cleaner appearance and easier cleaning and maintenance
- Cooking surface depth: 16½" (41.9 cm)
- 120V, 14" unit (40715) is ideally sized for buffet, brunch, or catering applications
- 36" (40717) model features independent controls per 12" heating zone, creating multiple stations in one unit

Agency Listings



Due to continued product improvement, please consult www.vollrathco.com for current product specifications.

Approvals

Date:



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560
 Main Fax: 800.752.5620 or 920.459.6573


Technical Services: 800.628.0832
 Technical Services Fax: 920.459.6573

CAYENNE® ELECTRIC GRIDDLES

MODELS		
40715	14" Flat Top Electric Griddle	
40716	24" Flat Top Electric Griddle	
40717	36" Flat Top Electric Griddle	

DIMENSIONS

□ Dimensions shown in inches (cm).

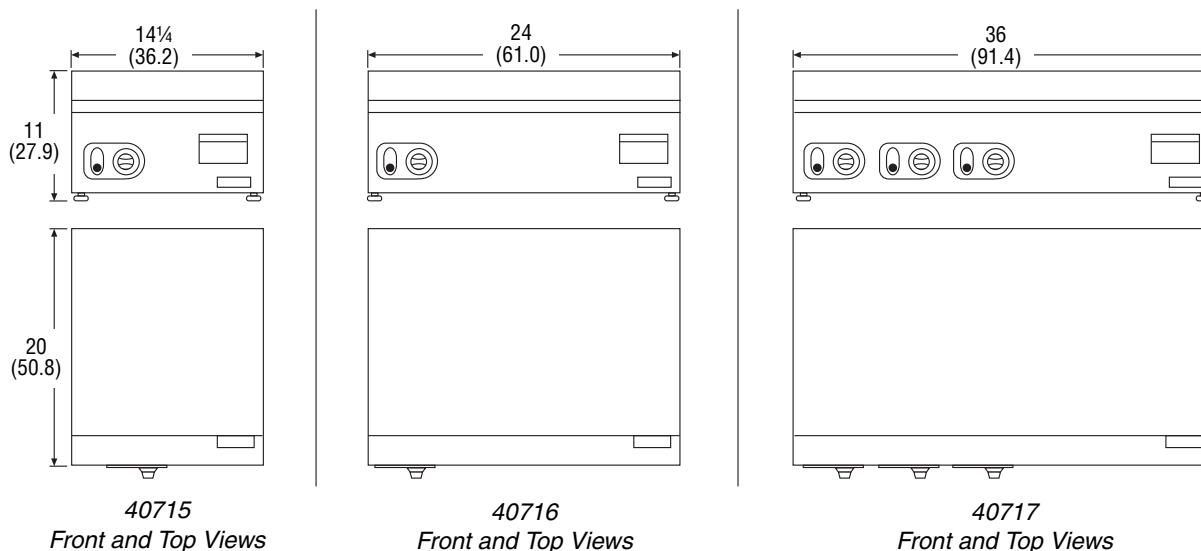

ELECTRICAL SPECIFICATIONS

Item	Watts	Volts	Amps	Plug
40715	1800	120	15.0	5-15P
40716	3000	220*	13.6	6-15P
40717	8400	220*	38.0	6-50P

*Single Phase

Receptacles

