



Project:

Item Number:

Quantity:

Warmers: 4/3 Thermoset Drop-in

The Vollrath Company, L.L.C.

WARMERS: 4/3 THERMOSET DROP-IN

MODELS	72109	120V AC, 1600W
TD43R-DI:	72112	240V AC, 1600W
	72111	120V AC, 1600W (Canada Only)



4/3 Thermoset Drop-in Warmer

FEATURES

- Thermoset fiber-reinforced, self-insulating resin well provides maximum energy efficiency
- Low water indicator light eliminates guesswork
- No-drip lip on top rim of well
- Dome elements positioned inside well for maximum energy transfer
- Non-stick coating on elements for easy clean-up
- Top-mount for ease of installation
- Holds up to four 1/3 size, 4" (10.2 cm) deep pans for greater serving capacity
- Thermostatic temperature control
- Low water indicator light eliminates guesswork
- 5-ft. (152.4 cm) cord and plug
- 5-ft. (152.4 cm) control cable for remote installations
- Meets NSF4 hot holding and rethermalization performance standards
- UL Listed

DESCRIPTION

Drop-in is designed with a self-insulating thermoset well for ease of installation in solid-surface, laminate, or metal countertops. Minimal heat transfer to the work surface allows the drop-in to be installed without a breaker strip.

Drop-in has an integral drain. Molded tailpiece extension allows the drain to be routed to fit cabinet interior clearances.

The thermoset well drop-in has two cast aluminum dome elements mounted in the bottom of the well for efficient energy transfer. Dome elements require that the unit must be used with water in the well.

PERFORMANCE CRITERIA

Drop-in warmer is designed to hold heated prepared foods at temperatures above the HACCP "danger zone" of 140° F (60° C). The performance standard is measured using the NSF mixture preheated to 165° F (73.9° C). The electric unit will hold the temperature of this product above 150° F (65.6° C). The temperature will be maintained best when the food product and pan are used with a standard cover, the proper water level is maintained in the well, and the food product is stirred regularly.

Agency Listings



Approvals
Date:



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53082-0611
 U.S.A.
 Main Tel: 800.624.2051
 Service Tel: 800.628.0832
 FAX: 800.752.5620

Vollrath of Canada, Co.
 Tel: 800.695.8560
 FAX: 800.752.5620




WARMERS: 4/3 THERMOSET DROP-IN

MODELS:	72109	120V AC, 1600W
	72112	240V AC, 1600W
	72111	120V AC, 1600W (Canada Only)




DIMENSIONS AND RATINGS

- ❑ Overall dimension with drain valve: 28.75" x 13.75" x 14" (73.025 cm x 34.925 cm x 35.56 cm)
- ❑ Maximum cutout dimension: 28.25" x 13.25" (71.755 cm x 33.655 cm)

Item	Cutout Dimensions IN (CM)	Dimensions (L X W X H) IN (CM)	Voltage	Watts	Amps	Plug	Case Lot
72109	13¼ x 28¼ (33.6 x 71.7)	28¾ x 13¾ x 13½ ₁₆ (73 x 34.9 x 33.2)	120V AC	1600	13.3	5-15P	1
72112	13¼ x 28¼ (33.6 x 71.7)	28¾ x 13¾ x 13½ ₁₆ (73 x 34.9 x 33.2)	240V AC	1600	7.7	6-15P	1
72111	13¼ x 28¼ (33.6 x 71.7)	28¾ x 13¾ x 13½ ₁₆ (73 x 34.9 x 33.2)	120V AC	1600	13.3	5-20P	1

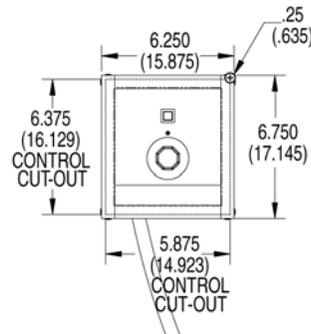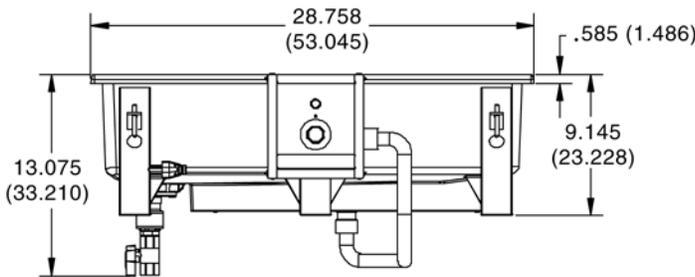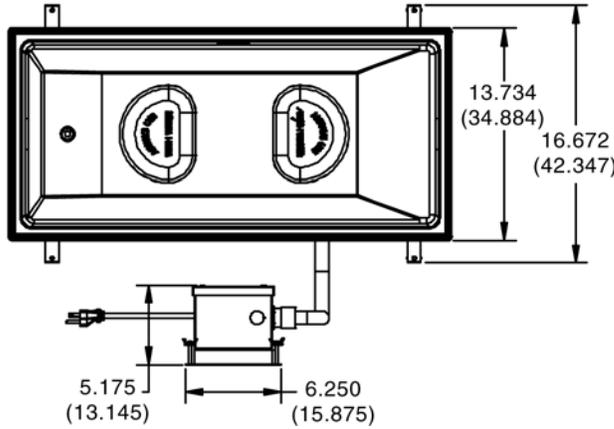

Receptacles



www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53082-0611
U.S.A.
Main Tel: 800.624.2051
Service Tel: 800.628.0832
FAX: 800.752.5620

Vollrath of Canada, Co.
Tel: 800.695.8560
FAX: 800.752.5620