



Outperform every day.™

Project:

Item Number:

Quantity:

SIGNATURE SERVER® CLASSIC UTILITY STATIONS

FEATURES

- Reinforced stainless steel unibody construction provides extra durability in a lightweight, mobile base
- Base is 18-gauge 300 Series stainless steel clad with black laminate. Optional colors and finishes are also available.
- Top is one-piece 16-gauge 300 Series stainless steel
- Optional 14 gauge work surface available
- Heavy-duty 4" (10 cm) swivel casters with brakes



Signature Server® Classic Utility Stations

Note: Signature Server® equipment orders cannot be cancelled or returned.

DESCRIPTION

Signature Server® Classic is the choice when functionality and modular ease of use are your top priorities. Signature Server® Serving Equipment is an industry standard, with updated features to better serve the operator.

WARRANTY: All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

MODELS AND OPTIONS

Base			
Width	Height / Item No		
	27" (69)	30" (76)	34" (86)
28" (71)	36220	36120	37020
46" (117)	36221	36121	37021
60" (152)	36222	36122	37022
74" (188)	36223	36123	37023
88" (224)	–	–	98711

Options			Breath Guards	Lighting / Heating	Accessories
Color (Black is standard)					
Matte Laminate	Wood Grain	Stainless Steel			
36683	36690	36696	Choose from: Progressive, Contemporary, Traditional, Classic Cafeteria, Classic Economy Buffet, Access® and Classic Speed Serve. See Breath Guard spec sheets for selection information.	Choose from: Incandescent, infrared, fluorescent, heat strips and heat strips with lights. See Breath Guard spec sheets for selection information.	Choose from: Plate rests, cutting boards, end shelf, tray slides, storage modules, false bottoms, bag in box, stationary legs. See Accessories spec sheet for selection information.
36680	36687	36693			
36681	36688	36694			
36682	36689	36695			
98835	98835	93836			

Use only Vollrath accessories, including breath guards. Vollrath is not responsible for the fit or installation of custom made accessories and components. Custom accessories and components may void agency listings.

Agency Listings



Due to continued product improvement, please consult www.vollrath.com for current product specifications.

Approvals	Date



Outperform every day.™
www.vollrath.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201 U.S.A.
 Customer Service: 800.628.0830
 Canada Customer Service: 800.695.8560
 Main Fax: 800.752.5620 or


Technical Services: 800.628.0832
 Technical Services Fax:
 920.459.5462

SIGNATURE SERVER® CLASSIC UTILITY STATIONS

DIMENSIONS (Shown in inches (cm))




Top View

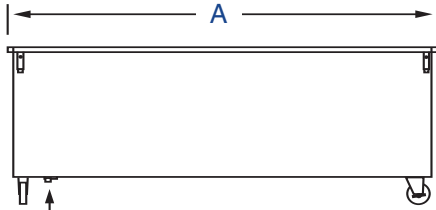

Power Supply Cord/Plug

Operator Side View

Clearance between base
and floor 5¼ (13.3)



End View

Model	(A) Width	(B) Height
36220	28 (71)	27 (69)
36120		30 (76)
37020		34 (86)
36221	46 (117)	27 (69)
36121		30 (76)
37021		34 (86)
36222	46 (117)	27 (69)
36122		30 (76)
37022		34 (86)
36223	74 (188)	27 (69)
36123		30 (76)
37023		34 (86)
98711	88 (224)	34 (86)

ELECTRICAL SPECIFICATIONS

Base Unit Voltage	Lighting/Heating Choice	28 (71)		46 (117)		60 (117)		74 (188)		88 (224)	
		Total Amps	Plug	Total Amps	Plug	Total Amps	Plug	Total Amps	Plug	Total Amps	Plug
120	Heat Strip	3.5	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	9.4	NEMA 5-15P	10.5	NEMA 5-15P	10.2	NEMA 5-15P
	Heat Strip w/ lights	4.5	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	7.3	NEMA 5-15P	13.2	NEMA 5-15P	13	NEMA 5-15P
	Fluorescent	0.5	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P	0.5	NEMA 5-15P	0.5	NEMA 5-15P	0.5	NEMA 5-15P
	Incandescent	1	NEMA 5-15P	NEMA 5-15P	NEMA 5-20P	8.3	NEMA 5-20P	10.4	NEMA 5-20P	12.5	NEMA 5-20P
	Infrared	3	NEMA 5-15P	NEMA 5-15P	NEMA 5-20P	8.3	NEMA 5-20P	10.4	NEMA 5-20P	12.5	NEMA 5-20P

Receptacles



Outperform every day.™

www.vollrath.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201 U.S.A.
Customer Service: 800.628.0830
Canada Customer Service: 800.695.8560
Main Fax: 800.752.5620 or

Technical Services: 800.628.0832
Technical Services Fax:
920.459.5462