# **VULCAN**

### VCH88 COOK AND HOLD OVEN

Item # \_



Model VCH88





UL listed. UL listed to Canadian safety standards. Classified by UL to NSF Standard #4.

### **SPECIFICATIONS**

Vulcan Model No. VCH88 Cook and Hold Oven with capacity for sixteen 18" x 26" sheet pans on 3" centers or thirty-two 12" x 20" x 21/2" steam table pans. Solid state controls capable of cooking at temperatures up to 350°F and holding at temperatures up to 250°F. Unit can also be used to rethermalize products. Knob style controls set the cooking time, cooking temperature, and holding temperature. Digital display shows time in minutes, cooking temperature, holding temperature, and oven temperature. Controls may also be programmed with nine custom programs. The low speed fan provides even heat distribution and natural browning of meat products. Ovens come with 10 pairs of removable universal tray slides and 4 wire pan cooking grids. Unit comes with 20 gauge stainless steel inside and out, a welded tubular steel frame, full insulation, a removable control/power module, 5" heavy duty casters (2 swivel with brakes and 2 rigid), magnetic action door latch plus a life time warranty on heating elements. Dual voltage 208/240 volt, single phase, 50/60 Hz, complete with two cords and plugs (NEMA 6-30).

#### **Exterior Dimensions:**

26" W x 38" D x 82½" H on 5" heavy duty casters (2 swivel with brakes, 2 rigid)

#### **STANDARD FEATURES**

- Cook and hold oven with capacity for sixteen 18" x 26" sheet pans on 3" centers or thirty-two 12" x 20" x 2½" steam table pans
- Cook at temperatures up to 350°F (177°C)
- Hold at temperatures up to 250°F (121°C)
- Unit can also be used to rethermalize products
- Knob style controls set the cooking time, cooking temperature, and holding temperature
- Digital LED display shows: time in minutes, hold temperature, cook temperature, and cabinet temperature
- Controls may also be programmed with nine custom programs
- Low speed fan provides even heat distribution and natural browning of meat products
- Removable control/power module
- Provided with 10 pairs of removable universal tray slides adjustable on 1½" centers
- Provided with 4 wire pan grid cooking racks
- Interior and exterior are both constructed out of 20 gauge stainless steel
- Welded tubular steel frame for maximum strength
- Fully insulated 2" in top and 1" in sides and bottom
- Magnetic action door latch and heavy duty hinges secured to internal frame
- 5" Heavy duty casters (2 swivel with brakes and 2 rigid)
- Dual voltage 208/240 volt, single phase, 50/60 hz
- Complete with two cords and plugs (NEMA 6-30)
- Life time warranty on heating elements


Left hand hinged door
Additional universal tray slides
Additional cooking racks

☐ Full perimeter bumper





# VCH88 COOK AND HOLD OVEN

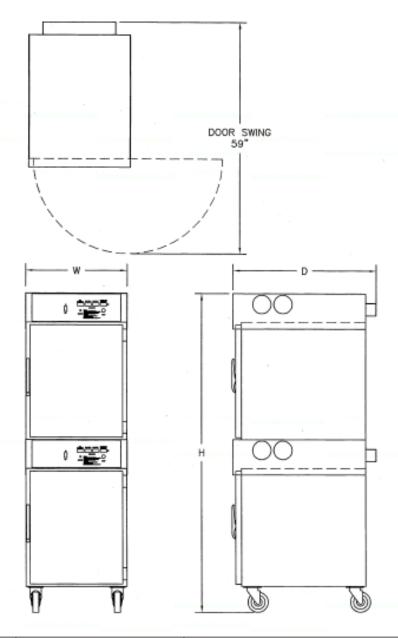

PAN	EXTERIOR DIMENSIONS	ELECTRICAL PER COMPARTMENT			SHIPPING WEIGHTS
CAPACITY		VOLTS	WATTS	AMPS	LBS / KG
<b>16 Baking Pans:</b> 18" x 26" x 1" or	26" W x 38" D x 82.5" H	208 240	3,800 5,060	19 22	565 lbs. / 256 kg.
32 Steam Table Pans: 12" x 20" x 2½"					

This appliance is manufactured for commercial use only and is not intended for home use.



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

