GRIDDLES & BROILERS



VCM SERIES GAS INFRARED CHEESEMELTER

Item #



Model VCM48







SPECIFICATIONS

Gas infrared cheesemelter broiler, Vulcan Model No. ______. Stainless steel exterior. Equipped with heavy-duty pre-mix atmospheric infrared burners. Heavy-duty chrome plated grid rack and 3 position rack guide. 3/4" rear gas connection and gas pressure regulator.

Exterior Dimensions:

_____"w x 20½"d x 19½16"h.

CSA design certified. NSF listed.

SPECIFY TYPE OF GAS WHEN ORDERING. SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

□ VCM24	24" cheesemelter broiler
□ VCM34	34" cheesemelter broiler
□ VCM36	36" cheesemelter broiler
□ VCM48	48" cheesemelter broiler
□ VCM60	60" cheesemelter broiler
□ VCM72	72" cheesemelter broiler

STANDARD FEATURES

- Stainless steel front, top, bottom and sides.
- Equipped with heavy-duty pre-mix atmospheric infrared burners.
- Standing pilot ignition system.
- Heavy-duty chrome plated grid rack and 3 position rack guide.
- Removable full width spillage pan.
- 3/4" rear gas connection and gas pressure regulator.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Set of stainless steel wall mount brackets.
- ☐ Set of four 4" legs with adjustable feet.



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602



VCM SERIES GAS INFRARED CHEESEMELTER

INSTALLATION REQUIREMENTS:

- A gas pressure regulator sized for this unit is included. Natural Gas 5.0" W.C. Propane Gas 10.0" W.C.
- 2. Gas line connecting to appliance must be $^3\!4$ " diameter or larger. If flexible connectors are used, the inside diameter must be the same as the $^3\!4$ " iron pipe.
- An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169, www.NFPA.org. When writing, refer to NFPA No. 96.
- These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas Association, Accredited Standards Committee Z223 @ 400N. Capital St. NW,


Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park, Quincy, MA 02169-7471.

NOTE: In the Commonwealth of Massachusetts

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

5. Clearances:	Combustible	Non-Combustible
Rear	2"	0"
Sides	20"	0"
Bottom	10"	4"

6. This appliance is intended for commercial installation only and is not intended for home use.

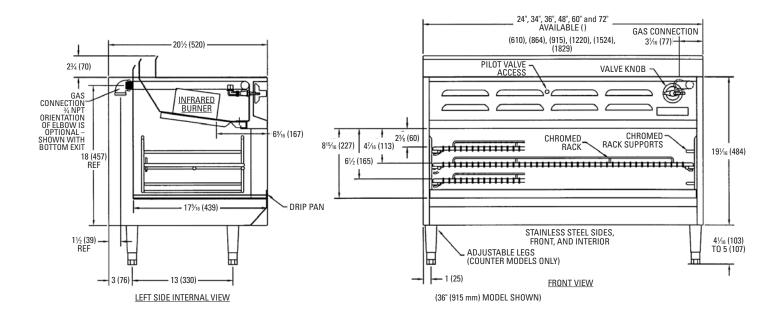

MODEL	WIDTH	DEPTH	OVERALL HEIGHT	NUMBER OF BURNERS	TOTAL BTU/HR	APPROX SHIP WT (LB/KG)
VCM24	24"	201/2"	191/16"	1	18,000	106/48
VCM34	34"	201/2"	191/16"	1	24,000	159/72
VCM36	36"	201/2"	191/16"	1	24,000	159/72
VCM48	48"	201/2"	191/16"	2	36,000	212/95
VCM60	60"	201/2"	191/16"	2	42,000	265/119
VCM72	72"	201/2"	191/16"	2	48,000	318/143



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

