

WFAE-30F FRYER



Wells WFAE-30F High Production Open Fryer is engineered to meet today's high quality food service standards. The sleek, compact design of the WFAE-30F takes up less space than a standard fryer and uses up to 25% less oil than similar models.

Features

- **Automatic Oil Temperature Control** ensures precise temperatures to produce consistent high quality products while minimizing energy consumption.
- **Flat bar element**, located below the basket, is heavy-duty stainless steel with a low watt density for longer oil life.
- **Repeat cycle timer** activates using one push button operation.
- **Oil filter system** is easy to operate and combined with Flavor Saver Filter Powder will **substantially increase oil life**.
- **Automatic basket lift cradle** raises basket above oil at end of timed cook cycle, maximizing handling safety.
- **Cover** opens and closes automatically with the basket.
- **Round frypot** is constructed of spun stainless steel with a 30 lb. oil capacity.
- **Nickel-plated, perforated steel basket** has a detachable handle for lowering and removing basket from the frypot.
- **The WFAE-30F fryer** is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

Specifications

Overall Dimensions:	Inches	MM
Width	15 3/4	400
Depth	33 1/4	845
Height (incl. 4" legs)	40	1016
Oil Capacity:	Lbs.	KG
WFAE-30F	30	14
Typical Production:	Lbs.	KG
Chicken <i>frozen</i>	12	5
Chicken <i>fresh</i>	14	6
Weights:	Lbs.	KG
Installed	167	75
Shipping	217	98

Export

The following model is available for export and meets the standards for CE:

- WFAE-30FEU, 380-415V, 3Ø, 9300 watts

Accessories / Options

- Flavor Saver Oil Filter Powder, 45 packs, 22410
- Oil Filter Paper, 21711
- Rear Leg Kit, 22692






MODEL WFAE-30F FRYER

DIMENSIONS:

INCH
(MM)

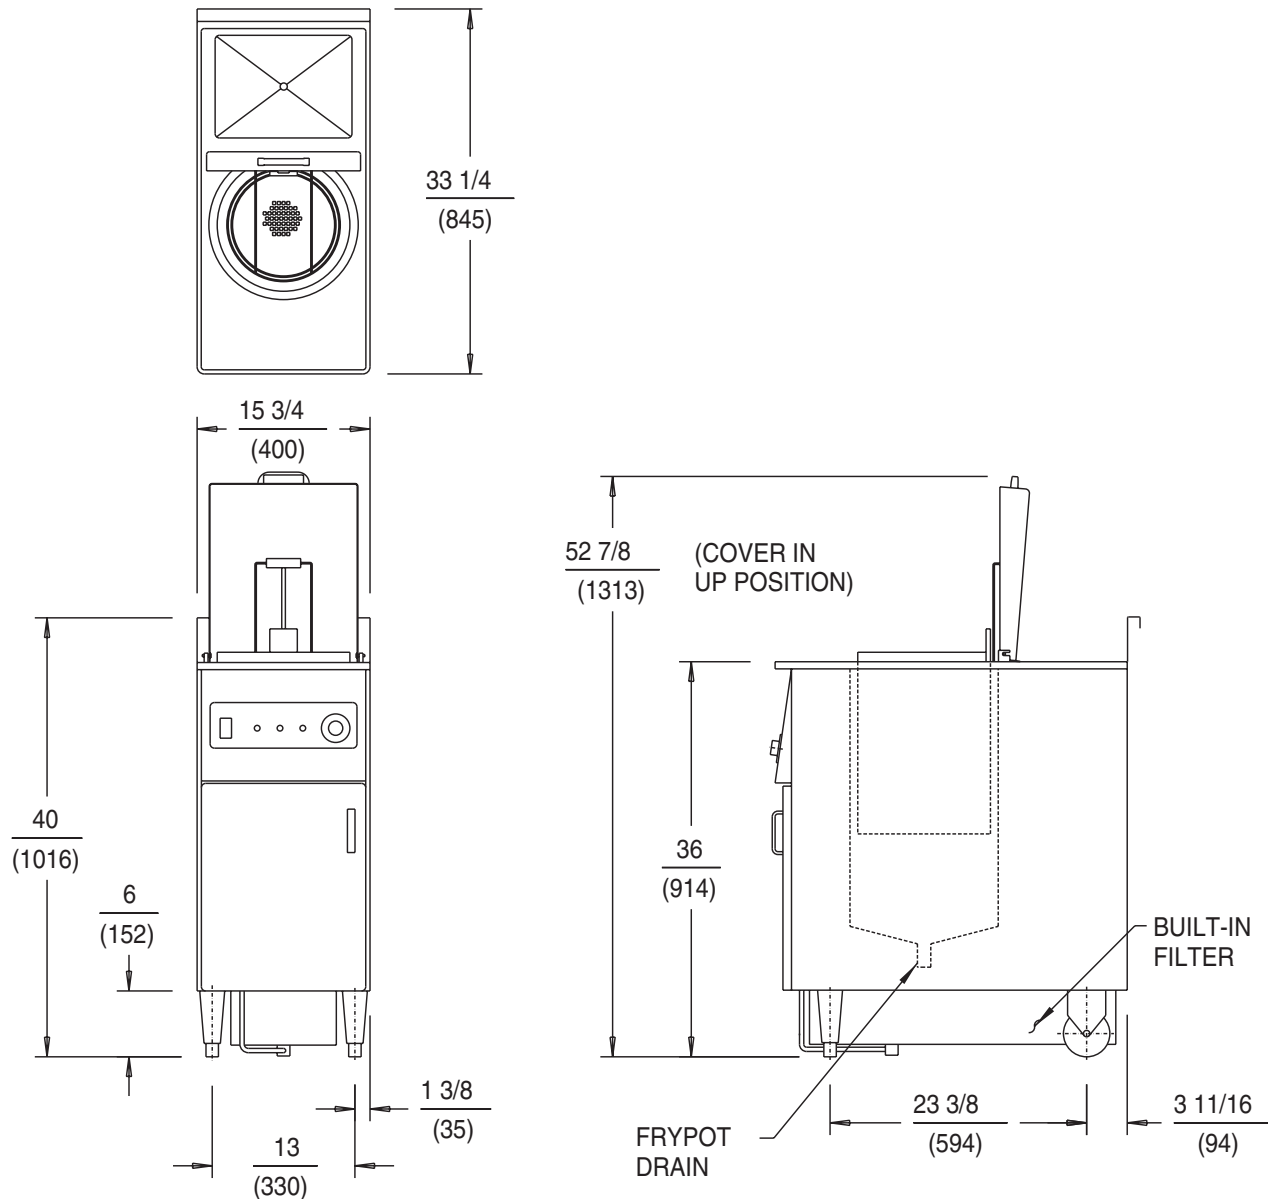

WFAE-30F ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				POWER SINGLE PHASE SUPPLY CORD
			L1	L2	L3	N	
WFAE-30F	208	9000	25.5	25.0	25.5	NA	NONE
WFAE-30F	240	9000	22.3	21.7	22.3	NA	NONE
WFAE-30FEU	380-415	9300	14.3	13.0	13.0	2.7	NA

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

WELLS MANUFACTURING COMPANY
 2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972
 FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com
 © 2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 03/01 • REV(D) • PART NO. 47342

