WFAE-55F, WFAE-55FS OPEN FRYER



Specifications

•		
Overall Dimensions:	Inches	MM
Width Depth Height (incl. 4" legs)	15 11/16 37 5/16 45 11/16	398 964 1160
Oil Capacity:	Lbs.	KG
WFAE-55F/FS	55	25
Typical Production:	Lbs.	KG
Chicken frozen Chicken fresh *With standard basket only	25* 33*	11 15
Weights:	Lbs.	KG
Installed Shipping	212 262	96 119

Export

The following models are available for export and meet the standards for **CE**:

- WFAE-55FEU, 380-415VAC, 3Ø, 17100 watts
- WFAE-55FSEU, 380-415VAC, 3Ø, 17100 watts

Wells WFAE-55F and WFAE-55FS High Production Open Auto Lift Fryers are engineered to meet today's high quality food service standards. These fryers give the user the highest production available in the industry today, while only requiring 4.9 square feet of floor space and use up to 25% less oil than similar models.

Features

- Automatic Oil Temperature Control ensures precise temperatures to produce consistent high quality products while minimizing energy consumption.
- Flat bar elements, located below the basket, are heavy-duty stainless steel with a low watt density for longer oil life.
- The solid state control on the WFAE-55FS incorporates a seven key programmable time and temperature menu.
- Repeat cycle timer activates using one push button operation.
- Paperless filtration system reduces labor and cleans oil more efficiently, and combined with Flavor Saver Filter Powder, will substantially increase oil life.
- Automatic basket lift cradle raises basket above oil at end of timed cook cycle, maximizing handling safety.
- **Frypot** is constructed of stainless steel and robotically welded for durability.
- Fryers are Underwriters Laboratories, Inc. LISTED and meet NSF International standards.
- A one-year warranty against defects covers parts and labor.

Accessories / Options

Flavor Saver Oil Filter Powder, 45 packs, 22410 Rear Leg Kit, 22692 Half-Size Baskets Available



WELLS MANUFACTURING












MODEL WFAE-55F **FRYER**

DIMENSIONS:







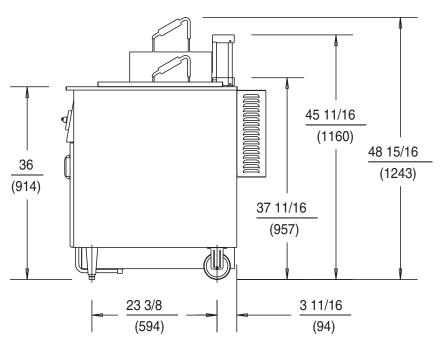

WFAE-55F ELECTRICAL SPECIFICATIONS:

MODELS VOLTS		WATTS	AMPS PER LINE PHASE 3			ASE 3	AMPS	POWER
			L1	L2	L3	N	SINGLE PHASE	SUPPLY CORD
WFAE-55F	208	17000	47.2	47.2	47.2	NA	NA	NA
WFAE-55F	240	17000	41.0	41.0	41.0	NA	NA	NA
WFAE-55FE	J 380-41	5 17100	26.0	24.0	24.0	3.0	NA	NA

All models with an 'S' suffix have the same electrical specifications as the standard units

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

WELLS MANUFACTURING COMPANY

2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972

FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com
© 2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 03/01 • REV(C) • PART NO. 300059

