

IMPINGEMENT CONVEYOR OVEN



Model BPICO-1820

Specifications

Bakers Pride Impingement Conveyor Ovens feature both variable cooking temperature and conveyor speed plus balanced jet plates; a combination that optimizes bake times and provides highly consistent product quality! The removable conveyor section makes cleaning the belt quick and easy.

Ovens may be stacked up to three high. Oven exteriors are all heavy-gauge, type 403 stainless steel.

Oven interiors are manufactured of high-heat resistant 16 gauge stainless steel.

All models feature adjustable eyebrow dampers for perfectly balanced results. Both top and bottom jet plates are removable as are the crumb trays for trouble free care.

2 year limited parts and labor warranty standard.

Model – BPICO-1820 Model – BPICO-1820VL

Standard Features

- BPICO 208V in both Single and Three Phase @ 26,700 BTUH
- Front mounted controls
- 150 to 550° F (65°-288°C) thermostat
- Top and bottom heavy duty jet plates
- Removable jet plates
- Removable conveyor section
- 48" (1220mm) conveyor length
- 18" (460mm) conveyor width
- Adjustable dampers (both sides)
- All stainless steel exteriors
- Adjustable conveyor speed (1 min to 24 min exposure time)
- Reversible conveyor direction
- Removable crumb trays
- Unit is available in a ventless model
- Adjustable legs
- 2 year limited parts and labor warranty





Certifications

NSF – UL – CE in approval process

IMPINGEMENT CONVEYOR OVEN

All Dimensions Nominal

Maximum Product Width: 18.75"
Maximum Product Height: 2.5"

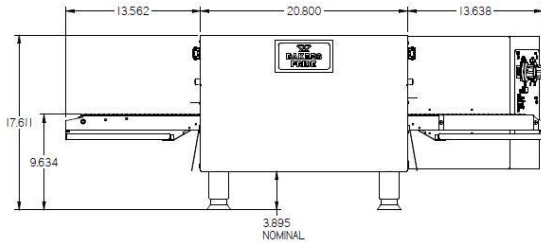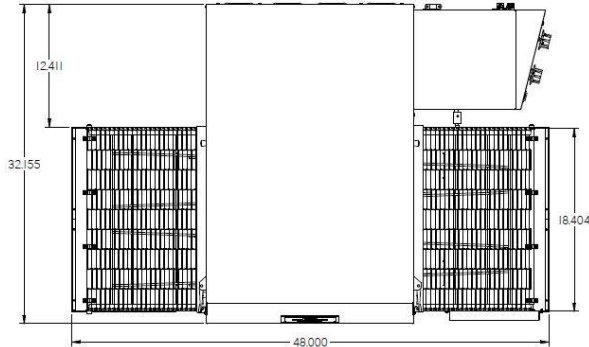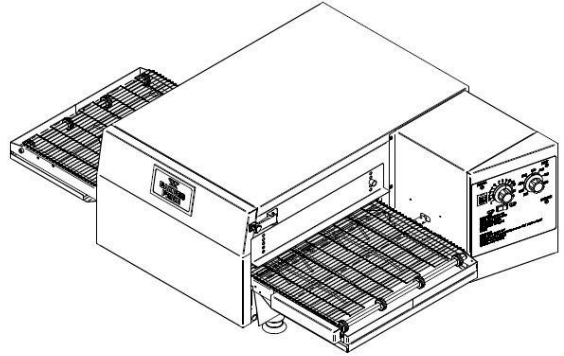

SHIPPING INFORMATION

Model	Shipping Weights		Carton Dimensions			Crate Size	
	Lbs.	Kilos	Width inches / (mm)	Depth inches / (mm)	Height inches / (mm)	Cubic Feet	Cubic Meter
1820	250	115	36.25 (921)	52.0 (1320)	23.0 (585)	25.0	.75
1820-VL	250	115	36.25 (921)	52.0 (1320)	23.0 (585)	25.0	.75

Each oven ships separately
Hearth Decks and Legs ship in separate cartons

ELECTRIC SUPPLY

Model	Watts	Electrical Specifications
1820	8,000	208V/60Hz/3Ph - 24A
1820-VL	8,000	208V/60Hz/3Ph - 24A
1820	8,000	208V/60Hz/1Ph - 40A
1820-VL	8,000	208V/60Hz/1Ph - 40A

SPECIFICATIONS

Model	Conveyor Dimensions		Overall Dimensions		
	Width	Length	Width inches / (mm)	Depth inches / (mm)	Height inches / (mm)
1820	18.5	48.0	33.50 (850)	48.0 (1220)	17.75 (450)
1820-VL	18.5	48.0	33.50 (850)	48.0 (1220)	17.75 (450)

MINIMUM CLEARANCES

	Non-combustible Construction		Combustible Construction	
	Inches	MM	Inches	MM
Right	5.0	127	5.0	127
Left	0	0	0	0
Rear	0	0	0	0

Continuous product improvement is a policy of Bakers Pride Oven Company. Therefore, specifications and design are subject to change without notification