



BEVERAGE-AIR

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax# 1-336-245-6453
<http://www.Beverage-Air.com>

CUSTOMER'S CHOICE FOR A HOT KITCHEN
Tested & Certified to Ambient Class of 100°F

3 Year Parts/Labor Warranty **Additional 2 Year Compressor Warranty**

SPE ELITE SERIES — MEGA TOP WITH SEE-THRU LID

Fifty percent greater pan capacity than the all around standard prep table. Features enhanced refrigeration system and new and improved grille system for better airflow and less temperature gradient. Improved design provides better airflow management and uniform temperature distribution throughout the cabinet. Pans are cooled from the bottom, eliminating the necessity of air blanket. Airflow assures that product in open containers is kept below 41°F and above freezing. This translates into increased product shelf life, higher quality food, better food appearance, fresher product and a reduction of bacteria build-up to combat food-borne illnesses.

CABINET CONSTRUCTION

Exterior construction includes heavy-duty stainless steel finish on front, sides, top, door(s) and grille. Removable hoods and insulated lid assemblies are made of matching stainless steel. Cabinet back and bottom are constructed of galvanized steel. Interior liner is made of aluminum for superior resistance to corrosion.

Doors are mounted to face of cabinet on cartridge style hinges permitting them to self close under their own weight. Hinges also allow doors to stay open 120° and permit easy door removal for service and cleaning if required. A plug in type vinyl magnetic gasket is attached to each door for positive seal. Door handle is made from extruded aluminum with a black anodized finish. It is contoured to permit easy opening of doors with fingers from both top and bottom of handle.

Cabinet insulation is CFC free foamed-in-place polyurethane of two-inch minimum thickness. Six-inch casters, 2 with brakes, are standard. Legs are available as an option.

Cutting board supplied with cabinet is 10" wide constructed of high-density white polyethylene plastic. It is readily removable for cleaning. Two epoxy-coated steel wire shelves per section are supplied as standard. Pans furnished are 4" deep and made of polycarbonate plastic.

See-Thru Lid Construction

Features 1-piece hinge with hydraulic lift. Self-closing lid features variable set points for height variations.

Note: If sides are exposed to customer, side guards are required.

REFRIGERATION

More robust refrigeration system provides added capacity and efficiency. Systems are designed using CFC free R134a refrigerant and capillary tube between condenser and evaporator. Recirculated, forced air from evaporator is moved under pans, which are recessed 2" from top of cabinet. Forced air over the condenser is drawn through grille under door as well as the back and bottom of cabinet. Automatic condensate evaporator is provided to eliminate the need of floor drains.

ELECTRICAL CONNECTION

Units pre-wired at factory and include
8' long cord and
plug set.



115/60/1
NEMA-5-15P

Item No. _____
Quantity _____

**FOOD PREPARATION
SERIES PREP TABLES**
SPE ELITE SERIES
MEGA TOP
WITH SEE-THRU GLASS LID

MODELS:
SPE36-15M-STL
SPE48-18M-STL
SPE60-24M-STL
SPE72-30M-STL



SPE48-18M-STL
(60" UNIT SHOWN WITH
SEE-THRU GLASS LID)



AVAILABLE OPTIONS:

- Overshelf-side guard kit with LED lighting
- Night covers
- Crumb catchers
- Composite cutting boards
- Dressing holder
- Shelf dividers
- Solid/tubular tray slides

Available From:



Model Specified _____

Store# _____

Location _____

Quantity _____




BEVERAGE-AIR


Food Preparation Table — Mega Top

Models: SPE Series With See-Thru Lid


MODEL	SPE36-15M-STL	SPE48-18M-STL	SPE60-24M-STL	SPE72-30M-STL
EXTERNAL DIMENSIONAL DATA				
Length Overall (inches) Length Overall (mm)	36" 914	48" 1219	60" 1524	72" 1829
Depth Overall (inches) - includes cutting board Depth Overall (mm) - includes cutting board	37 7/8" 962	37 7/8" 962	37 7/8" 962	37 7/8" 962
Height Overall— (inches) - with lid closed Height Overall— (mm) - with lid closed	37 5/8" 956	37 5/8" 956	37 5/8" 956	37 5/8" 956
Number of doors	2	2	2	3
Depth with Door Open 90 °	46 1/4"	52 1/4"	53 3/4"	53 3/4"
Clear Door Opening (inches)	13 9/16" x 21 5/8"	19 3/8" x 22"	22 1/2" x 21 1/2"	22 1/2" x 21 1/2"
INTERNAL DIMENSIONAL DATA				
NET Capacity (cubic ft.) NET Capacity (Liters)	10.2 289	13.9 394	17.1 484	21.5 609
Internal Length Overall (inches) Internal Length Overall (mm)	32" 813	44" 1118	56" 1422	68" 1727
Internal Depth Overall (inches) Internal Depth Overall (mm)	20" 508	20" 508	19 3/4" 502	19 1/4" 489
Internal Height Overall—(inches) Internal Height Overall—(mm)	18" 457	18" 457	17 5/8" 448	17 1/2" 445
Number of shelves	4	4	4	6
ELECTRICAL DATA				
Full Load Amperes 115/60/1	5	5	9.6	9.6
REFRIGERATION DATA				
Horsepower	1/4	1/4	1/3	1/3
WEIGHT DATA				
Gross Weight (Crated lbs)	320	338	397	415
Gross Weight (Crated kg)	145	153	180	188

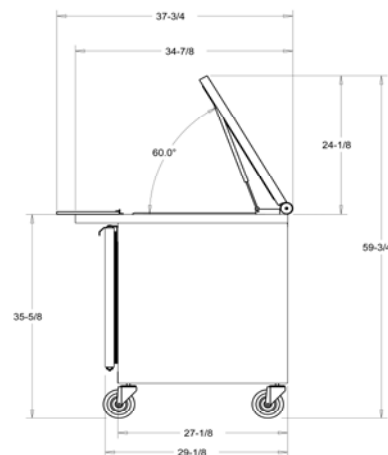

**END VIEW
WITH LID OPEN**

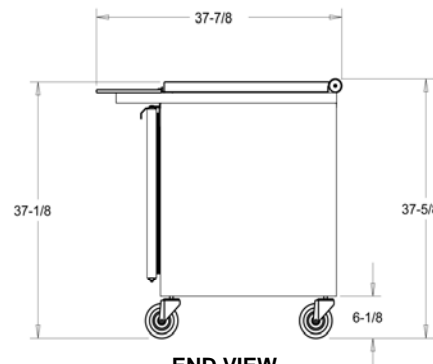


**END VIEW
WITH LID CLOSED**

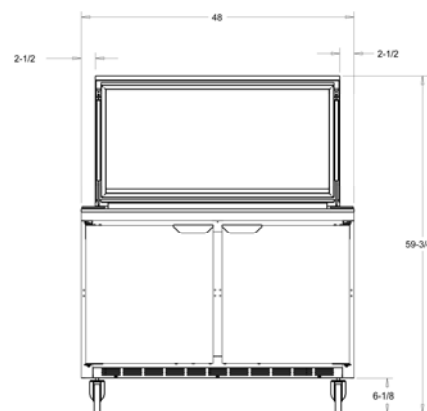

**SPE48-18M-STL
FRONT VIEW
WITH LID OPEN**



**SPE48-18M
TOP VIEW**



BEVERAGE-AIR® CORPORATION

3779 Champion Blvd. • Winston-Salem, NC 27105 USA • (336) 245-6400 • Fax (336) 245-6453 • (888) 845-9800 • www.beverage-air.com

Specifications are subject to change without prior notice. 06/13