Item # \_\_\_\_\_

Quantity\_

## Creation Express™ Mobile Cooking Station



Model 2075

### Add Efficiency And Safety To Your Demonstration Cooking

#### **Benefits**

- Flameless stoves provide safe efficient cooking
- State-of-the-art induction stoves are cool to the touch
- Mobility allows flexibility of cooking location

#### Features

- One-, two- and three-stove models available
- Built-in downdraft exhaust filtration system available
- ETL and UL listed electrical components.
- Textured and solid color laminate exterior finishes available

#### Casters

 Non-marking cushion tread 5", all-swivel, two with brake









Optional Fold-Down Shelf



Optional Filtration Unit



#### Interior Storage Shelf

#### Specifications:

Shall be Lakeside Model 20\_\_, and shall be of welded stainless steel construction, with decorative laminate exterior and hinged doors. Unit shall feature \_\_ (1, 2, or 3) drop-in style induction or infrared stoves, with cooking controls mounted above doors on the side of cabinet. Magnetic induction stove(s) shall require 120 VAC, 12.8 amp (each), with 1800 watt output, easy to read LED power level indicators, and shall be ETL listed. Infrared stove(s) shall require 120 VAC, 8.3 amp (each), with 1000 watt output, and shall be UL listed. Stoves shall include ceramic glass cooking surface, and control(s) shall feature variable cooking and holding functions. Unit top shall be of 16 gauge type 304 stainless steel, and unit sides shall be of 18 gauge stainless steel. Doors shall be of 47# high-density resin particle board with laminate finish, and shall be mounted with heavy-duty concealed, interior mounted cabinet hinges. Choice of standard laminate exterior finishes shall be included. Cabinet shall feature an 18 gauge stainless steel welded interior storage shelf. Casters shall be heavy-duty 5" all-swivel, two with brake, with rounded cushion tread non-marking tires. Casters shall be mounted to 4" wide channel style crossmembers of 14 gauge stainless steel. Unit base shall consist of 14 gauge crossmembers and channel style runners.

#### Filtration System:

Lit# CREX 0711

Shall include (1 or 2) built-in downdraft air filtration unit(s) for cooking exhaust, with intake vents mounted to the back of the cooking surface. Filtration units shall feature 3-stage exhaust filtration system, including grease/particulate, smoke/fine particle, and gas/odor removal stages. Filtration unit(s) shall be UL and ANSI listed, and shall be mounted on pull-out glide mechanism to provide easy access for filter maintenance.

M-11



Lakeside Manufacturing, Inc. 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A. 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com

Lakeside reserves the right to modify specifications or discontinue models without prior notification.


4 AIA

Spec.

#

# Creation Express™

Mobile Cooking Station

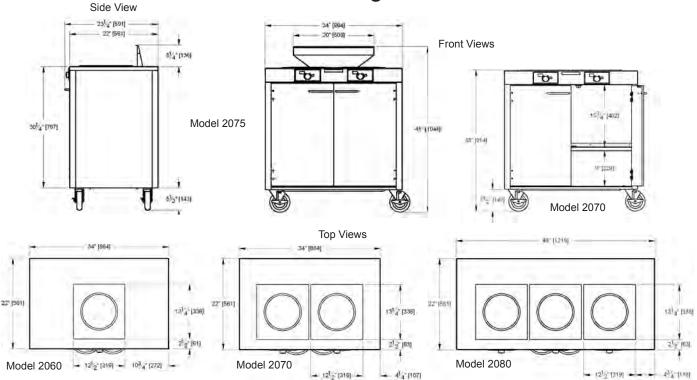

#### Product Information:

Spec. #

Model	Numb Stoves	er Of Filters	Ov W	erall Si L	ize H	Ship W Lbs	/eight Kg
2060	1 Induction	0	34" (864	22" 559	35½" 901)	110	50
2070	2 Induction	0	34" (864	22" 559	35½" 901)	120	55
2072	2 Infrared	0	34" (864	22" 559	35½" 901)	125	56
2080	3 Induction	0	48" (1219	22" 559	35½" 901)	210	96

Measurements in ( ) indicate metric millimeters, unless noted.

#### **Options:**

AIA #

- 220 VAC (2600W) induction stove(s)
- Custom laminate finish exterior: \_

Model	Number Of Stoves Filters		Overall Size W L H			Ship Weight	
	Stoves	Fillers	VV	L	п	Lbs	Kg
2065	1 Induction	1	34" (864	22" 559	40½" 1028)	154	70
2075	2 Induction	1	34" (864	22" 559	40½" 1028)	164	75
2085	3 Induction	2	48" (1219	22" 559	40½" 1028)	298	136

#### **Induction Electrical Information**

Induction models with two or three cooktops feature a power management package as standard and require 220 VAC 50 amp circuit with NEMA 14-50P plug. On units that do not include the power management package, each 120 VAC induction cooktop requires its own 20 amp circuit. Filter(s) can be included on each circuit. Induction units are available without Power Management Package.

