



SELF-CONTAINED NARROW-DOOR REFRIGERATOR

1, 2, 3 & 4 DOOR



BBSN72 shown


JOB	
AREA	
ITEM NO.	
MODEL NO.	

BBSN32	1-Door Model
BBSN52	2-Door Model
BBSN72	3-Door Model
BBSN92	4-Door Model



MODEL NUMBERS		BBSN32	BBSN52	BBSN72	BBSN92
NUMBER OF DOORS		1	2	3	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	32" (813mm)	52" (1321mm)	72" (1829mm)	92" (2337mm)
	Depth - in. (mm)	24.75" (629mm)	24.75" (629mm)	24.75" (629mm)	24.75" (629mm)
	Height - in. (mm)	34.565" (878mm)	34.565" (878mm)	34.565" (878mm)	34.565" (878mm)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	16.4375 (418mm)	36.4375" (926mm)	56.4375" (1434mm)	76.4375" (1942mm)
	Depth - in. (mm)	18.75" (476mm)	18.75" (476mm)	18.75" (476mm)	18.75" (476mm)
	Height - in. (mm)	28.5" (724mm)	28.5" (724mm)	28.5" (724mm)	28.5" (724mm)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		6.0 (170lt)	13.3 (377lt)	20.6 (583lt)	27.8 (787lt)
SHIPPING WEIGHT Lbs. (kg.)		248# (112kg)	344# (156kg)	446# (202kg)	577# (262kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	3.2	5.5	6.3	6.3
	Electrical Connection	Cord Connected	Cord Connected	Cord Connected	Cord Connected
	Cord Plug Type	NEMA 5-15	NEMA 5-15	NEMA 5-15	NEMA 5-15
	Cord Length	8'	8'	8'	8'
	Defrost Initiation	Automatic	Automatic	Automatic	Automatic
	Defrost Type	Off Cycle	Off Cycle	Off Cycle	Off Cycle
	Thermostat	Digital Control	Digital Control	Digital Control	Digital Control
	Lighting Type	LED	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/5	1/4	1/3	1/3
	Refrigerant	R134a	R134a	R134a	R134a
	Refrigerant Charge	6.5	7.0	7.0	7.0
	Factory Temperature Setting-Refrigerator	38 (3.3)	38 (3.3)	38 (3.3)	38 (3.3)
	Temperature Range-Refrigerator	33-40 (0.5-4.5)	33-40 (0.5-4.5)	33-40 (0.5-4.5)	33-40 (0.5-4.5)
	Factory Temperature Setting-White Wine	50-55 (10.0-13.0)	50-55 (10.0-13.0)	50-55 (10.0-13.0)	50-55 (10.0-13.0)
	Factory Temperature Setting-Red Wine	60-65 (15.5-18.0)	60-65 (15.5-18.0)	60-65 (15.5-18.0)	60-65 (15.5-18.0)
	Temperature Range-Wine	50-65 (10.0-18.0)	50-65 (10.0-18.0)	50-65 (10.0-18.0)	50-65 (10.0-18.0)
	Condensing Unit Location	Left Or Right	Left Or Right	Left Or Right	Left Or Right
	Expansion Device	Capillary Tube	Capillary Tube	Capillary Tube	Capillary Tube
	Pull Out Condensing Unit	Yes	Yes	Yes	Yes
	Front Vented	Yes	Yes	Yes	Yes
PLUMBING	Floor Drain Included	Yes	Yes	Yes	Yes
	Evaporator Condensate	Automatically	Automatically	Automatically	Automatically

SELF-CONTAINED NARROW-DOOR REFRIGERATOR 1, 2, 3 & 4 DOOR

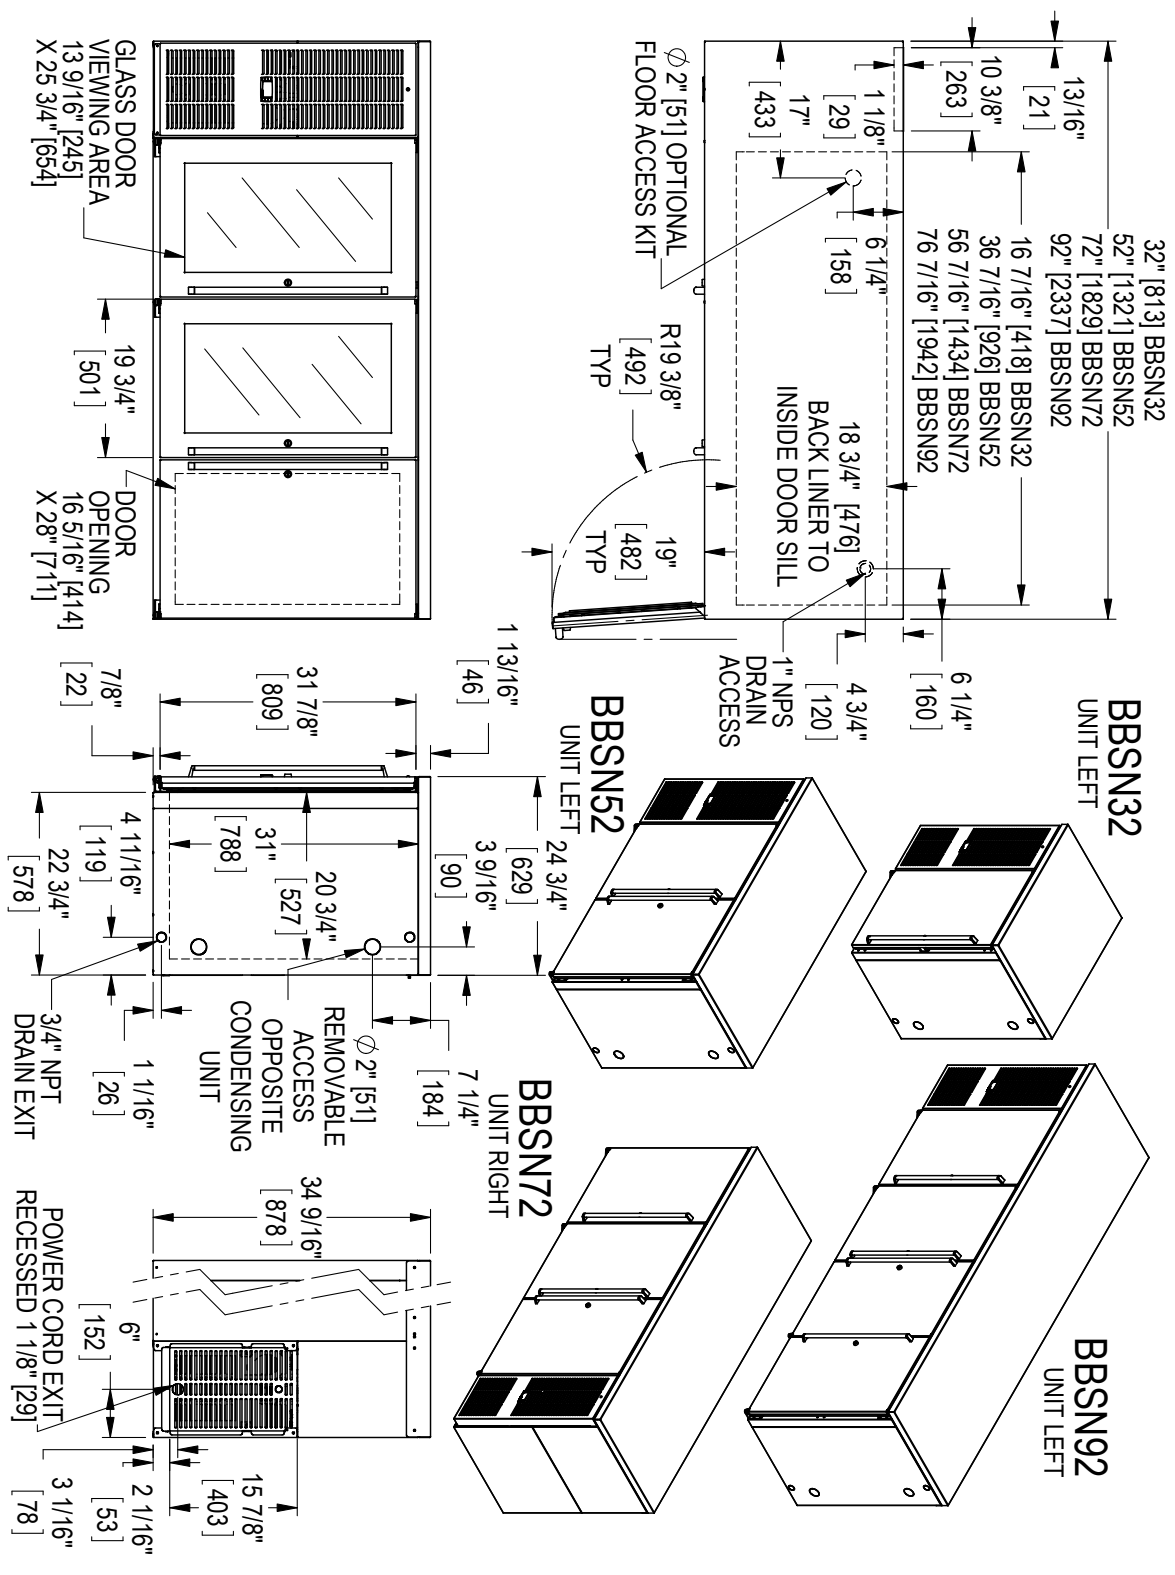

8300 West Good Hope Road, Milwaukee, WI 53223
 (800) 558-5592 • perlick.com