

Project Item Number Quantity

m

TOP DOUGH SHEETER BENCH REVERSIBLE

Univex Corporation

SFG500 B

REVERSIBLE BENCH TOP DOUGH SHEETER

Models:

SFG 500 B Bench Model





Features

- Reversible bench top dough sheeter.
- 0 to 1.9" (48mm) adjustable cylinder separation changes dough thickness.
- Hard chrome polished cylinders.
- Tables fold upright for storage and movement.
- Powerful 3/4 HP motor.
- Sheets dough onto rolling pins to allow for transport of rolled dough to work area.
- Interlock switches protect operator from injury if safety guard is opened.
- Pivoting and removable arms.
- Cord and plug.

Standard Accessories

- Heavy duty hardwood rolling pins.
- Designated area for flour while operating machine.

Warranty

One-year, on-site parts & labor warranty

WARRANTY DETAILS


The SFG500B Sheeter carries a one-year, on-site parts and labor warranty against any flaws in materials and workmanship. This period begins on the date of purchase and, provided the unit is used in accordance with our instructions, is in full effect for one year from that date. Any work performed under this warranty must be performed between the hours of 8:00 a.m. and 5:00 p.m. Monday through Friday. Univex will not pay for overtime charges for work performed other than during normal business hours. Damage incurred in transit or from installation error, accident, alteration or misuse is not covered. Univex shall not be liable for any consequential compensatory, incidental, or special damages. Contact the Univex service department for any warranty





REVERSIBLE BENCH TOP DOUGH SHEETER

SFG500 B

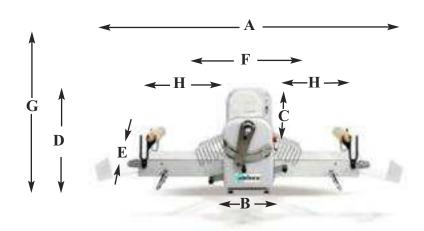

Dimensions:

SFG500 B A) Overall length: 80.1" (2035mm) B) Base length: 11.8" (300mm) C) Machine width: 37.6" (955mm) **D)** Overall height: 24.1" (612mm) 19.7" E) Belt width: (500mm) F) Length folded: 29.5" (750mm) G) Height folded: 32.5" (825mm) H) Table length (2 X) 27.6" (700mm)

Shipping Information:

Freight Class: 85

SFG500 B

Net Weight: 313lb.(142Kg) Shipping Weight: 423lb. (192Kg)

Shipping Crate Dimensions:

Height: 35.8" (910mm)
Width: 52.0" (1320mm)
Depth: 35.4" (900mm)
Cubic measure: 38ft³ (1.08M³)

Motor: 3/4 hp. Capacitor start

Electrical:

220V,60HZ,3PH,1.8A

Contact factory for additional voltages and certifications

Drive: Chain drive.

Controls: Stop and start push buttons. Manually adjustable space between rolling cylinders adjusts in increments from 0" to 1.9" (0 to 48mm).

Printed in the USA

03/10

