



TOWN



TOWN FOOD SERVICE EQUIPMENT CO., INC.
 72 BEADEL STREET, BROOKLYN, NY 11222
 Ph. (718) 388-5650 Fax (718) 388-5860
 (800) 221-5032 www.townfood.com

RICEMASTER GAS RICE COOKERS



RM-55



RM-50



GENERAL

This specification lists the standard and optional features of Town Rice Master gas rice cookers. The units are extremely reliable; simple to maintain; automatic gas rice cookers. Town Rice Master cookers can be used to cook many varied foods. A bimetallic temperature sensor mounted in the base of the rice pot provides optimum control and temperature accuracy. The rice is kept hot after cooking via the internal pilot burner. A thick wall, cast aluminum rice pot, with plated steel drop handles insures even cooking and is extremely durable. A standard Rear gas feed on all units allows for easy connection and eliminates stress on the gas valve body. A regulator is supplied with the unit. Available in Natural and Propane gas models. Available in listed and unlisted designs.

MODELS

RM-55N-R FOR NATURAL GAS &
 RM-55P-R FOR PROPANE GAS
LISTED BY ETL AND NSF, 6
 MONTH LIMITED WARRANTY

RM-50N-R FOR NATURAL GAS &
 RM-50P-R FOR PROPANE GAS
NOT LISTED WITH ETL/NSF, 6
 MONTH LIMITED WARRANTY

STANDARD FEATURES

- RM-55 models are design certified by ETL to conform to ANSI Z83.11-2007
- RM-55 models are design certified by NSF Intl. to conform to ANSI/NSF4
- Rear gas connection allows for simple connection and relieves stress on the valve.
- Bimetallic temperature sensor mounted in base of rice pot-for accurate and reliable operation; easy to clean and replace without special tools
- Heavy duty cast aluminum rice pot with steel drop handles- lifts out for cleaning or rice washing
- Piezo ignition with Pilot gas safety system




- Stainless Steel lid with durable high temperature themoset plastic handle
- 6 month limited warranty on all gas units
- Pilot burner keeps rice hot for serving after cook cycle is completed
- Fool Proof Pushbutton operation- two buttons control entire cook cycle.
- Rapid production times- 22 minutes for Natural gas, 27 minutes for Propane gas

OPTIONS

- There are currently no options available for these units.

Model	Type	Wt.
RM-50N-R	55 cup, Natural Gas w/ rear connection	46lb
RM-50P-R	55 cup, Propane Gas w/rear connection	
56853	55 cup replacement rice pot	15lb
RM-55N-RC KIT	55 cup Rear Connection Kit, Natural Gas	2lb
RM-55P-RC KIT	55 cup Rear Connection Kit, Propane Gas	

Model	Type	Wt.
RM-55N-R	55 cups, NSF/ETL Natural Gas w/ rear connection	46lb
RM-55P-R	55 cups, NSF/ETL Propane Gas w/rear connection	
56853	55 cup replacement rice pot	15lb
RM-55N-RC KIT	55 cup Rear Connection Kit, Natural Gas	2lb
RM-55P-RC KIT	55 cup Rear Connection Kit, Propane Gas	

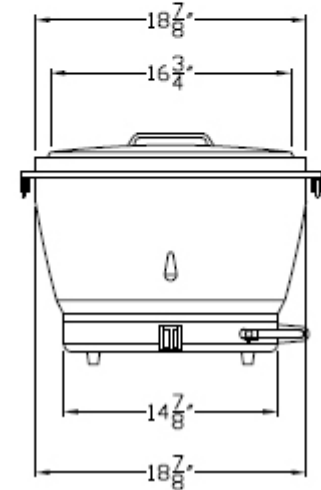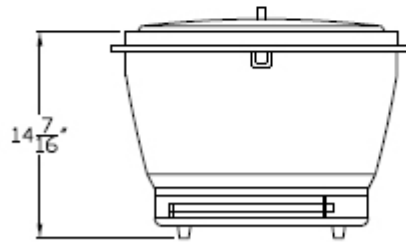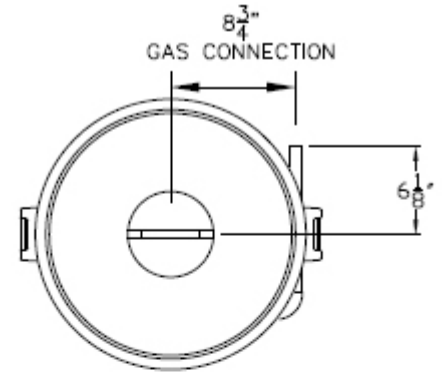

no.	description	gas	Btu	cook time	capacities*		sizes diam x height
					raw rice	cooked rice	
RM-50N-R	55 cup, economy	natural	34,600	22 min	18 lb (55cups)	43 lb (110 cups)	22" x 17"
RM-50P-R	55 cup, economy	propane	27,300	27 min			
RM-55N-R	55 cup, NSF/ETL	natural	34,600	22 min			
RM-55P-R	55 cup, NSF/ETL	propane	27,300	27 min			
connection	liquid capacity	carton size	cu ft	pack	ship wt		
3/4" NPTM	24 qts.	21" x 21" x 18"	4.4	1	46 lb		

*Capacities are approximate.

IMPORTANT

Commercial gas appliance(s) must be installed in accordance with state and local codes, or in the absence of local code with the NATIONAL FUEL GAS CODE- ANSI Z223.1. COMPLIANCE WITH ALL CODES IS THE RESPONSIBILITY OF THE OWNER AND THE INSTALLER.

COMMERCIAL GAS UNITS NEED ADEQUATE VENTILATION SYSTEMS. REFER TO NATIONAL FIRE PROTECTION ASSOCIATION STANDARD NO 96- "VAPOR REMOVAL FROM COOKING EQUIPMENT"

CERTIFIED BY ETL TO CONFORM TO ANSI Z83.11- "GAS FOODSERVICE EQUIPMENT."
NOT INTENDED FOR HOUSEHOLD USE. FOR USE BY PROFESSIONAL TRAINED PERSONNEL ONLY.

CERTIFIED BY ETL/NSF TO NSF4/ANSI-4-COMMERCIAL COOKING, RETHERMALIZATION AND HOT FOOD EQUIPMENT- "SANITATION."

MINIMUM CLEARANCES- COMBUSTIBLE AND NON COMBUSTIBLE:

Back Wall- 6" Left and Right Sides- 6" For use on non combustible floors or table surfaces only.

Town reserves the right to change design without notification.