

HSM-38/3S

HEATED SHELF MERCHANDISER



- Three-shelf merchandiser incorporates thermal kinetic glass technology to provide three evenly heated display surfaces.
- Packaged foods are held at safe temperatures to offer quality holding on each of the three independently controlled shelves.
- Low wattage fluorescent lighting at the top of each shelf enhances the display while the glass shelves provide the low power usage of kinetic energy.
- Vertical display maximizes packaged product capacity in a small linear footprint while the glass side panels offer greater product visibility from both sides of each illuminated shelf.

The multi-shelf merchandiser includes heavy-duty, non-magnetic stainless steel construction throughout. Each of the three (3) shelves are controlled by one (1) adjustable thermostat with a range of 0 to 10, and includes one (1) heat-on indicator light. The controls are protected by a sliding panel on the front of the merchandiser. Two (2) shelves are angled at 8° for visibility, and include one (1) warm-light fluorescent above each shelf. The bottom shelf is flat. Front mounted heat-guards provide customer protection. Solar cool, bronze side glass reflects heat back into the product area and mirrors the display to enhance the merchandising effect. Stainless steel front panel and black laminate end panels are standard.

☐ **MODEL HSM-38/3S:** Three-tier, self-service merchandiser, 38" (964mm) width

FACTORY INSTALLED OPTIONS

- Electrical Choices
 - ➔ Specify Voltage:
 - ☐ 208-240
 - ☐ 230
- Reach-in merchandiser is standard.
 - ☐ Specify pass-through design as a special order.
- Front Panel
 - ➔ Specify color choice:
 - ☐ Stainless Steel, standard
 - ☐ Black, optional
 - ☐ Burgundy, optional




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com



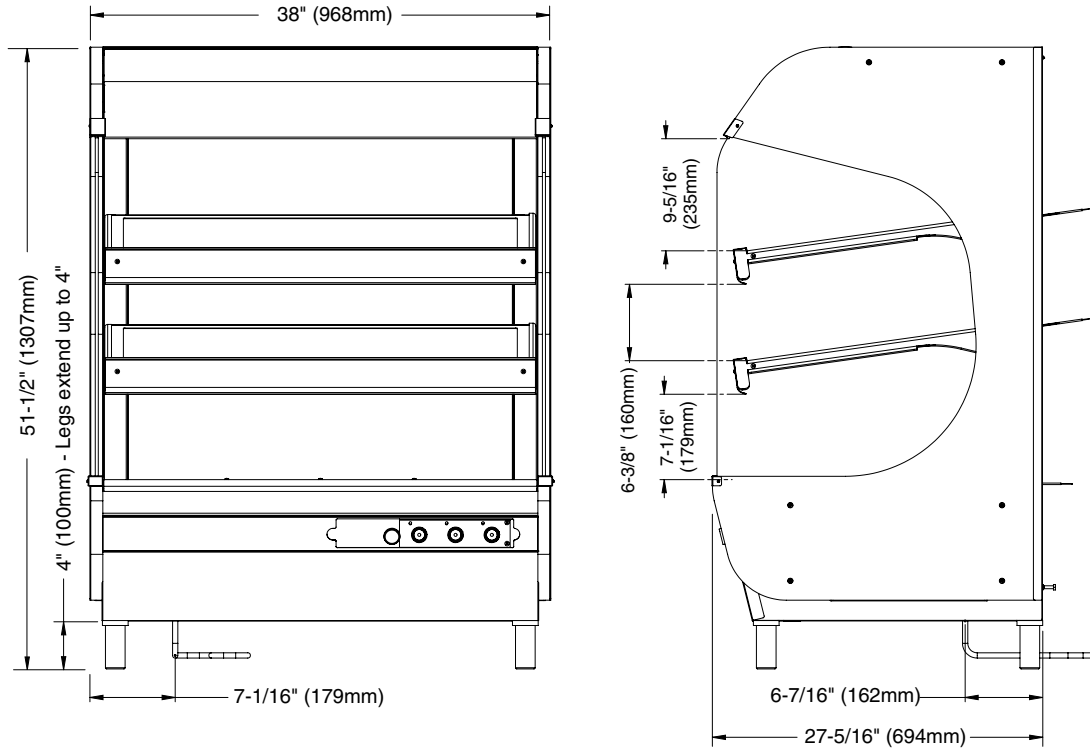

EXTERIOR DIMENSIONS: H x W x D

51-1/2" x 38" x 27-5/16"
(1307mm x 968mm x 694mm)

SHELF DIMENSIONS: W x D

Top two shelves: 32-7/8" x 20" (835mm x 508mm)
– spaced at 7-3/8" (187mm) centers
Bottom shelf: 33-3/8" x 23" (848mm x 584mm)
– spaced at 7-7/8" (200mm) centers

INSTALLATION REQUIREMENTS


Unit must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions. In order to maintain NSF standards, stationary models must be sealed at bottom by NSF approved sealant, or equipped with casters, or 4" (102mm) legs for counter top applications.

OPTIONS & ACCESSORIES

Base Stand

<input type="checkbox"/> Stainless Steel	5004919
<input type="checkbox"/> Black	5004920
<input type="checkbox"/> Burgundy	5002703

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD, NO PLUG
208-240 (AGCY)	1	60	10	5.7	 NEMA 6-20P 20A-250V RECOMMENDED
at 208	1	60	10.8	2.3	
at 240	1	60	12.5	3.0	
MUST BE ON IT'S OWN 20AMP CIRCUIT					
230	1	50	11.8	2.7	CORD, NO PLUG

PRODUCT CAPACITY

72 lb (33 kg) MAXIMUM
24 lb (11 kg) MAXIMUM PER SHELF

EACH SHELF

Eight (8) chicken boats with dome cover

WEIGHT

NET	335 lb (152 kg)
SHIP	595 lb (270 kg)
CRATE DIMENSIONS: (L x W x H)	
36" x 46" x 65" (914mm x 1168mm x 1651mm)	

CLEARANCE REQUIREMENTS

4" (102mm) at back of unit