

HSM-48/5S

HEATED SHELF MERCHANDISER



• Five-shelf merchandiser incorporates thermal kinetic glass technology to provide five evenly heated display surfaces.

- Packaged foods are held at safe temperatures to offer quality holding on each of the five independently controlled shelves.
- Low wattage fluorescent lighting at the top of each shelf enhances the display while the glass shelves provide the low power usage of kinetic energy.
- Vertical display maximizes packaged product capacity in a small linear footprint while the glass side panels offer greater product visibility from both sides of each illuminated shelf.

The multi-shelf merchandiser includes heavy-duty, non-magnetic stainless steel construction throughout. Each of the five (5) shelves are controlled by one (1) adjustable thermostat with a range of 0 to 10, and includes one (1) heat-on indicator light. The controls are protected by a sliding panel on the front of the merchandiser. Four (4) shelves are angled at 8° for visibility, and include two (2) warm-light fluorescents above each shelf. The bottom shelf is flat. Front mounted heat-guards provide customer protection. Solar cool, bronze side glass reflects heat back into the product area and mirrors the display to enhance the merchandising effect. Four (4) heavy duty 3" (76mm) swivel-with-brake casters are included. Stainless steel front panel and black laminate end panels are standard.

MODEL HSM-48/5S: Five-tier, self-service merchandiser, 48" (1219mm) width

FACTORY INSTALLED OPTIONS

- Electrical Choices
 - ➔ Specify Voltage:
 - 208-240
 - 380-415
- Reach-in merchandiser is standard.
 - ➔ Specify pass-through design as a special order.

ADDITIONAL FEATURES & OPTIONS

- Front Panel
 - ➔ Specify color choice:
 - Stainless Steel, standard - 5011020
 - Black, optional - 5011019
 - Burgundy, optional - 5011016



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.



PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com




HSM-48/5S

HEATED SHELF MERCHANDISER

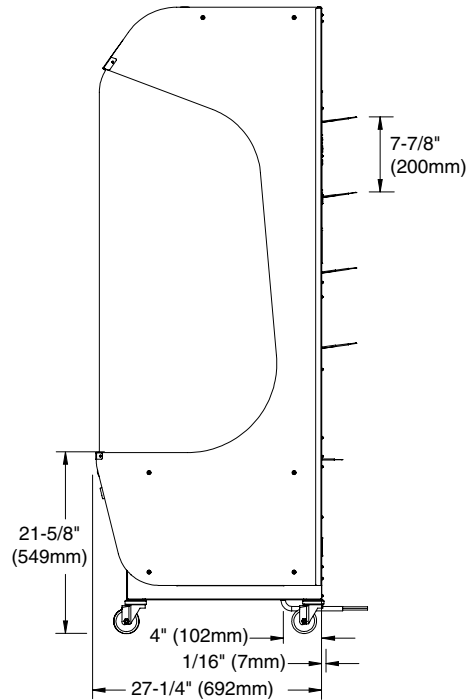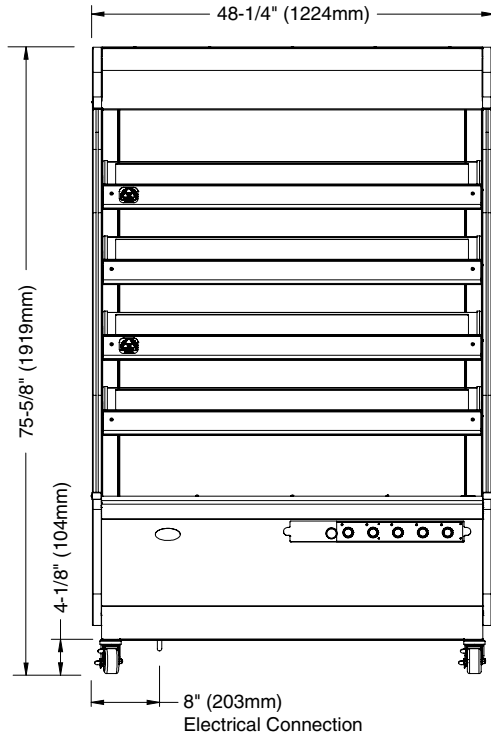

EXTERIOR DIMENSIONS: H x W x D
75-5/8" x 48-1/4" x 27-1/4" (1919mm x 1226mm x 692mm)
SHELF DIMENSIONS: W x D
Top four shelves: 45-1/2" x 20" (1156mm x 508mm)
Bottom shelf: 46" x 23" (1168mm x 584mm)
- spaced at 6-1/4" (159mm) centers

ELECTRICAL						
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW		CORD, NO PLUG
208-240 (AGCY)	1	60	24	5.7		NEMA L6-30P
at 208	1	60	20.6	4.3		30A-250V
at 240	1	60	24	5.7		RECOMMENDED
<i>MUST BE ON ITS OWN 30 AMP CIRCUIT</i>						
380-415	3	50	10	5.7		CORD, NO PLUG

INSTALLATION REQUIREMENTS
Unit must be installed level. It must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions. In order to maintain NSF standards, floor models must be sealed at bottom by NSF approved sealant, or equipped with casters, or 6" (152mm) legs.

PRODUCT CAPACITY
150 lb (68 kg) MAXIMUM
30 lb (13 kg) MAXIMUM PER SHELF
EACH SHELF
Ten (10) chicken boats with dome cover

CLEARANCE REQUIREMENTS
4" (102mm) at back of unit

WEIGHT
NET 540 lb (245 kg)
SHIP 755 lb (345 kg)
CRATE DIMENSIONS: (L x W x H)
45" x 52" x 87" (1143mm x 1321mm x 2210mm)

OPTIONS & ACCESSORIES
<input type="checkbox"/> Legs, 6" (152mm) 5205