

CUSTOMER'S CHOICE FOR A HOT KITCHEN Tested & Certified to Ambient Class of 100°F

http://www.Beverage-Air.com

3 Year Parts/Labor Warranty Additional 2 Year Compressor Warranty

UCR-SERIES UNDERCOUNTER UNITS

Versatile, compact (29" deep) models for undercounter and worktop applications for refrigerated storage of food product. Height is 34-1/2".

CABINET CONSTRUCTION

Heavy duty construction includes exterior stainless steel on front, sides, door(s) and grille. Cabinet back and bottom are galvanized steel. Interior liner is made of corrosion resistant aluminum. Interior thermometer is standard.

Cabinets are insulated with 2" thick foamed-in-place polyurethane insulation. Sub-top insulated with 1-1/2" foamed-in-place polyurethane insulation. Doors are mounted to cabinet on selfclosing, cartridge style hinges with 120° stay open feature. Doors are equipped with a snap-in-place vinyl magnetic gasket for positive seal. Convenient, double pull style door handle is made of black anodized aluminum. 6" high casters are standard, 2 include brakes. An 8' cord set is provided with 115 volt models. Cabinet interior standard with 2 steel wire epoxy coated shelves per section. Interior light with manual switch is provided with glass door models.

REFRIGERATION

Refrigeration system utilizes R134a refrigerant governed by a capillary tube system. Automatic (non-electric) condensate evaporator is provided. Interior forced-air system with high humidity evaporator coils, provides the ideal environment for food preservation.


ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.

SPECIAL FEATURES

- Cartridge style door hinges provides positive seal & eliminates door sagging issues (excludes glass door and some special units).
- Optional 6" legs or 3" casters available





29" DEPTH UNDERCOUNTER REFRIGERATOR **FOOD PREPARATION SERIES** MODELS: UCR27A UCR48A UCR60A UCR72A



UCR27



UCR48

ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.













Available From:

Model Specified	Store#
Location	Quantity



Standard Undercounter Refrigerator Cabinet

Models: UCR27A / UCR48A / UCR60A / UCR72A

MODEL	UCR27A	UCR48A	UCR60A	UCR72A
EXTERNAL DIMENSIONAL DATA				
Length Overall (inches) Length Overall (mm)	27" 686	48" 1219	60" 1524	72" 1829
Depth Overall (inches) - Less handle Depth Overall (mm) - Less handle	29 1/4" 743	29 1/4" 743	29 1/4" 743	29 1/4" 743
Height Overall— on 6" casters (inches) Height Overall—on 6" casters (mm)	34 1/2" 876	34 1/2" 876	34 1/2" 876	34 1/2" 876
Depth with Door Open 90 °	51 5/8"	50 5/8"	55 1/4"	52
Clear Door Opening (inches)	22 1/2" x 21 1/2"	19 1/2" x 21 1/2"	22 1/2" x 21 1/2"	19 1/2" x 21 1/2"
Number of doors	1	2	2	3
INTERNAL DIMENSIONAL DATA				
NET Capacity (cubic ft.) NET Capacity (Liters)	7.3 207	13.9 394	17.1 484	21.5 609
Internal Length Overall (inches) Internal Length Overall (mm)	23" 584	44" 1118	56" 1422	68" 1727
Internal Depth Overall (inches) Internal Depth Overall (mm)	18" 457	17" 432	19 3/4" 502	19 3/4" 502
Internal Height Overall (inches) Internal Height Overall (mm)	23" 584	23" 584	23" 584	22 3/4" 578
Number of shelves	2	4	4	6
ELECTRICAL DATA				
Full Load Amperes 115/60/1	4.0	3.3	8.2	8.2
ENERGY CONSUMPTION (KWH)	2.23	2.62	3.5	4.1
REFRIGERATION DATA				
Horsepower	1/6	1/5	1/4	1/4
WEIGHT DATA			_	
Gross Weight (Crated lbs)	158	225	266	305
Gross Weight (Crated kg)	72	102	121	138

(ÎL)











PLAN VIEWS




UCR27 TOP UCR27 FRONT






UCR48 FRONT



UCR60 TOP

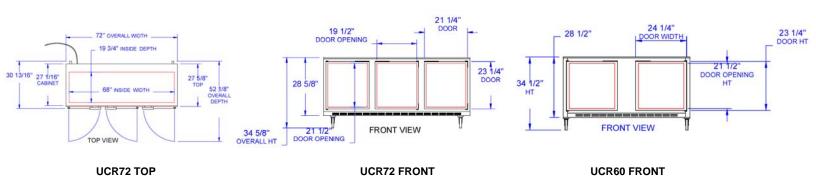

BEVERAGE-AIR® CORPORATION