BACK BAR COOLER

Model: BBC59-SS-SGD-PT

59" Back Bar Display Cooler with Sliding Glass Doors, Pass-Thru

Stainless steel exterior and countertop, heavy-duty galvanized steel interior with reinforced stainless steel floor.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)				
Casters or legs	Remote models			
Sliding glass door lock	Condensing unit on right			
Additional epoxy-coated shelves with clips	Wine rack			
Stainless steel shelves with clips	Shallow depth			
Expansion valve system	Food storage rated stainless steel interior (NSF-7)			
Automatic, electric condensate evaporator				



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Environmentally-safe R-134a refrigerant

Performance-rated, front breathing refrigeration system

Automatic, energy-saving, non-electric condensate evaporator

Full length, extra large coil

CABINET ARCHITECTURE

High density, non-CFC polyurethane foamed-in-place insulation Double pane, tempered Low-e sliding glass doors Heavy-duty epoxy-coated steel shelves Reinforced threshold

MODEL FEATURES

Easily accessible and serviceable slide-out condensing unit Front, rear and side venting louvered grills LED interior lighting


APPROVAL:


Model Specifications

Model Plan Views


D18	A				-	
DIN		ISII	IIN	AL		IA
-					-	

DIMENSIONAL DATA			
Net Capacity (cu. ft.)	22 (623 cu l)		
Width, Overall (in.)	59 (1499 mm)		
Depth, Overall (in.) (incl. top & bumpers)	29 (737 mm)		
Depth, Body Only (in.)	25 (635 mm)		
Height, Overall (in.)	36 3/4 (933 mm)		
Barrel Capacity (# barrel type kegs)	2		
Straight Wall Capacity (# straight wall kegs)	3		
No. of Doors	4		
No. of Shelves	4		
REFRIGERANT DATA			
Condensing Unit Size (H.P.)	1/3		
Capacity (BTU/Hr)*	2025		
ELECTRICAL DATA			
Voltage (int'l)	115/60/1 (220/50/1)		
Feed Wires (incl. ground)	3		
Total Amps (int'l)	7.0 (5.1)		
10 ft. Cord/Plug [attached] (int'l)	Yes (No)		
SHIPPING DATA			
Weight (lbs.)	435 (197 kg)		
Height - Crated (in.)	46 (1168 mm)		
Width - Crated (in.)	67 1/4 (1708 mm)		
Depth - Crated (in.)	30 1/4 (768 mm)		
* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.			

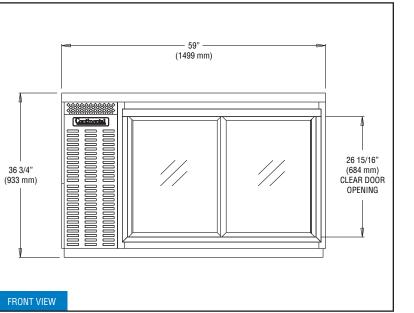

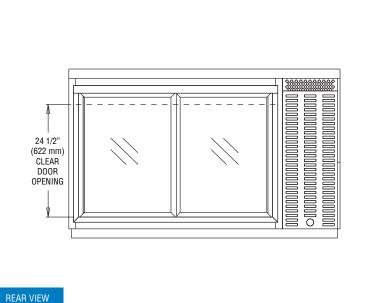

SIDE VIEW



whole unit.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

29" (737 mm) 31" (787 mm) 25 13/16" (787 mm) 25" (635 mm)