BASE MODEL REFRIGERATOR

Model: CRA118

118" Worktop Refrigerator with Solid Doors

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior.

Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)	
Drawers in lieu of doors	Condensing unit left or right
Drawer section above the condensing unit*	Stainless steel pan slides
Additional epoxy-coated steel shelves	Remote models
Stainless steel shelves	Door locks
Automatic, electric condensate evaporator	Adjustable legs
Exterior dial or digital thermometer	Front breathing
Stainless steel back and interior	

*Drawer section above condensing unit holds (1) 12 × 20 × 6 pan <u>NOTE</u>: 118" overshelves, not available



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system

Environmentally-safe R-134a refrigerant

Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

Automatic, energy saving, non-electric condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, slide-out condensing unit

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
5" casters
Completely enclosed, vented and removable rear and side grills
Refrigerated door section above the condensing unit

MODEL FEATURES


Expansion valve for quick recovery
Built-in, off cycle defrost timer
Interior hanging thermometer
Field rehingeable doors


<u>NOTE</u>: CRA models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

Model Specifications


DIMENSIONAL DATA 44 (1246 cu l) Net Capacity (cu. ft.) 118 (2997 mm) Width, Overall (in.) Depth, Overall (in.) 36 1/16 (916 mm) (incl. handles & bumpers) 35 (889 mm) Height, Overall (in.) (incl. 5" casters) Shelf Area (sq. ft.) 18.4 (1.7 sq m) No. of Shelves 8 No. of Full Doors 4 No. of Half Doors 1 Interior Depth (in.) 30 (762 mm) Interior Height (in.) 26 (660 mm) Interior Height (in.) (above condenser) 12 1/2 (318 mm) Interior Width (in.) 114 (2896 mm) **REFRIGERANT DATA** Condensing Unit Size (H.P.) 3/4 Capacity (BTU/Hr)* 5600 **ELECTRICAL DATA** 115/60/1 (220/50/1) Voltage (int'l) 6 Fans Total Amps (int'l) 15.2 (n/a) 10 ft. Cord/Plug [attached] (int'l) Yes (No) **SHIPPING DATA** Weight (lbs.) 705 (320 kg) Height - Crated (in.) 43 3/4 (1111 mm) Width - Crated (in.) 120 (3048 mm) Depth - Crated (in.) 47 (1194 mm)

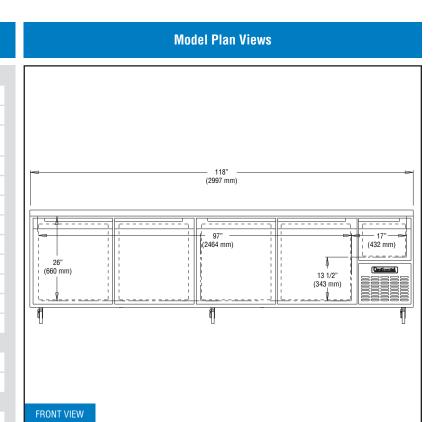

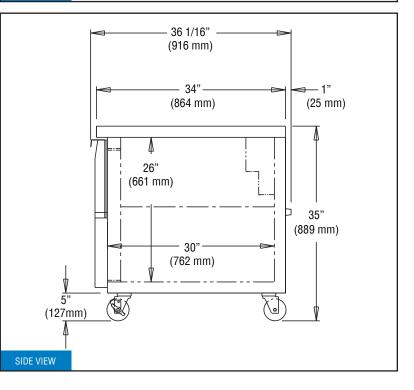

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.





© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.