BASE MODEL SANDWICH UNITS

Model: CRA68-12M-D

68" Mighty Top Base Model Sandwich Unit Refrigerator with Drawers - 12 Pans

Heavy gauge #300 Series stainless steel top, stainless steel front and end panels, galvanized steel rear and grill and aluminum interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)	
Doors in lieu of drawers	Expansion valve system
Drawer section above the condensing unit*	Flat insulated night cover
Overshelves (single or double)	Remote models
Condensing unit left or right	Door/drawer locks
Automatic, electric condensate evaporator	Adjustable legs
Exterior dial or digital thermometer	Crumb catcher
Rear-mounted cutting board	Front breathing
Stainless steel back and interior	

*Drawer section above condensing unit holds (1) 12 x 20 x 6 pan



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, slide-out condensing unit

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Spring loaded, self closing door (over condensing unit)
Magnetic snap-in door/drawer gaskets
Stainless steel roll-out drawers
10" deep, full length nylon cutting board
Insulated lid
5" casters
Completely enclosed, vented and removable rear and side grills
Refrigerated door section above the condensing unit

MODEL FEATURES

(12) 1/6 size non-recessed pans, 4" deep

Interior hanging thermometer

Field rehingeable door

<u>NOTE</u>: CRA-D models come standard with a door over the condensing unit. A drawer over the condensing unit is an option.

APPROVAL:

Model Specifications

Model Plan Views

DIMENSIONAL DATA

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	22 (623 cu l)
1/6 Size Pans (4" deep)	12
Width, Overall (in.)	68 (1727 mm))
Depth, Overall (in.) (incl. handles & bumpers)	36 1/16 (916 mm)
Depth, Cutting Board (in.)	10 (254 mm)
Height, Overall (in.) (incl. 5" casters)	42 (1067 mm)
No. of Drawers	4
No. of Half Doors	1
Interior Depth (in.) (above condenser)	30 (762 mm)
Interior Height (in.) (above condenser)	12 1/2 (318 mm)
Interior Width (in.) (above condenser)	17 (432 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/3
Capacity (BTU/Hr)*	2610
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	3
Total Amps (int'l)	6.7 (5.0)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	490 (222 kg)
Height - Crated (in.)	43 3/4 (1111 mm)
Width - Crated (in.)	70 (1778 mm)
Depth - Crated (in.)	47 (1194 mm)

DRAWER PAN CONFIGURATIONS

Two Tier: (1) $12 \times 20 \times 6$ pan & (3) $1/6 \times 6$ pans (top) (2) $12 \times 20 \times 6$ pans (bottom). Three tier not available.

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.








 68"


 (1727 mm)

 39 3/8"

 (1000 mm)

FRONT VIEW

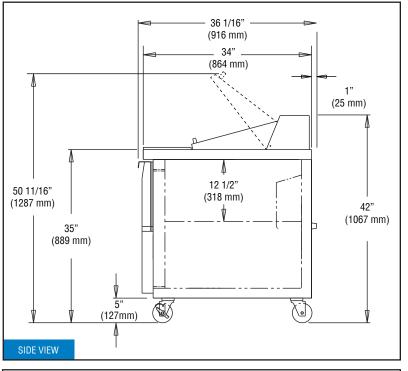

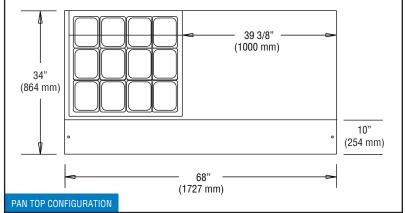

© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.