# SANDWICH UNIT REFRIGERATOR

# Model: SW36-12M

# 36" Mighty Top Sandwich Unit Refrigerator with Solid Doors - 12 Pans

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



## **Options and Accessories**

(upcharge and lead times may apply)		
Stainless steel exterior and interior - SS models	Expansion valve system	
Stainless steel end panels - SA models	Rear-mounted cutting board	
Glass doors in lieu of solid doors - GD models	Flat insulated night cover	
Stainless steel finished back in lieu of aluminum	Remote models	
Overshelves (single or double)	Door locks	
Stainless steel shelves	Adjustable legs	
Additional epoxy-coated steel shelves	Digital thermometer	
Automatic, electric condensate evaporator	Crumb catcher	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

# **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation
Spring loaded, self closing doors
Magnetic snap-in door gaskets
Heavy-duty, epoxy-coated steel shelves
10" deep, full length nylon cutting board
Insulated lid
5" casters
Completely enclosed, vented and removable case back

#### **MODEL FEATURES**

(12) 1/6 size non-recessed pans, 4" deep
Interior hanging thermometer
Field rehingeable doors

**APPROVAL:** 

### **Model Specifications**

### **Model Plan Views**


DIMENSIONAL DATA	
Net Capacity (cu. ft.)	10.3 (292 cu l)
1/6 Size Pans (4" deep)	12
Width, Overall (in.)	36 (914 mm)
Depth, Overall (in.) (incl. handles & bumpers)	35 (889 mm)
Depth, Body Only (less doors) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	10 (254 mm)
Height, Overall (in.) (incl. 5" casters)	42 1/4 (1073 mm)
Shelf Area (sq. ft.)	4.6 (.4 sq m)
No. of Shelves	2
No. of Doors	2
Interior Depth (in.)	19 3/8 (492 mm)
Interior Height (in.)	26 1/4 (667 mm)
Interior Width (in.)	32 (813 mm)
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/5
Capacity (BTU/Hr)*	1620
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	2
Total Amps (int'l)	6.3 (3.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	250 (113 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	43 (1092 mm)
Depth - Crated (in.)	46 (1168 mm)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com








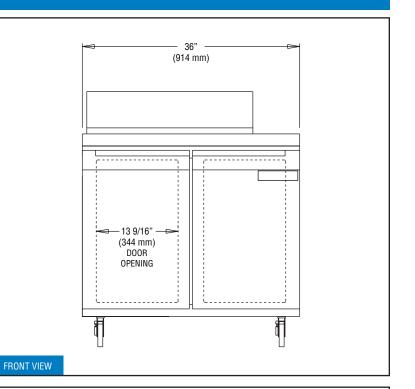

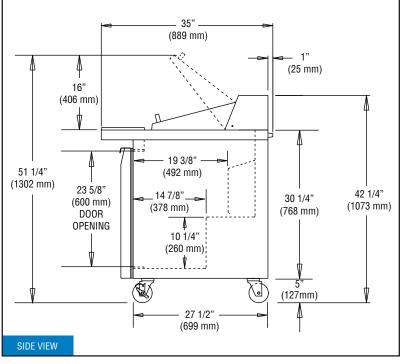

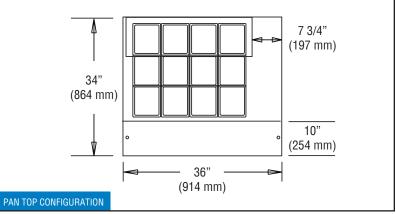

© Copyright 2014. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.