# SANDWICH UNIT REFRIGERATOR

## Model: SW72-18C-D

## 72" Cutting Top Sandwich Unit Refrigerator with Drawers - 18 Pans

Stainless steel front and top, aluminum end panels, case back and interior. Certified under NSF-7 to maintain temperatures in 86°F ambient and designed to maintain NSF-7 temperatures in 100°F ambient.



## **Options and Accessories**

(upcharge and lead times may apply)		
Stainless steel exterior and interior - SS models	Expansion valve system	
Stainless steel end panels - SA models	Rear-mounted cutting board	
Glass doors in lieu of drawers - GD models	Flat insulated night covers	
Stainless steel finished back in lieu of aluminum	Remote models	
Solid doors in lieu of drawers	Drawer locks	
Overshelves (single or double)	Adjustable legs	
Automatic, electric condensate evaporator	Three tier drawers	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Performance-rated refrigeration system
Environmentally-safe R-134a refrigerant
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, energy saving, non-electric condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

## **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation
Magnetic snap-in drawer gaskets
19" deep, full length nylon cutting board
Stainless steel roll-out drawers
Insulated lids
5" casters
Completely enclosed, vented and removable case back

## **MODEL FEATURES**

(18) 1/6 size non-recessed pans, 4" deep
Interior hanging thermometer

APPROVAL:

#### **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	20.6 (583 cu l)
1/6 Size Pans (4" deep)	18
Width, Overall (in.)	72 (1829 mm)
Depth, Overall (in.) (incl. cutting board & bumpers)	38 1/4 (972 mm)
Depth, Body Only (less drawers) (in.)	27 1/2 (699 mm)
Depth, Cutting Board (in.)	19 (483 mm)
Height, Overall (in.) (incl. 5" casters)	42 1/4 (1073 mm)
No. of Drawers (two tier)	6
No. of Drawers (three tier)	9
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/4
Capacity (BTU/Hr)*	1940
ELECTRICAL DATA	
Voltage (int'l)	115/60/1 (220/50/1)
Fans	4
Total Amps (int'l)	7.6 (4.7)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)
SHIPPING DATA	
Weight (lbs.)	398 (181 kg)
Height - Crated (in.)	43 1/4 (1099 mm)
Width - Crated (in.)	80 1/4 (2038 mm)
Depth - Crated (in.)	46 (1168 mm)

## **DRAWER PAN CONFIGURATIONS**


Two Tier: (1) 12 x 18 x 6 pan per drawer or (1) 1/2 size x 6 & (1) 1/3 size x 6 pans per drawer


Three Tier: (1) 12 x 18 x 3 1/2 pan per drawer or (1) 1/2 size x 4 & (1) 1/3 size x 4 pans per drawer

\* Rating @ +25°F evaporator, 90°F ambient


Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





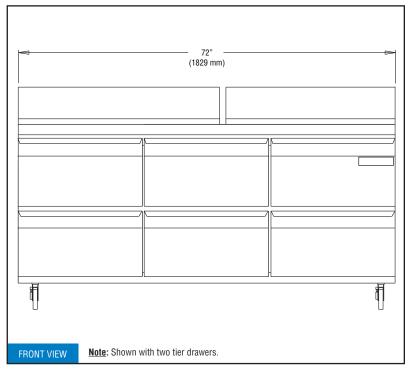


**Model Plan Views** 

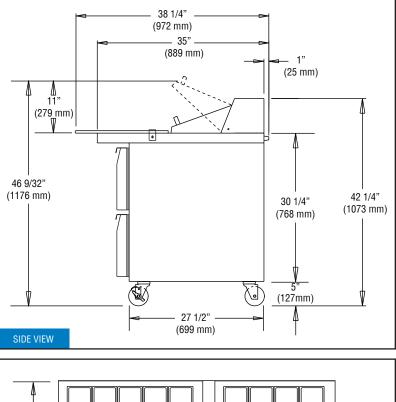

NSF CE



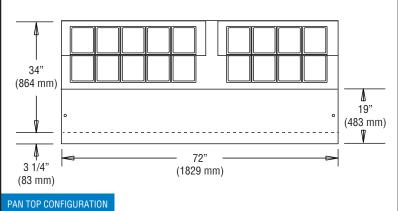

© Copyright 2013. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.