


Encore® Deck Mount Pot Filler
KL73-3x00-xx Series

KL73-3000 No vacuum breaker
 KL73-3000-VB With vacuum breaker



KL73-3000-VB Shown

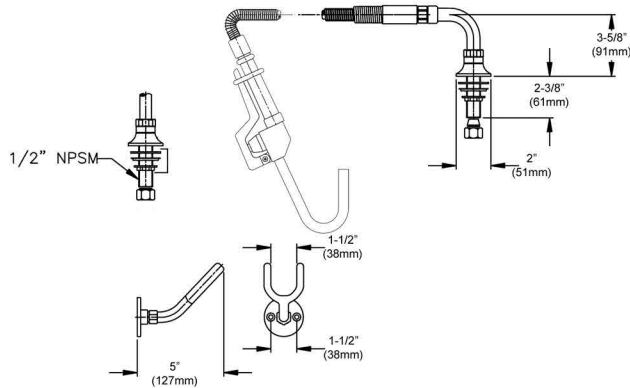

Dimensions shown in inches (mm) are for reference only and are subject to change.

1-1/8" (29mm) hole is recommended to accommodate 1/2" supply nipple.
 1/2" NPT female inlet
 Operating Temperature: 40-180°F (5-83°C)
 Operating Pressure: 15-125psi

Approximate shipping weight - 5 lbs
 Warranty - 2 years parts

Solid heavy duty cast body is specification and commercial quality

Commercial Quality Features

- Pot filler valve
- 72" flexible S/S hose with Kool Grip™ handle

SANIGUARD® Product Protection

- Permanently incorporated on all touch points of Encore plumbing fixtures
- Inorganic, silver ion technology inhibits growth of common bacteria, yeasts, mold and fungi, minimizes cross-contamination

SPECIFICATIONS:

Deck Mount Pot Filler to be Encore KL73-3000 Series in the following configuration:

___ KL73-3000 No vacuum breaker
 ___ KL73-3000-VB With vacuum breaker

Faucet body to be constructed of polished chrome plated brass with total lead content less than 0.25% by weighted average. Hose to be 72" flexible stainless steel with Kool Grip™ handle. Hose to have Santoprene® reinforced inner hose. Hold open ring and hose wall hook to be included. Grip to be incorporated with SANIGUARD treatment.

COMPLIES WITH:
 THE FEDERAL "REDUCTION OF LEAD IN DRINKING WATER ACT" - 2011 - US SENATE BILL NO. S.3874
 NSF/ANSI 61/9, ANNEX G

