



# Thermocouple Probes *Cooper*

**Model 1052MK**  
Needle probe

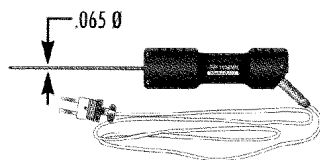


**Model 1075MK**  
Puncture probe,  
semi-pointed tip,  
high temperature

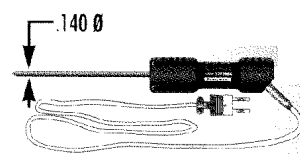


<b>MODELS: 1052MK, 1070MK, 1075MK, 4022MK, 5000MK, 6010MK, 6030MK, 6050MK</b>	
<b>Specifications: 1052MK/1070MK/1075MK/5000MK/6010MK</b>	
Temperature Range	-100° to 900°F/-73° to 482°C
Max. Tip Temperature	900°F/482°C
Max. Cord Temperature	221°F/105°C, except 1070MK and 6010MK 900°F/482°C
Response Time	<b>1052MK</b> - 3 seconds <b>1070MK</b> - 30 seconds <b>1075MK</b> - 30 seconds <b>5000MK</b> - 20 seconds <b>6010MK</b> - 2 seconds
Probe Type	Type K thermocouple
Shaft Length	<b>1052MK</b> - 4" <b>1070MK</b> - 3.5" <b>1075MK</b> - 3.5" <b>5000MK</b> - 4.13"
Cord Length	<b>1052MK</b> - 36" PVC straight cord <b>1070MK</b> - 36" glass braid <b>1075MK</b> - 36" glass braid <b>5000MK</b> - 42" PVC wire <b>6010MK</b> - 48" stainless steel overbraid
<b>Specifications: 4022MK</b>	
Temperature Range	-100° to 1400°F/-73° to 760°C
Max. Tip Temperature	1400°F/760°C
Max. Cord Temperature	221°F/149°C
Response Time	20 seconds
Probe Type	Type K thermocouple
Shaft Length	5"
Cord Length	36" PVC straight cord
<b>Specifications: 6030MK/6050MK</b>	
Temperature Range	-100° to 500°F/-73° to 260°C
Max. Tip Temperature	500°F/260°C
Max. Cord Temperature	500°F/260°C
Response Time	<b>6030MK</b> - 2 seconds
Probe Type	Type K thermocouple
Shaft Length	<b>6050MK</b> - 0.5"
Cord Length	<b>6030MK</b> - 42" <b>6050MK</b> - 48"


**Model 1070MK**  
Puncture probe,  
semi-pointed tip,  
high temperature

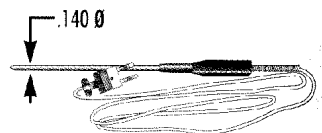


**Model 4022MK**  
5" surface probe

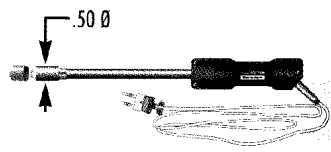

**Model 5000MK**  
Air probe with high  
temperature wire

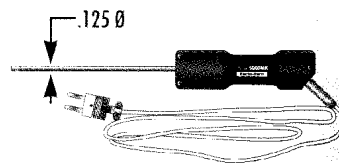

**Model 6030MK**  
42" bead probe



**Model 6010MK**  
36" flexible SS  
oven probe



**Model 6050MK**  
Flexible teflon probe



# Thermocouple Probes

With a wide variety of thermocouple probes, you can be sure that you will find what you are looking for when you choose Cooper. From puncture probes to surface probes your job is completed with confidence and pride in knowing your work is backed by quality probes that are designed for longevity.





**Model 1052MK**  
Needle probe



**Model 1070MK**  
Puncture probe, semi-pointed tip, high temperature



**Model 1075MK**  
Needle probe

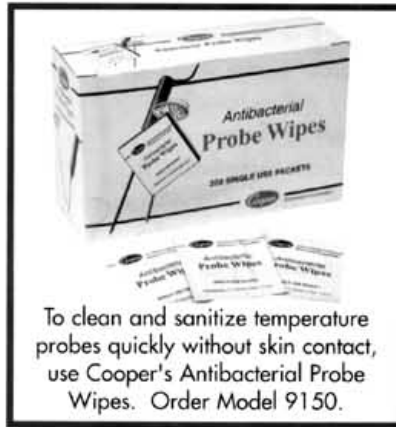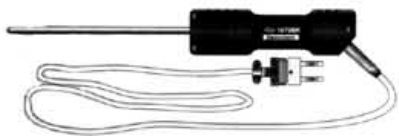

To clean and sanitize temperature probes quickly without skin contact, use Cooper's Antibacterial Probe Wipes. Order Model 9150.


**Model 2020K**  
Thermocouple air and surface probe with pigtail leads for PM400K



**Model 4022MK**  
Surface probe



**Model 5000MK**  
Air probe with high temperature wire

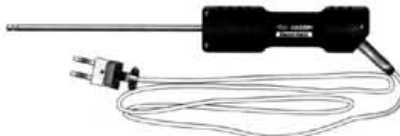

**Model 6010MK**  
36" flexible stainless steel oven probe



**Model 6030MK**  
42" bead probe



**Model 6050MK**  
Flexible teflon probe



**For complete specifications on these and our thermistor probe series, consult Cooper's *NEW* full line catalog.**

Cooper Instrument Corporation  
33 Reeds Gap Road, Middlefield, CT 06455-0450  
Telephone: 800-835-5011 860-347-2256  
Fax: 860-347-5135

[www.cooperinstrument.com](http://www.cooperinstrument.com)