



CORRECTIONAL TRANSPORT CART

COMBINATION HEATED & AMBIENT

for Compartment Trays

CARTER-HOFFMANN
 FOOD SERVICE EQUIPMENT
 HEATED TRANSPORT CARTS



CHA120
shown with optional tow hitch

Manufacturer	Tray Model	Covered Tray Size (in.)	Approx. Capacity* (each side)
Jones-Zylon	5000 Series	9.4 x 6.8 x 2.7	90
Jones Zylon	9000 Series	11 x 8.88 x 2.3	68
Plastocon	9113	11.19 x 9.19 x 2.75	56
Plastocon	9114	11.19 x 9.19 x 2.69	60
Design Specialties	E-300	8.63 x 6.63 x 2	162
Design Specialties	T-500	14 x 10.5 x 1.13	46**
Design Specialties	FC-431	10.63 x 9.56 x 2.63	56
Design Specialties	FC-442	10.63 x 9.56 x 2.63	56
Temp Tech	T3	6.81 x 9.19 x 1.94	120
Temp Tech	TK3	11.19 x 9.31 x 2.19	72
Temp Tech	T3M	8.56 x 6.56 x 2.06	171
Temp Tech	TVN3	9.44 x 6.81 x 2.5	96
Temp Tech	TKM5	11.19 x 9.31 x 3.06	52
Cambro	853FCW	8.88 x 6.5 x 2.06	114
Cambro	853FHP	8.88 x 6.5 x 2.06	114
Cambro	853FH	8.88 x 6.5 x 2.06	114
Various	Steam Table Pan	12" x 20" x 2.5"	24**
Various	Bun Pan	18" x 26" x 1"	12**

Trays not included.
Contact individual
manufacturers for
trays. Sample tray(s)
required with order.

* Capacity varies according to tray size. Trays NOT included. Contact individual manufacturers for trays. SAMPLE TRAY(S) REQUIRED WITH ORDER.

** Optional tray racks required.

Model Number	Cart Type	Capacity (see chart above) Inside Working Height in (mm)	Overall Dimensions			Caster Diameter		Shipping Weight (est.)		
			Height in mm	Width in mm	Depth in mm	in mm	in mm	lbs	kg	
<input type="checkbox"/> CHA120	Heated/Ambient	40 ^{3/4} (1035)	61 ^{1/2}	1562	60	1524	31 ^{1/2}	800	8 203	450 204

CONSTRUCTION... Completely welded cabinet construction and top corners, with outer cabinet formed to base and welded. All seams turned in to eliminate raw edges. All exposed fasteners are tamper resistant. No open crevices or holes. Cabinet divided into two parts with insulated divider between the sections.

CABINET MATERIAL... 300 series stainless steel construction; 18 gauge polished exterior and 18 gauge interior.

BASE FRAME... 12 gauge stainless steel full depth bolsters with 1"x1" 16 gauge stainless steel perimeter tube supports welded to bolsters. Bottom of cabinet completely covered to deter concealed contraband.

CASTERS... Six 8" diameter, industrial grade semi-pneumatic casters. Sealed roller bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and secured to base with tamper-resistant fasteners and hub threads. Offset wheel-ahead pattern. 4 swivel (corners); 2 rigid (center).

BUMPER... Heavy-duty 1/8 aluminum base with non-marking gray vinyl insert. Reinforced with brackets bolted and welded to body of cabinet. Additional reinforcements from bottom of bumper welded to base of cabinet.

INSULATION... 2" thick high density fiberglass insulation in sides, top, bottom, and center wall.

DOORS... Non-removable, welded double panel stainless steel; 18 gauge polished exterior and 18 gauge interior. Filled with fiberglass insulation. 270 degree door swing. Latchless design with magnetic closures.

HINGES... Heavy-duty 12 gauge stainless steel strap hinges with 3/8" stainless steel pins welded to each door and cabinet

TRANSPORT LATCH... Welded-on 12 gauge stainless steel transport latch with padlock provision.

PUSH HANDLES... Two 3/4" recessed horizontal full width stainless steel tubular push handles with back up plates. Set in 18 gauge recessed housing, reinforced and welded in place.

NESTED TRAY TRANSPORT... Covered trays nest and stack on floor. Optional tray racks for 12x20x2.5" or 18"x26" pans or Design Specialties T-500 meal trays.

THERMOMETER... Features digital display with remote sensing bulb.

HEATING MODULE... Top mounted heating system, removable with tools. Digital temperature control and display. Reinforced cord grip. Inconel-sheathed heating element. High impedance, internally cooled fan motor. Full range thermostat concealed for tamper-resistance. Power indicating light. Recessed covered controls secured with tamper-proof fasteners, accessed only with tools.

HEATER ELECTRICAL INFORMATION.. Operates on 120 volts, 60 Hz, 1Ph, 1000 watts, 8 amps.

HEATER PERFORMANCE... Baffle system to assure uniform heat distribution. Factory pre-set temperature of 175°F (79°C). Capable of heating to 200° F (94° C). Preheat to 175° F (79° C) in approximately 25 minutes.

SINGLE POWER CORD... Heating system connects to covered junction box. Single ten foot 3 wire rubber cord with 3 prong grounding plug. NEMA 5-20P.

ACCESSORIES/OPTIONS...

- Tow hitch (pin type)
- Tray racks; universal slides for pans
- Tray racks; for T-500 trays

Specifications subject to change through product improvement & innovation

CARTER-HOFFMANN

1551 McCormick Ave., Mundelein, IL 60060
 (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981
www.carter-hoffmann.com


SPECIFICATIONS

Printed in U.S.A. CHA120 1212
 Carter-Hoffmann is a trademark
 of Carter-Hoffmann LLC

FEATURES & BENEFITS

CORRECTIONAL TRANSPORT CART COMBINATION HEATED & AMBIENT for Compartment Trays

Since 1947, Foodservice Equipment That Delivers!

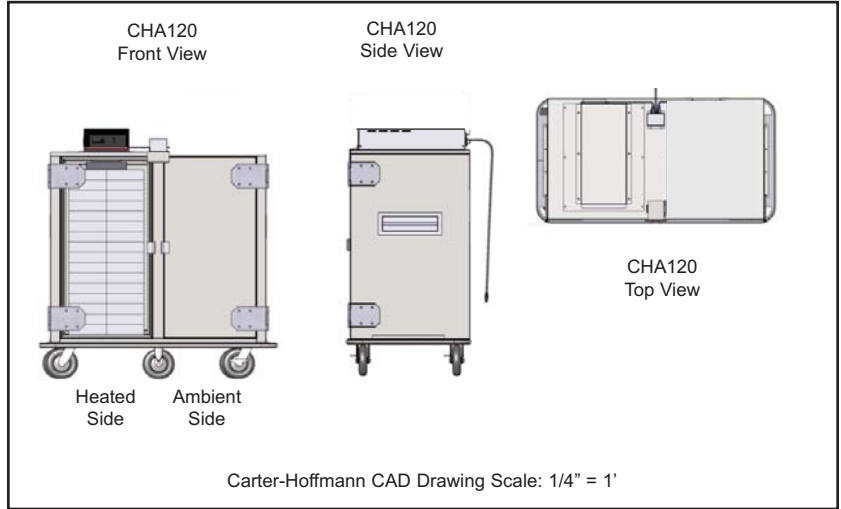

LIFT OFF HEATER MODULE...

Removable with tools. Ambient section to have stainless steel filler plate, secured in place with tamper-resistant fasteners. Electric connected to junction box. Power is combined into single 20 amp power cord.



DURABLE DESIGN FOR CORRECTIONAL ENVIRONMENT...

Heavy-duty features include tamper-resistant fasteners, all-welded construction, with strap hinges and concealed bottom to prevent concealment on contraband. Transport latch with padlock provision

RECESSED PUSH HANDLES...

Welded and bolted to cabinet. Flush with cabinet exterior for safety.



HEATER MODULE CONTROLS...

Electronic controls with digital display. Programmable temperature settings.



FULL PERIMETER BUMPER...

All aluminum with non-marking gray vinyl insert to protect cart and facility walls. Reinforced with angle brackets and bolted on to cabinet.



WHEEL-AHEAD CASTER CONFIGURATION...

For easy moving over thresholds and uneven surfaces. Six semi-pneumatic 8" large diameter casters for tight turning radius.



OPTIONAL PAN RACKS... Welded on extended angle slides at 3" spacing for 12"x20"x2.5" steam table pans and 18"x26" sheet pans (shown); pan racks for uncovered Design Specialties T-500 trays (not shown).

1551 McCormick Avenue, Mundelein, Illinois 60060
Tel. (847)362-5500 • (800)323-9793 • Fax (847)367-8981
www.carter-hoffmann.com

