

PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

SLT4

TrimLine L-Shaped Heated Tray Make-Up Serving Counters

Short Form Specifications

Exterior Body is constructed of 20-gauge stainless steel. Stress points are internally reinforced.

Exterior Top is constructed of 16-gauge stainless steel welded, ground and polished into one integral unit. Top has square exterior corners.


Top has (4) electrically heated, recessed, die stamped stainless steel hot food warmers. Food warmers are fully insulated on all sides and bottom with (1" (2.54cm) of fiberglass matting and each is covered with a galvanized steel jacket. Each food warmer has (1) heating element, rated at 1000 watts for 208 volt electrical service and wired to an individually adjustable temperature control indicator light in the control panel. Food warmers are wired together to an ON/OFF switch in the control panel. Each food warmer accommodates (1) 12.75" x 20.75" x 6" deep pan (32.4cm x 52.7cm x 15.2). Pans are provided by others. NOTE: Drains are optional.

Control Panel is die-stamped stainless steel and is installed on the exterior at the inner corner of the "L".

Electrical connection is 208-230 volts, 60 Hertz, single phase. Unit has 10' (2.7m) long cord and NEMA 6-30P plug.

Unit is mounted on 6" (15.2cm) flanged stainless steel feet.

NOTE: Model SLT4-L has the "L" corner on the left hand side of the server; model SLT4-R has the "L" corner on the right hand side of the server.

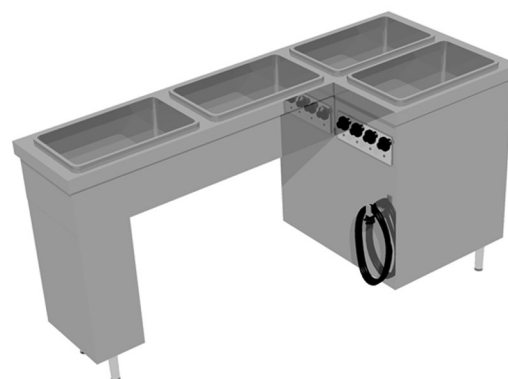

Model SLT4

Optional Accessories and Modifications

Q) *115/208 volt, 15 amp electrical outlet with 10 amp breaker







J) 12" (30.5cm) wide stainless steel overshef

E) Stainless steel fold-down work shelf

QQ) Drains plumed to a common valve

*Inclusion of this option will alter electrical specifications of the unit.

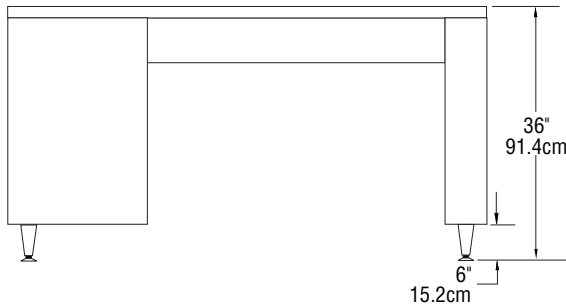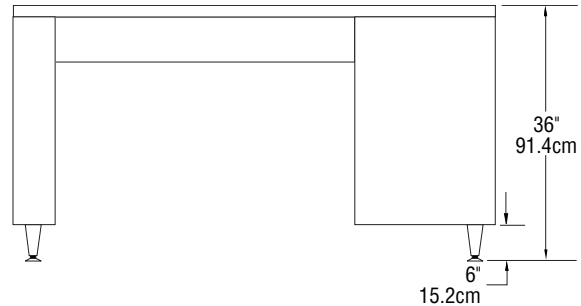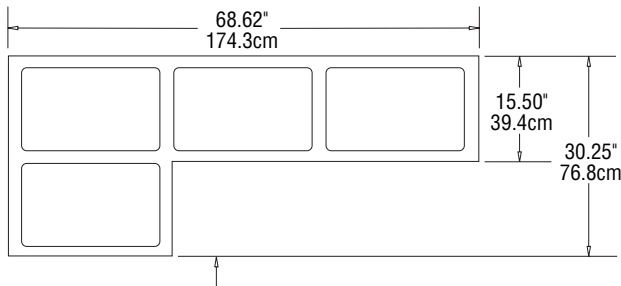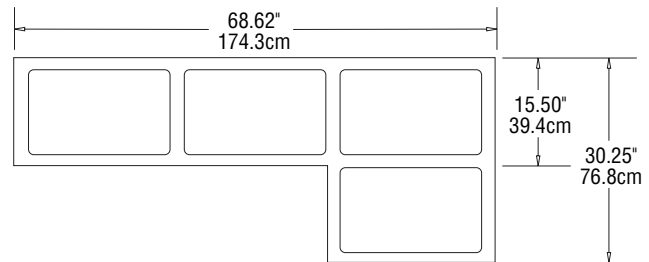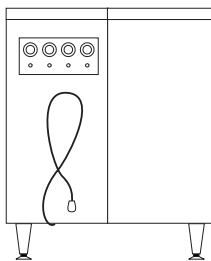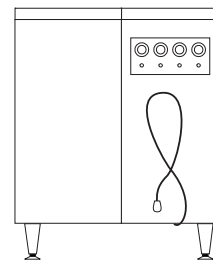

TrimLine L-Shaped Heated Tray Make-Up Serving Counters

**ELEVATION VIEW
SLT4-L**

**ELEVATION VIEW
SLT4-R**

**PLAN VIEW
SLT4-L**

**PLAN VIEW
SLT4-R**

**END VIEW
SLT4-L**

**END VIEW
SLT4-R**
Mechanical Data—Standard Unit

MODEL NUMBER	PAN CAPACITY	VOLTS/HERTZ/ PHASE	AMPS @ 208V	AMPS @ 230V	NEMA PLUG	SHIP WEIGHT
SLT4-L	4	120/208-230/60/1	20.0	29.0	6-30P	300 lbs/136 kg
SLT4-R	4	120/208-230/60/1	20.0	29.0	6-30P	300 lbs/136 kg