

DBC-1 Baking Center









CATALOG NO. 9541

consisting of a 5/9 oven on PFB-1 proofer base

OVERALL DIMENSIONS:

(oven and proofer)

Height:

68"

Width:

30"

Depth: 30"

5/9 CONVECTION OVEN MODEL:

See individual specification sheets for detailed information.

59-E3W:

Electrically heated oven with solid state time, temperature control and pulse fan option, baking control, and 2-speed

59-E3ZX:

Electrically heated oven with push button solid state time and temperature control and 5 programmable menu buttons, 5 rack ID timers and 2-speed blower motor.

59-E3ZZ:

Electrically heated oven with push button solid state time, temperature control and 16 programmable menu buttons, 5 rack ID timers, 2-speed blower motor, an auxillary back up thermostat system plus fan delay gentle pulse.

PROOFER SPECIFICATIONS:

Proofer Exterior:


Stainless steel front, sides, back and top. Proofer door to have large tempered glass with an extruded aluminum frame with a silicone gasket and magnetic seal. Door to be spring loaded/self closing. Unit mounted on 6" polyurethane casters (2 with locks/swivel).

Proofer Interior:

Proofer cavity to be constructed of stainless steel. An eight (8) level rack guide will hold up to 16 each 13" x 18" baking sheets.

Proofer Controls:

Main on/off power switch. Solid state (RTD) temperature control from 85°-160°F, with 3 different zone settings; proof/warming/holding. Humidity is controlled through an infinite switched dial. Humidity range from zero to high. A one hour electric dial type timer, with continuous sounding buzzer is mounted on the control panel. A fractional HP fan blower gently circulates moist air throughout the proofer cabinet. Water reservoir holds 2 quarts of water.

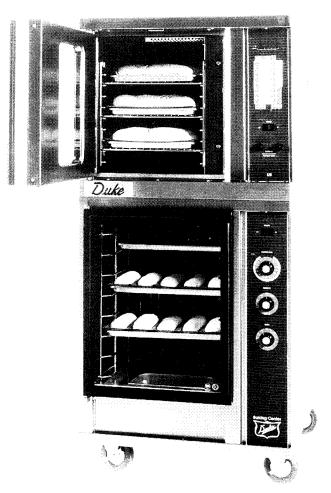

DBC-1 consisting of 59-E3ZZ/PFB-1 shown


Proofer Heating System:


Total of 1545 watts heating elements; 1045 watts required to control temperature and 500 watts utilized for humidity control Proofer operates on 120 volts and draws 13 amps. Six foot cord and plug supplied.

WARRANTY:

A 1/10 warranty consisting of one (1) year parts and labor on the entire proofer/oven (excluding consumables) and an additional 10 year limited oven door warranty is standard.



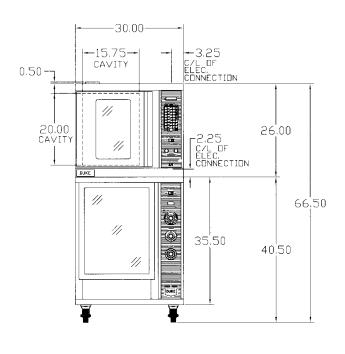

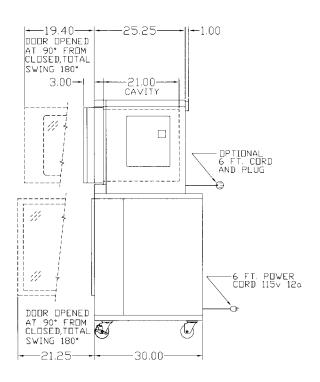

FRONT VIEW

SIDE VIEW

DBC-1 BAKING CENTER 59E3ZZ DVEN/PFB-1 PRODFER

00835

Model	Depth		Width		Height		Cube crated ft.	Weight	
	in.	cm	in.	cm	in.	cm	Cube crated it.	lbs.	kg
59-E3 Oven	25-1/4	64.1	30	76.2	26	66.0	14.2	265	120.5
PFB-1 Proofer Base	30	76.2	30	76.2	40	101.6	24.9	190	86.4

	Electrical Specifications						
Model	KW per section	Voltage/Phase per section	Amperage per section				
59-E3 Ovens	8.0	208/1 • 208/3 240/1 • 240/3	40 • 24 35 • 21				
PFB1	1.5	120/1	13				