

Profit from the Eagle Advantage®

Specification Sheet

Short Form Specifications

Eagle Hot Food Tables, Spec-Master® Series, model _ enclosed base design. Top and body to be heavy gauge type 430 stainless steel (Open Front or Sliding Doors). Beaded top openings to be 12½" x 20½". Heating compartments to be 8" deep, galvanized, and insulated on all four sides and bottom with 1" fiberglass or equal. Each compartment to have individual burner rated at 3.500 BTU. Each burner controlled by a high/medium/low adjustable gas valve with adjustable pilot light. Removable galvanized steel radiation plate in each compartment, and gas pressure regulator provided. 8" wide polycarbonate cutting board provided. 7½"-high legs to be 1½" 0.D. stainless steel tubing, with adjustable non-marking bullet feet.



#HT3OB-NG unit with open front

Serving shelves

☐ Stainless steel feet

■ Decorative laminates

☐ Spec-Master® marine edge

☐ Propane hose kit

Options / Accessories

- ☐ Spillage pans
- ☐ Rolltop cover
- Overshelves
- ☐ Food pans/insets
- ☐ Tray slides/shelves
- Dish shelves
- * See Catalog Sheet #EG30.18 for more information on Flex-Master® overshelves

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

For custom configuration or fabrication needs, contact our SpecFAB® Division. Phone: 302-653-3000 • Fax: 302-653-3091 • e-mail: specfab@eaglegrp.com

Item No.:	
Project No.:	
S.I.S. No.:	

Spec-Master® Gas Hot Food Tables—Enclosed Base

MODELS:

☐ HT2CB-NG	☐ HT3CB-LP	☐ HT40B-NG	☐ HT50B-LF
☐ HT2CB-LP	☐ HT30B-NG	☐ HT40B-LP	☐ HT6CB-NO
☐ HT20B-NG	☐ HT30B-LP	☐ HT5CB-NG	☐ HT6CB-LF
☐ HT20B-LP	☐ HT4CB-NG	☐ HT5CB-LP	☐ HT60B-NO
☐ HT3CB-NG	☐ HT4CB-LP	☐ HT50B-NG	☐ HT60B-LF

Construction

- 20 gauge cabinet body and 22 gauge top are polished type 430 series stainless steel.
- Top shall have die-stamped beaded openings measuring 12½″ x 20½″ (307 x 510mm).
- A poly cutting board 8" wide x ½" thick (203 x 13mm) are mounted on stainless steel brackets located on control side
- Legs are 1%" (41mm) O.D. stainless steel tubing fitted with adjustable, non-marking plastic feet.

Heat Compartments

- Under each top opening is a heat compartment with a die-formed 8" (203mm)-deep heavy-gauge galvanized liner.
- Each compartment is insulated on all four sides and bottom with 1" (25mm)-thick fiberglass or equal, having a thermal conductivity of 0.27 or less.

Gas Heat Units

- Each compartment has an individual burner rated at 3,500 BTU designed for use with natural or propane gas as specified.
- Each burner is controlled by High/Medium/Low adjustable gas valve with adjustable pilot light.
- A removable galvanized steel radiation plate shall also be provided in each compartment and a gas pressure regulator furnished with all units.

Sliding Doors (when indicated)

Certifications / Approvals

- 22 gauge stainless steel construction complete with recessed stainless steel handle.
- Doors shall sit within an exclusive rollerless track assembly providing easier cleaning and lower maintenance.

AUTOQUOTES








EG30.06 Rev. 04/11

Item No.:	
Project No.:	
S.I.S. No.:	

Spec-Master® Gas Hot Food Tables—Enclosed Base

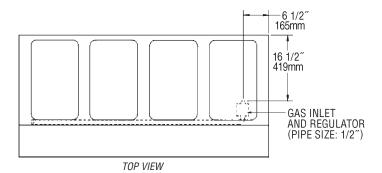





WITH OPEN FRONT model #	WITH SLIDING DOORS model #	type of gas	# of openings	total BTU rating	length in. mm	weight Ibs. kg
HT2OB-NG	HT2CB-NG	natural gas	2	7,000	33″ 838	207 93.9
HT2OB-LP	HT2CB-LP	liquid propane	2	7,000	33″ 838	207 93.9
HT3OB-NG	HT3CB-NG	natural gas	3	10,500	48″ 1219	248 112.5
HT3OB-LP	HT3CB-LP	liquid propane	3	10,500	48″ 1219	248 112.5
HT40B-NG	HT4CB-NG	natural gas	4	14,000	63½″ 1613	289 131.1
HT4OB-LP	HT4CB-LP	liquid propane	4	14,000	63½″ 1613	289 131.1
HT5OB-NG	HT5CB-NG	natural gas	5	17,500	79″ 2007	330 149.7
HT5OB-LP	HT5CB-LP	liquid propane	5	17,500	79″ 2007	330 149.7
HT6OB-NG	HT6CB-NG	natural gas	6	21,000	94½″ 2400	375 170.1
HT6OB-LP	HT6CB-LP	liquid propane	6	21,000	94½″ 2400	375 170.1

FLEX-MASTER® Overshelf Kits

Both kits include two 16/304 overshelves and four 30" (762mm) posts. Add suffix specified to order kit (example: DHT2-120-FMU), or design your own using standard components from EG30.18.

description	add suffix
10" (254mm) overshelves	-FM
15" (381mm) overshelves,	-FMU
plus one ladle rack	

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 • Fax: 302-653-2065

www.eaglegrp.com

Foodservice Division: Phone 800-441-8440 MHC/Retail Display Divisions: Phone 800-637-5100

Printed in U.S.A. ©2011 by Eagle Group

Rev. 04/11