

ITEM:	PROJECT NAME:	DATE:

# SERIES '90 REFRIGERATED BAKERY CASE

MODEL	<b>SNR-4850</b>
	<b>SNR-59SC</b>



Series '90. The ultimate merchandiser with advanced styling for maximum visual appeal. Cases are available in lengths of 48", 59", and 77". Designed for continuous case line-ups.


## STANDARD FEATURES

- Adjustable white cantilevered wire shelves. Shelves are adjustable up and down, and can also be tilted.
- Lift-up pneumatic, cylinder-assisted, double-curve tempered front glass.
- Four-point leveling system.
- Removable sliding rear doors, shelf lights, shelf supports, and shelves.
- Glass ends and rear doors. Rear doors are sloped for product access.
- Octron top light and shelf lights. Lights are shielded and independently wired.
- All-welded base construction with a choice of six standard laminates on base. Other finishes optional.
- Easily accessible control panel with main power switch, light switch, digital thermometer, and adjustable temperature control.

- Base trim: specify white, black, or stainless.
- End glass trim: specify white or black.
- Double-bend tempered front glass reduces glare from outside lighting.
- Case height is only 48" high allowing better interaction between the customer and the sales clerk.
- White display deck.
- Condensate evaporator for a totally self-contained system.
- Average case temperature of 38° to 40°F is maintained without condensation on the front glass.
- Over-sized coil and low-velocity fan system maintains high humidity and product freshness.
- Pull-out condensing unit for quick and easy service.
- R134A Refrigerant.
- UL Safety and UL Sanitation Listed.

## SERIES '90 REFRIGERATED BAKERY CASE

#### **OPTIONAL ACCESSORIES:**

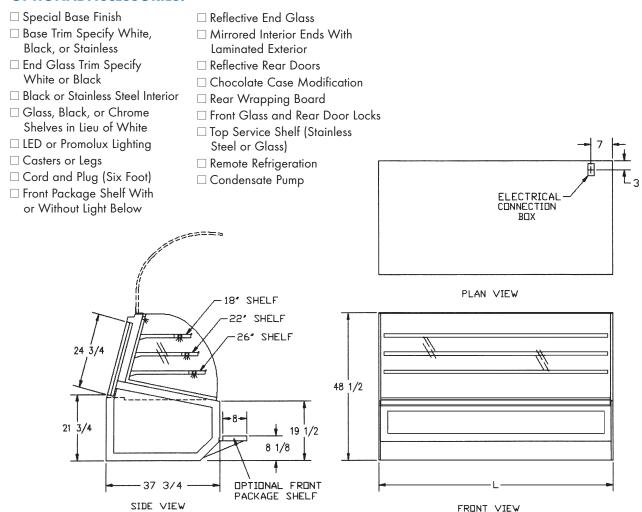

### **SPECIFICATIONS:**

Model	Dimensions L W H	Shipping Weight (lbs)	Capacity (Bakery Pans)	Self-Contained 120/60/1	Remote 120/60/1
□ SNR-48SC	48 1/4" x 37 3/4" x 48 1/2"	750	4 (18" x 26") 8 (12" x 18") 2 ( 9" x 26")	1/2 HP • 12 AMPS	13.2 AMPS
□ SNR-59SC	59 1/4" x 37 3/4" x 48 1/2"	825	6 (18" x 26") 8 (12" x 18")	1/2 HP • 12 AMPS	13.2 AMPS
□ SNR-77SC	77 1/4" x 37 3/4" x 48 1/2"	1,050	8 (18" x 26") 12 (12" x 18")	3/4 HP • 16 AMPS	17.3 AMPS

- Cases are designed to operate in a maximum environment of 75° ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.







#### **FEDERAL INDUSTRIES**

A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206 EMAIL: geninfo@federalind.com FAX: 608-424-3234 WEBSITE: www.federalind.com

