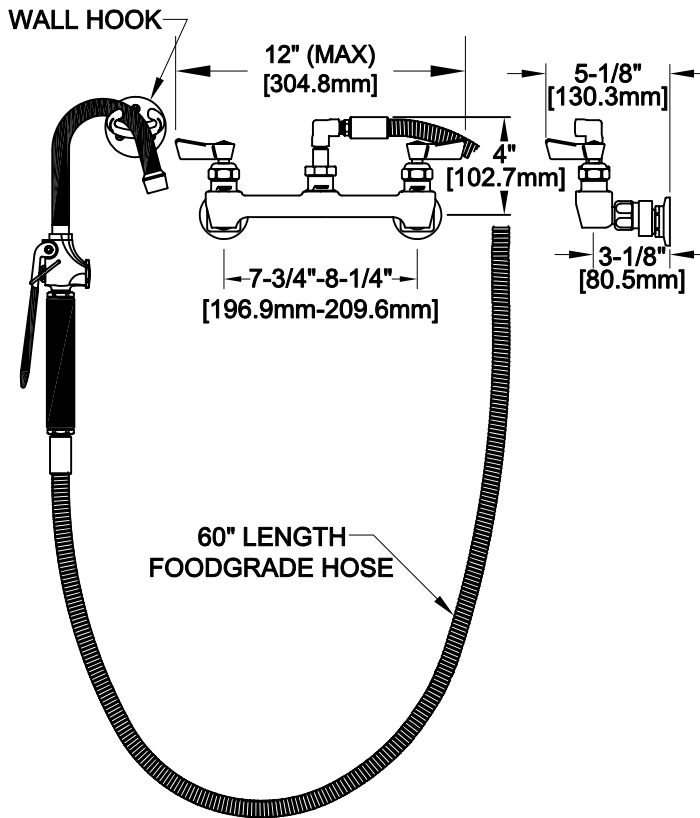
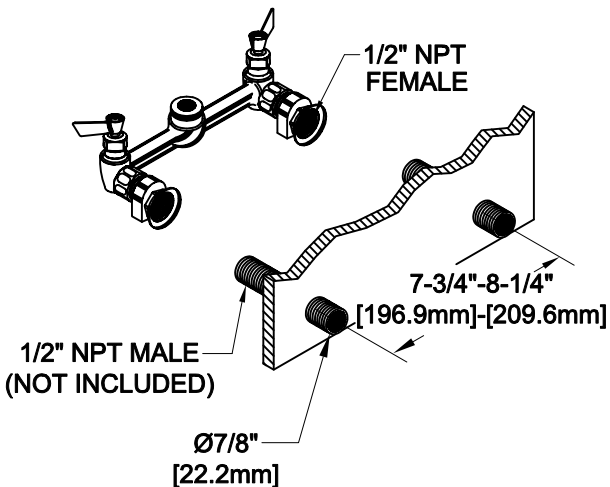


APPLICATION:		PRODUCT NAME: POT FILLER HOSE STYLE 8" C/C ADJUSTABLE WALL MOUNT	
JOB NAME:		☐ SPECIAL CONFIGURATION CHECK BASE MODEL AND OPTIONS	
QUANTITY:	ITEM NO.	MODEL: ☐ 2250	
 WALL HOOK 12" (MAX) [304.8mm] 5-1/8" [130.3mm] 4" [102.7mm] 7-3/4"-8-1/4" [196.9mm-209.6mm] 3-1/8" [80.5mm] 60" LENGTH FOODGRADE HOSE		OPTIONS OR MODIFICATIONS: ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ ADD-ON FAUCET (6", 8", 10", 12", 14", 16") CIRCLE LGTH ☐ BACKFLOW PREVENTER ☐ PIPE HOOK ☐ NIPPLES ☐ ELBOWS ☐ VANDAL RESISTANT KIT ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ OTHER _____	
		FEATURES: CONTROL VALVE * 8" C/C ADJUSTABLE WALL MOUNT * ECCENTRICS ADJUST FROM 7-3/4" TO 8-1/4" * INTERNAL SPRING LOADED CHECK VALVES * SWIVELING SEAT DISKS * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS HOSE * 60" LENGTH * STAINLESS STEEL END FITTINGS * STAINLESS STEEL EXTERNAL JACKET * BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE POT FILLER VALVE * NON SCRATCHING/ MARRING TUBE * 5.00 GPM AT 80 PSI * AERATED STREAM SWIVEL ELBOW * 360° TURNING RADIUS SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC SHIPPING WEIGHT * 9.0 LBS	
ROUGH-IN:  1/2" NPT FEMALE 7-3/4"-8-1/4" [196.9mm]-[209.6mm] 1/2" NPT MALE (NOT INCLUDED) Ø7/8" [22.2mm]		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com	
 ANSI/A112.18.1M			