

JOB NAME:

QUANTITY:

ITEM NO.:

PRODUCT NAME:

**8" ADJ. WALL MOUNT HOSE STYLE  
POT FILLER**

■ 97594 SPECIAL CONFIGURATION  
(CHECK BASE MODEL AND OPTIONS)

MODEL:

■ 2240

OPTIONS OR MODIFICATIONS:

- ☐ SUPPLY LINES (24" OR 36") CIRCLE LGTH
- ☐ ADD-ON FAUCET (6",8",10",12",14",16") CIRCLE LGTH
- IN-LINE DUAL CHECK VALVE
- ☐ PIPE HOOK
- NIPPLES
- ELBOWS
- ☐ VANDAL RESISTANT KIT
- ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE
- OTHER 72" HOSE FG

FEATURES:

**CONTROL VALVE**

- \* ECCENTRICS ADJUST FROM 7-1/2" TO 8-1/2"
- \* INTERNAL SPRING LOADED CHECK VALVES
- \* SWIVELLING SEAT DISKS
- \* HOT SIDE STEM - RIGHT HAND
- \* COLD SIDE STEM - LEFT HAND
- \* STAINLESS STEEL SEATS
- \* STAINLESS STEEL SEAT SCREWS
- \* STAINLESS STEEL HANDLE SCREWS

**HOSE**

- \* 72" LENGTH
- \* STAINLESS STEEL END FITTINGS
- \* STAINLESS STEEL EXTERNAL JACKET
- \* BRAIDED USDA APPROVED FOODGRADE INTERNAL HOSE
- \* REPAIRABLE IN FIELD WITH SIMPLE TOOLS

**POT FILLER VALVE**

- \* NON-SCRATCHING/ MARRING TUBE
- \* 5.0 GPM AT 80 PSI
- \* AERATED STREAM

**SWIVEL VACUUM BREAKER**


- \* 360° TURNING RADIUS
- \* ATMOSPHERIC VACUUM BREAKER

**SYSTEM LIMITS**


- \* TEMP: 40°F MIN. TO 140°F MAX.
- \* PRESSURE 200 PSI MAX. STATIC

**SHIPPING WEIGHT**

- \* 12.0 LBS

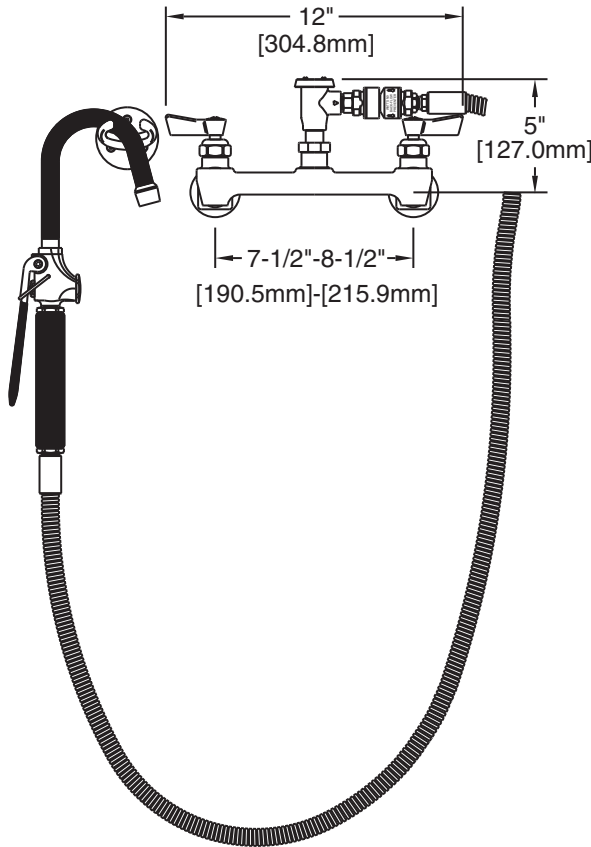

ROUGH-IN:

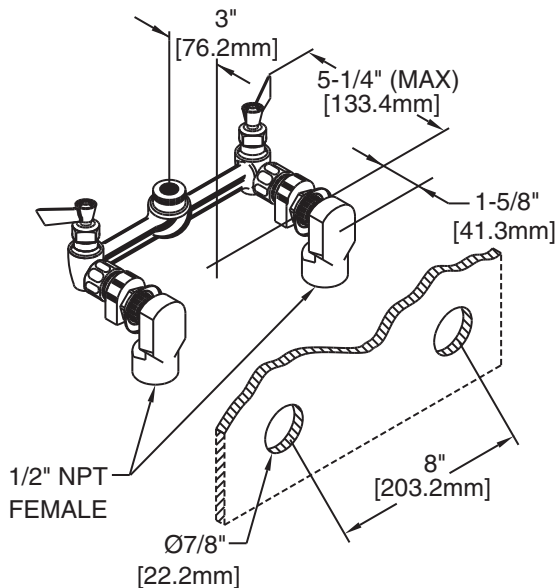

ANSI/A112.18.1M

FISHER MANUFACTURING COMPANY  
1900 SOUTH "O" STREET, TULARE, CALIFORNIA 93274  
MAILING ADDRESS: P.O. BOX 60, TULARE, CALIFORNIA 93275  
PHONE: (800) 421-6162 FAX: (800) 832-8238  
MADE IN U. S. A.