

Shown with SensorSAFE™

SensorSAFE infrared dispense



SensorSAFF not recommended for use with clear containers or for applications in direct sunlight

Ice and water dispensers, 115V/60 Hz				
Ice storage capacity	Dispense	Ice machine cooling	Item number	
12 lb	Lever	air	12CI425A-L	
(5.4 kg)	SensorSAFE	air	12CI425A-S	

Ice-only available, add -I Example: 12CI425A-LI

Ice production				
Temperatures air/water	70/50 F (21/10 C)	90/70 F (32/21 C)		
Air-cooled	425 lb (193.0 kg)	325 lb (147.6 kg)		
Energy consumption per 100 lb (45.4 kg) ice	N/A	6.3 kWh air-cooled		
Water consumption	12.0 gal (45.4 L) of potable water per 100 lb (45.4 kg) of ice			

Symphony Plus[™] ice and water dispenser

12 CI series countertop with Chewblet[®] ice machine

Features

Narrow, 16.12" (40.9 cm) width

12 lb (5.4 kg) ice storage capacity

Integral air-cooled ice machine with up to 425 lb (193.0 kg) daily production of popular Chewblet ice

- soft, chewable, compressed nugget ice is preferred over cubes¹ and is ideal for patient care
- New Quiet Night[™] sleep mode turns off ice machine when idle

Designed with sanitation in mind

- New automatic self-flushing of ice machine removes impurities
- drain cup provides internal air gap for added protection of food zone components from drain line contaminants
- Agion® silver-based antimicrobial provides protection of key ice and water contact components²
- one-hand lever or SensorSAFE infrared ice dispense

Dependable design, easy to service and clean



- New cleaning and sanitizing of entire machine takes only 1 hour
- New LED display control board provides at-a-glance machine status
 - panels are easily removed for accessibility to all components
 - ice machine parts are common across all Symphony Plus dispensers
 - stainless steel evaporator and auger deliver long life

Environmentally responsible

- meets Consortium for Energy Efficiency Tier 2 specifications
- R404a refrigerant has zero ozone depletion potential
- ice-only dispensers are ENERGY STAR® certified
- continuous ice making process uses less electricity and water

Durable, attractive dispenser

- frame and exterior cabinet are stainless steel with accent trim
- poly drain pan, grille and dispenser lid are corrosion-resistant

Easy installation and industry's best warranty

- comes fully assembled and installs with three easy connections – electric, water and drain
- warranty 3 years parts and labor, 5 years compressor parts

Accessories

Base stand (item# AF12CABINET)

4.00" (10.16 cm) leg kit (item# AF10LBLEGS)

SafeCLEAN[™] environmentally responsible ice machine cleaner (item# 00132001)

Nu-Calgon® IMS-II sanitizer, 16 oz bottle (item# 00979674)

Additional filters (refer to form# 6380, 9905, 6070)

Additional Symphony Plus accessories (refer to price list)





Specification		
Ice storage capacity	12 lb (5.4 kg)	
W1 Width	16.12" (40.9 cm)	
W2 Width, base stand accessory	17.5" (44.4 cm)	
D1 Depth, dispenser	23.50" (59.7 cm)	
D2 Depth, drain pan	5.50" (13.97 cm)	
D3 Depth, base stand accessory	22.00" (55.9 cm)	
H1 Height, dispenser	32.50" (82.6 cm)	
H2 Dispense height clearance	9.38" (23.83 cm)	
H3 Height, base stand accessory	33.00" (83.8 cm)	
Ventilation clearance	6.00" (15.24 cm) top and right side	
Service clearance	12.00" (30.5 cm) top	
Utility connection location	through back or bottom	
C1 115 V/60/1 electrical	11 amps, 0.8 kW 8.5' (2.6 m) cord w/ NEMA 5-15 90° hospital-grade plug	
C2 Potable water inlet	3/8" FPT	
C3 Drain	3/4" MPT	
Air temperature	50 -100 F (10 - 38 C)	
Water temperature	45 - 90 F (7 - 32 C)	
Water pressure	10 - 70 psi (69 - 483 kpa)	
Heat rejection	5000 BTU/hr	
Approximate ship weight	199 lb (90.3 kg)	
Approximate ship weight, base stand accessory	80 lb (36.3 kg)	

NOTE: For indoor use only

SHORT FORM SPECIFICATION: (Choose one) ___ Ice and water or ___ ice-only dispenser to be Follett® automatic load in countertop configuration, with 12 lb (5.4 kg) of storage and separate ice and water chutes. Dispenser cabinet to be of stainless steel. Environmentally responsible R404a air-cooled ice machine to have 24 hour production capacity of approximately 425 lb (193.0 kg) of Chewblet compressed nugget ice at water temp. of 70 F (21 C); air temp. of 50 F (10 C). Ice machine to be equipped with automatic self-flushing and Quiet Night sleep mode. Dispenser to have automatic bin level control to start and stop ice machine. Storage area to be insulated with non-CFC, high density, foamed-in-place polyurethane. 8.5' (2.6 m) cord and NEMA 5-15 90° hospital grade plug provided. NSF and ETL listed.

Dimensional drawing

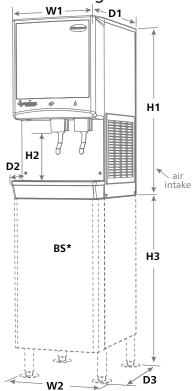

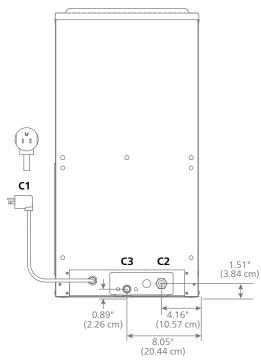

BS*- Base stand sold separately; measurements shown are with basestand legs at lowest position

Note: See dispenser detail sheet, form# 6675, for counter cutouts.

- 1 Independent third party studies. Contact Follett for details.
- Disclaimer: Antimicrobial protection is limited to the treated components and does not treat water or ice.

Agion is a registered trademark of Sciessent LLC.

ENERGY STAR and the ENERGY STAR mark are registered US marks.

Calgon is a licensed tradename distributed by Nu-Calgon, in the United States.

Symphony Plus, SensorSAFE, SafeCLEAN and Quiet Night are trademarks of Follett Corporation.

Chewblet and Follett are registered trademarks of Follett Corporation, registered in the US.

Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.



