

Models:

☐ 36ES11

36 E Series Heavy Duty Range Match Fryer

36ES11-SF

Item:	
Quantity:	
Project:	
Approval:	
Date:	

Electric 18" Wide,
30 Pound Capacity Fryer



Standard Features:

- · Stainless steel front and sides
- 12kW (36ES11) & 16kW (36ES11-SF) versions available
- 30 Lb. (14kg) shortening capacity, 1 piece deep drawn, heavy gauge nickel-plated steel tank equipped with lift handles and 1" (25mm) drain valve located at the bottom
- · 2 chrome wire baskets
- Electromechanical thermostat with temperature control range of 200°F (93°C) to 375°F (190°C)
- Incoloy sheath heating elements that swing up out of the way for tank removal
- Storage cabinet with door; comes with slides for optional additional fry-tank
- 6" (152mm) adjustable chrome plated legs (NSF)
- 1 Year limited parts & labor (USA & Canada)

Optional Features:

- Stainless steel main back
- ☐ Stainless steel tank cover
- Fish plate
- Extra fry tank
- Extra fry tank with 1" (25mm) drain valve
- 6" (152mm) adjustable stainless steel legs
- ☐ High voltage 460V
- Set of (4) Polyurethane (nonmarking) swivel casters complete with front brakes
- Marine accessories of hand rails, and deck fasteners

NOTE: Fryers supplied with casters must be installed with an approved restraining device.

Specification:


Heavy-duty range match fryer with 30 Lb. (14kg) shortening capacit. One piece deep drawn, nickel plated fry tank complete with lift handles. An 1" (25mm) drain valve is located at the bottom of the tank. Incoloy sheath elements swing up and out of the way for easy removal of the fry tank. The cabinet is designed with slides to accept an optional additional fry tank. Stainless steel front and sides. Model 36ES11 is rated 12.0kW and 36S11-Sf 16.0 kW. Fryers are available with casters or for dais mount.

NOTE: The models shown above may be paired together to form a common unit. They may be paired with a frymate model or may be set up as fry-stations of two fryers with a frymate unit between them. These fryers are designed to battery with 36E series heavy-duty ranges.





		Three Phase KW			Nominal Ampers Per Line											
Model	Total	per Phase 208, 240, 460		per Phase 1 Phase				Three Phase								
Model	KW			200 240	160	208			240			460				
		X-Y	Y-Z	X-Z	208	240	460	X	Υ	Z	X	Υ	Z	X	Υ	Z
36ES11	12	4	4	4	58	51	26	33	33	33	30	30	30	15	15	15
36ES11-SF	16	4.5	4.5	7.0	77	68	35	49	38	49	43	33	43	22	17	22

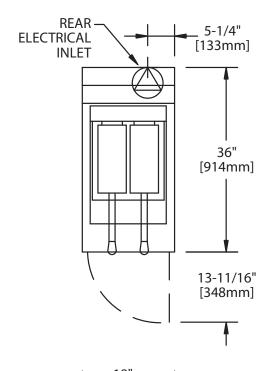



Model	Shipping Information						
Model	WT Lbs/Kg	Cu Ft					
36ES11	265/120	25					
36ES11-SF	275/125	25					

Available Voltages: 208 VAC (197-219); 240 VAC (220-240); 460 VAC (440-480).

When ordering specify voltage and phase.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.





Form# 36ES11 (03/26/13)

